

# 6313 & 6314 2.4GHz Transmitter & Receiver

# herga

Technology Ltd

- Wireless controls operating on 2.4GHz ,16 channels
- 1-10 buttons
- Momentary switches as standard, latching available on request
- 5 or 11 relay 12/24V DC receivers (IP66)
- Standard range 30-40 metres
- Simple pairing set up
- Additional transmitters can be connected to 1 receiver
- Operates with standard AAA batteries (Handsets A & B)  
Rechargeable li-ion (Handset C)
- Operating Temperature -20°C to +55°C
- Transmitters rated IP66/7
- Customised overlays available for OEMs



## Handset design



Handset A



Handset B  
3 button



Handset B  
6 button



Handset B  
10 button



Handset C

## Ordering information

Transmitter **6313** -     Z -

Handset Style:

- A
- B
- C

Number of Buttons:

- 3
- 6
- 8
- 10

Operating Mode:

- A = Continuous mode
- B = Discontinuous mode  
(Unavailable for Handset C)

PITCH TECHNOLOGIES

Votre distributeur agréé HERGA en France  
6 rue de la Prévôté  
78550 HOUDAN

☎ 01 34 85 54 68

🌐 <https://pitch-technologies.fr>  
✉ [info@pitch-technologies.fr](mailto:info@pitch-technologies.fr)



Subject to change without notice

# 6313 & 6314 2.4GHz Transmitter & Receiver

# herga

Technology Ltd

## Ordering information

### Receiver

6314 -

### Relays:

A = 5 Relay  
B = 11 Relay

### Programming Mode:

A = Continuous mode, Interlocking switches, Momentary action  
B = Continuous mode, Non - Interlocking switches, Momentary action  
C = Discontinuous mode, Interlocking switches, Momentary action  
D = Discontinuous mode, Non-Interlocking switches, Momentary action

### Definitions:

In discontinuous mode the handcontrol only transmits when a button is pressed whereas in continuous mode the handcontrol constantly transmits while it is turned on.


Use of continuous mode allows the receiver to always be aware of the status of the handcontrol which can enable the use of more advanced features.

Interlocking – Allows only one button to be switched at any one time.




## Reference dimension


Handset A

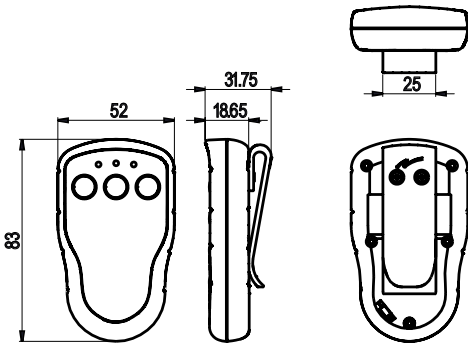


Handset B

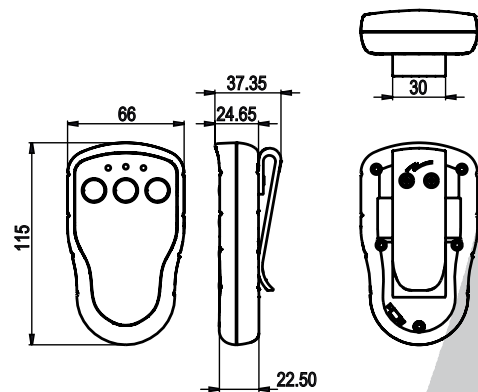

Handset C

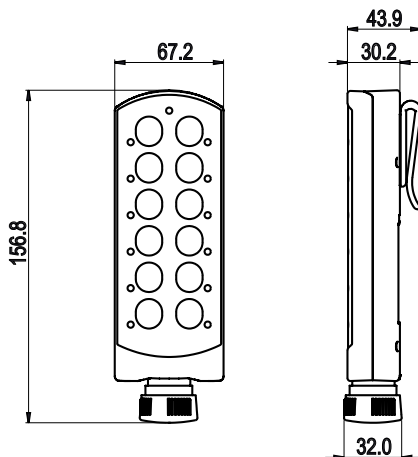

Control Box

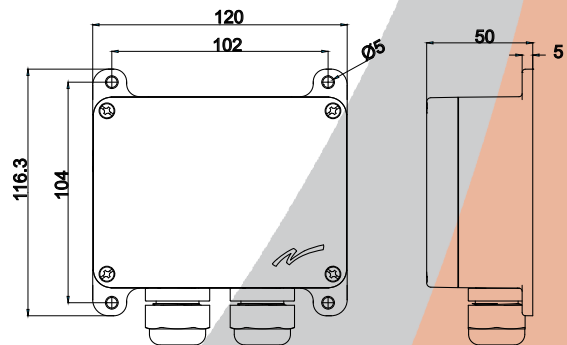

PITCH TECHNOLOGIES

01 34 85 54 68

info@pitch-technologies.fr



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK  
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice