


Roller 50 / Roller 51

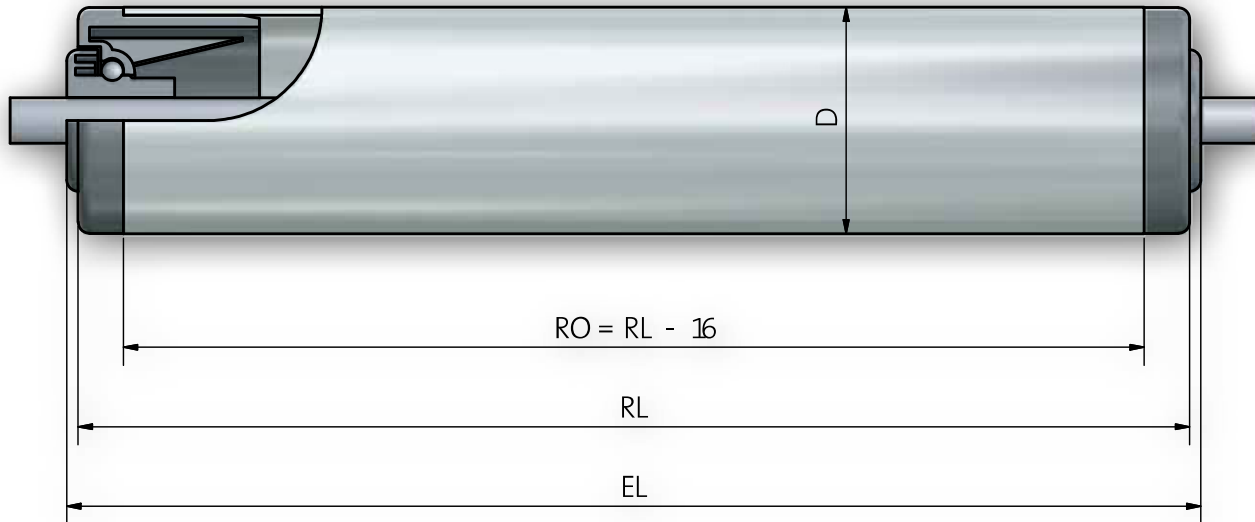

Shaft dimensions

Order Specification		A...M...	A...JGM...	A...glatt	A...FA...
Shaft- ϕ	EL=				
5	RL+			2	2
6	RL+	15		5	5
8	RL+	18	5	5	5
10	RL+	17	5	5	5

Tube- and Shaft Combination

Tube dia.	A5	A6	A8	A10
16 x 1	x			
20 x 1,5		x	x	
30 x 1		x	x	x
30 x 1,8		x	x	x
32 x 2		x	x	x
40 x 1,5		x	x	x
40 x 2,3		x	x	x

Roller 50 / Roller 51

Bearing Type

Type of Bearing
Load Capacity/Roller
Max. Speed
Range of Temperature Celsius
Optional
Note

Thermoplastic synthetic material - Bearing Site

Ball Row
100N (depending upon the load limit of tube and shaft)
0,3 m/s
-5 to +40 C
Type 51 (Balls Stainless Steel 1.4034)
Gravity Roller - not for use as driven roller.
Tube dia. 16 mm only available with shaft dia. 5 mm.
For tube dia. 16 mm RO = RL - 14.

Order Example

Type **50 - 20x1,5 KB A8 FA EL=200mm**

Bearing Type.....

Tube-Ø and wall thickness

Tube quality

Shaft-Ø

Shaft Ends

Installation length