




LITHIUM BATTERY
PILE LITHIUM

MAIN INFORMATION / INFORMATIONS GÉNÉRALES





SIZE	FORMAT	L91 - AA
BRAND	MARQUE	Microbatt
TECHNOLOGY	TECHNOLOGIE	Lithium Iron Disulfide / Lithium Fer
NOMINAL VOLTAGE	TENSION NOMINALE	1.5V
NOMINAL CAPACITY	CAPACITÉ NOMINALE	2800mAh (at 1000mA, +23°C, 0.8V cut off)
NOMINAL CURRENT	COURANT NOMINAL	100mA
MAXIMUM CONTINUOUS DISCHARGE CURRENT		2500mA
COURANT DE DÉCHARGE CONTINU MAXIMUM		
MAXIMUM PULSE CURRENT	COURANT PULSE MAXI	3000mA (10 seconds pulse / 50 sec rest)
OPERATING TEMPERATURE RANGE	PLAGE DE TEMPÉRATURE	-30°C / +60°C
STORAGE TEMPERATURE RANGE	PLAGE DE TEMPÉRATURE DE STOCKAGE	30°C max
LITHIUM CONTENT	POIDS DU LITHIUM	0.98gr
PROTECTION	PTC	Yes / Oui - PTC
WEIGHT	POIDS	15gr

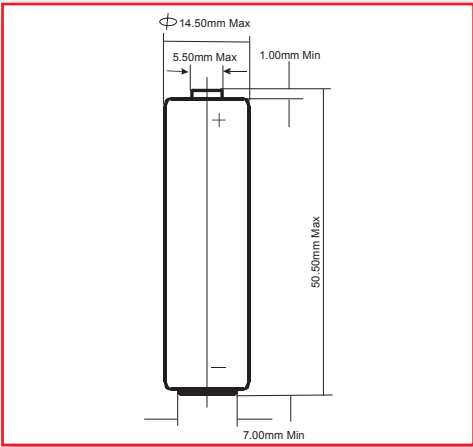

OUTLINE SAFETY WARNING: USE ONLY WITH IN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc, that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.

DISCHARGE CURVES / COURBES DE DÉCHARGE

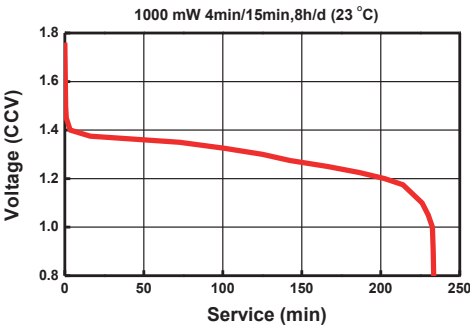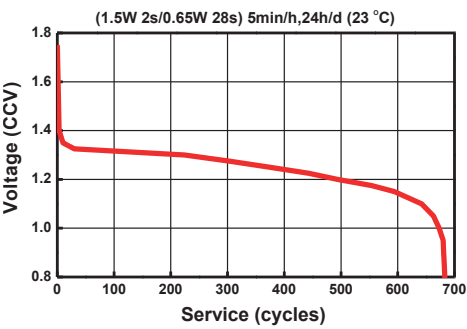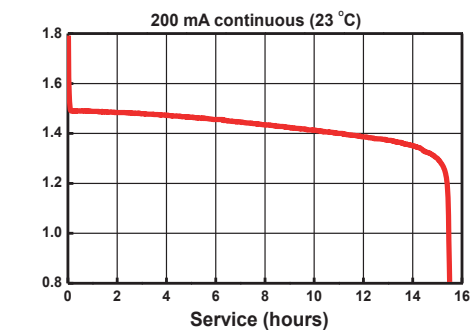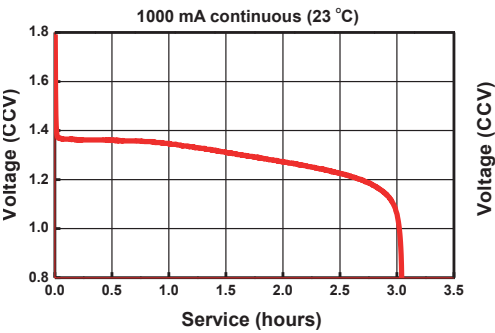

OUTLINE SAFETY WARNING: USE ONLY WITH IN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc, that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.