



## 1.Features

Ultra- low power consumption: Standby current less than 30mA Transmit format: WG26/WG34

Fast Searching speed : Time is less than 0.1S between reading card and opening the door 2.Specifications

Card Type: EM/MF	Waterproof Degree: IP68	
Operating Voltage: DC9-12V	Standby Current: ≤30mA	
Reading Distance: 2-5cm	Operating Humidity: -45~60°C	
Operating Humidity: 10%-90%RH	Searching Speed: Less than 0.1S between	


## R Ca d Reade

## 3.Wiring

Wire No.	Function	Color	Description
1	LED	Blue	Connect controller LED
2	Beeper	Yellow	Connect controller beeper
3	D0	Green	WG output line D0
4	Dl	White	WG output line Dl
5	+12V	Red	Power supply +12V
6	GND	Black	Power supply -12V
7	WG34	Grey	Grey wire connects GND to transimit Wiegand34 output format

reading card and opening the door

## 4.Wiring Diagram

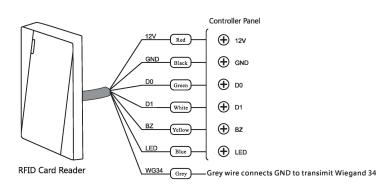

★Warm Tips:

Yourn (11)
Yourn (12)
Yourselves. Any issues, please notify supplier
Before installation, if you want to punch holes, please carefully check the black line or line pipe to avoid unnecessary
trouble such as breaking the black line when drilling. Use safety glasses when drilling or fixing the wire clips

\* If upgraded, please forgive us without notice

SERVIACOM PROACCESS - 4, allée des Sorbiers - Nancy Porte Sud - Site des Erables -54180 HEILLECOURT Tél. : 03.83.17.08.08 - Fax : 03.83.17.08.09 - HotLine : 0890 031 115 -Info@serviacom.fr - www.serviacom.fr

