

# DRAW WIRE SENSOR



## Series SX135 measurement range up to 8 m

### Key-Features:

- Measurement ranges 6, 7 and 8 m
- Analog Output: Potentiometer, 0...10 V, 4...20 mA
- Teachable outputs: 0...5 V, 0...10 V, with an additional Open-Collector switching output
- Incremental Output: RS422 (TTL), push-pull (HTL)
- Digital Output Absolute: CANopen, SSI, Profibus, EtherCAT, Profinet
- Linearity up to  $\pm 0.02$  % of full scale
- Protection class up to IP67
- Temperature range -20...+85 °C (optional -40 °C)
- High dynamics
- High interference immunity factor
- Customised versions available

### Content:

<b>Introduction</b>	....2
<b>Technical Data Analog</b>	....3
<b>Technical Data Incremental</b>	....4
<b>Technical Data Digital WCAN</b>	....5
<b>Technical Data Digital</b>	....6
<b>Technical Drawing</b>	....7
<b>Options</b>	....9
<b>Accessories</b>	..10
<b>Order Code</b>	..11


## INTRODUCTION

WayCon Positionsmesstechnik GmbH is a manufacturer of high quality draw wire position sensors for industrial use. Due to its small overall size, its short assembly time and its possible customisation, the SX sensor technology is a cost-effective and flexible solution for a wide range of industrial applications. The dynamics of the draw wire transducer allows a high motion speed and acceleration of the measuring target. Its rugged design and high quality makes applications in harsh industrial environments possible. Special instruments are available with mounting service of encoder on site, as well as customised versions of housing.


### Sensor principle:

The key component of a draw wire sensor is a highly flexible steel wire rope, that is wound single-layered on an ultra-light capstan. This capstan is connected to the sensor housing by a pre-stressed spring. The end of the steel wire rope, that is equipped with a rope clip gets connected to the target object. As soon as the distance between sensor and target object changes, the steel wire rope gets pulled out of the sensor and is rolled off the capstan (or vice versa). The shaft of the capstan is connected to a potentiometer (for analog output signals), or to an encoder (for digital output signals). If there is a rotation of the capstan due to a change in the distance to the target object, the sensor element will turn proportionally. This way the potentiometer, or the encoder converts a linear movement into a proportional electrical signal. If a standard analog output signal, like 0...10 V or 4...20 mA is needed, the sensor is equipped with additional electronics.

### SX50

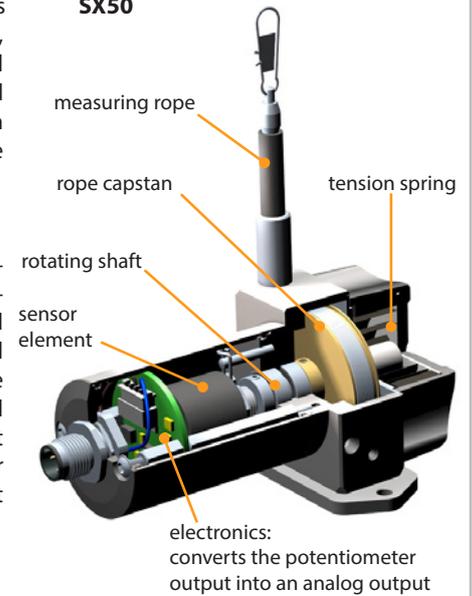

## OVERVIEW OF FEATURES

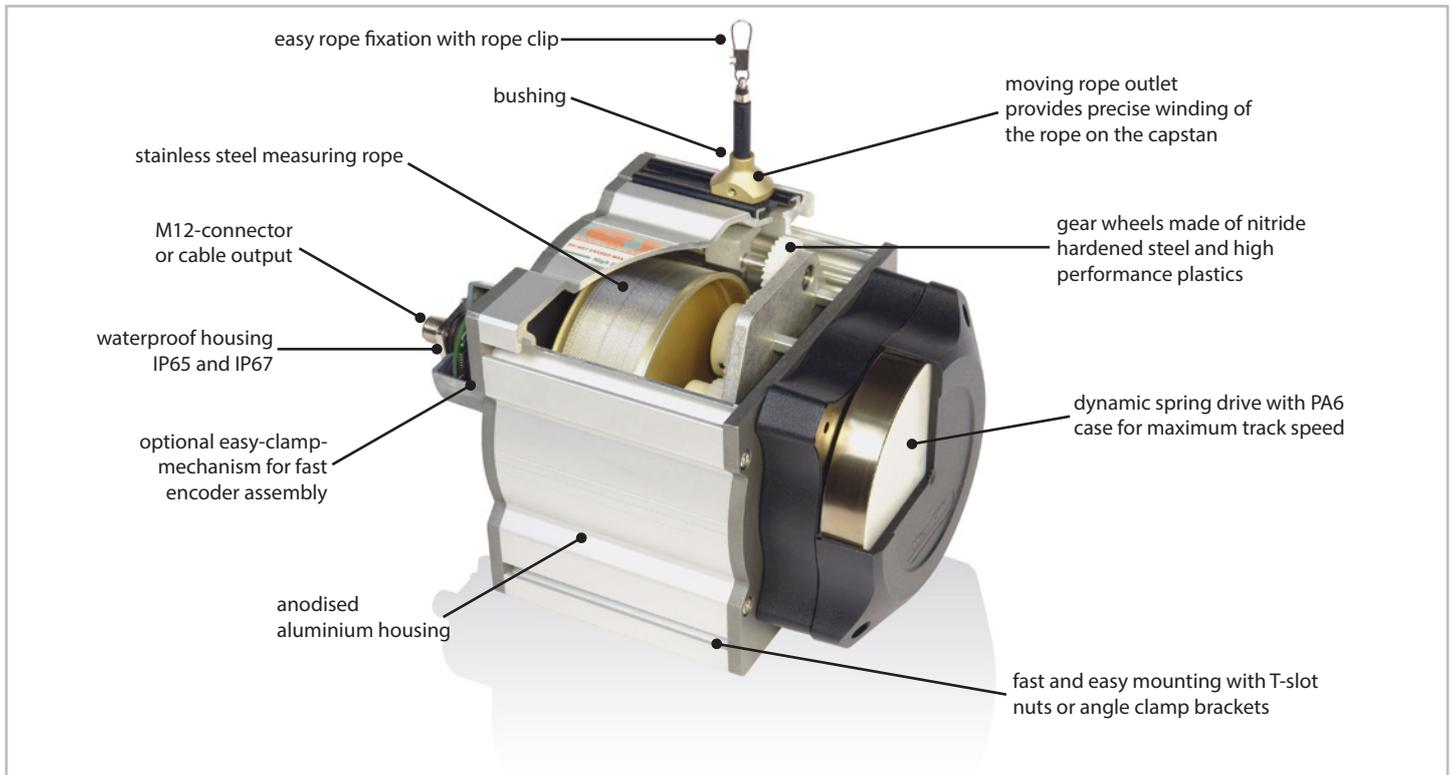

## WARNING NOTICES

- Don't let the rope snap back. If the rope is retracted freely, this may lead to injuries (whiplash effect) and the device may be damaged. Caution when unhooking and retracting the rope into the sensor.
- Never exceed the specified measurement range when extracting the rope!
- Do not try to open the device. The stored energy of the spring drive may lead to injuries when being mishandled.
- Do not touch the rope when operating the sensor.
- Avoid guiding the rope over edges or corners. Use a deflection pulley instead.
- Do not operate the sensor if the rope is buckled or damaged. A ripping of the rope may lead to injuries or a damaging of the sensor.

## TECHNICAL DATA ANALOG OUTPUT


Measurement range *	[m]	6	7	8
Linearity	[%]	±0.1		
Resolution		see output types below		
Sensor element		Hybrid Potentiometer		
Connection		connector output M12 or cable output axial (TPE cable, standard length 2 m)		
Protection class		IP65, optional IP67		
Humidity		maximum 90 % relative, no condensation		
Temperature		see output types below		
Mechanical data		extraction force, maximum velocity and maximum acceleration see <a href="#">„Mechanical Data“</a>		
Weight	[g]	approx. 1700, depending on the measurement range		
Housing		aluminium, anodised, spring case PA6		

\* other ranges on request

## ELECTRICAL DATA ANALOG OUTPUT

	Potentiometer 1 kΩ	Voltage 0...5 V, 0...10 V	Current 4...20 mA	Voltage 0...5 V, 0...10 V (teachable up to 50 % MR)
Output	1 kΩ	0...5 V, 0...10 V, galvanically isolated, 4 conductors	4...20 mA, 2 conductors	0...5 V, 0...10 V, 3 conductors
Power supply	max. 30 V	12...30 VDC		8...35 VDC
Recommended cursor current	< 1 μA	-		
Current consumption max.	-	22.5 mA (unloaded)	-	
Current consumption max.	-	-	-	150 mW
Output current	-	max. 10 mA, min. load 10 kΩ	max. 50 mA in case of error	max. 10 mA, min. load 1 kΩ
Dynamics	-	< 3 ms from 0...100 % and 100...0 %	< 1 ms from 0...100 % and 100...0 %	1 ms
Resolution	theoretically unlimited, limited by the noise			1 mV
Noise	dependent on the quality of the power supply	3 mV <sub>pp</sub> typical, max. 37 mV <sub>pp</sub>	0.03 mA <sub>pp</sub> = 6 mV <sub>pp</sub> at 200 Ω	3 mV <sub>pp</sub> typical, max. 37 mV <sub>pp</sub>
Inverse-polarity protection	-	yes, infinite		
Short-circuit proof	-	yes, permanent	-	yes, permanent
Working temperature	-20...+85 °C / optional: -40...+85 °C or -20...+120 °C	-20...+85 °C / optional: -40...+85 °C		
Temperature coefficient	± 0.0025 %/K	0.0037 %/K	0.0079 %/K	0.0016 %/K
Elektromagnetic compatibility (EMC)	-	according to EN 61326-1:2013		

Circuit


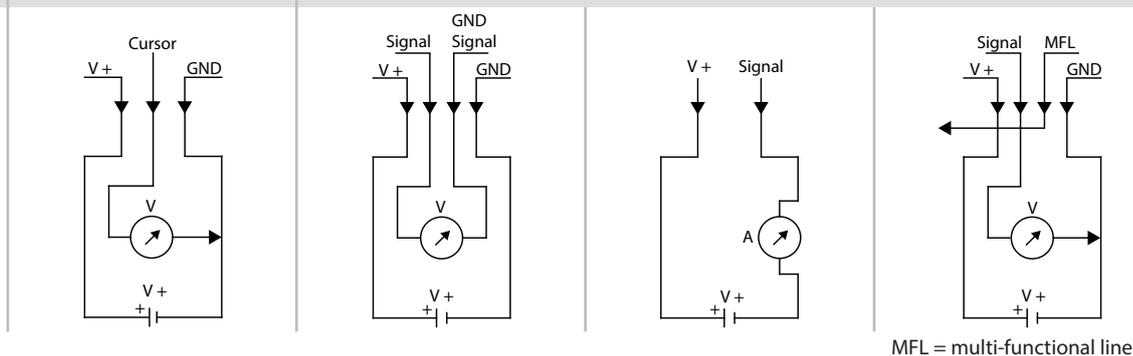


## TECHNICAL DATA DIGITAL OUTPUT INCREMENTAL

Measurement range *	[m]	6	7	8
Linearity	[%]	±0.05 (independent of the measurement range)		
Improved linearity (optional)	[%]	±0.02 (independent of the measurement range, only in combination with resolution 5.6 pulses/mm, or higher)		
Selectable resolution	[Pulses/mm]	0.28 / 2.8 / 5.6 / 14 (the resolution can be raised by the factor 4 using quadruple edge detection)		
Z-Pulse distance	[mm]	357.14		
Sensor element		Incremental-Encoder with optical code disk		
Output signal		A, B and Z pulse (plus inverted pulses /A, /B and /Z)		
Connection		connector output M12 or M23 or radial cable output (PVC, standard length 2 m)		
Protection class		IP65, optional IP67		
Humidity		maximum 90 % relative, no condensation		
Temperature range	[°C]	-20...+85		
Mechanical data		extraction force, maximum velocity and maximum acceleration see „ <a href="#">Mechanical Data</a> “		
Weight	[g]	approx. 1700, depending on the measurement range		
Housing		aluminium, anodised, spring case PA6		

\* others on request

## ELECTRICAL DATA DIGITAL OUTPUT INCREMENTAL

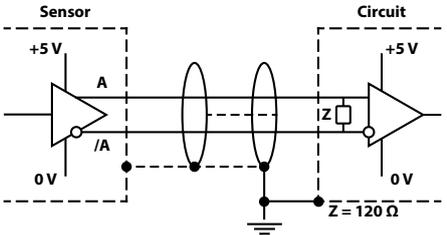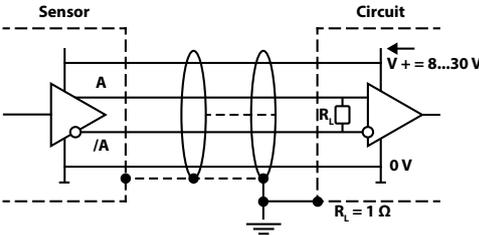
		Line driver L RS422 (TTL-compatible)	Push Pull G (HTL)
Power supply	[VDC]	5, ±5 %	8...30
Current consumption (no load)	[mA]	typical 40, max. 90	typical 40, max. 100
Load / Channel	[mA]	max. ±20	max. ±40
Pulse frequency	[kHz]	max. 300	max. 200
Signal level high	[V]	min. 2.5	min. V+ - 3
Signal level low	[V]	max. 0.5	
Recommended circuit			

## OUTPUT SIGNAL DIGITAL OUTPUT INCREMENTAL

### Output signal

Pulses A and B are 90° phase-delayed (detection of direction). The Z-Pulse is emitted once per turn. The Z-Pulse distance is 357.14 mm (= circumference of the rope drum) and can be used as a reference mark.

(The diagram shows the signal without inverted signals; time line for return of rope.)

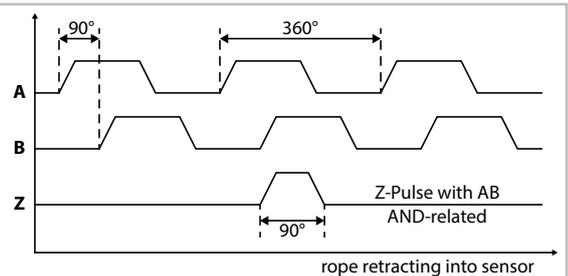

## TECHNICAL DATA DIGITAL OUTPUT ABSOLUTE CANopen (WCAN)

Measurement range	[m]	6	7	8
Linearity	[%]	±0.1		
Resolution		0.002 % of the measurement range		
Sensor element		Potentiometer		
Connection		connector output M12, 5 pins, axial (WCAN) or connector output M12, 8 pins, axial (WCANP)		
Protection class		IP65, optional IP67		
Humidity		maximum 90 % relative, no condensation		
Temperature		see „electrical data“ below		
Mechanical data		extraction force, maximum velocity and maximum acceleration see „ <a href="#">Mechanical Data</a> “		
Weight	[g]	approx. 1700, depending on the measurement range		
Housing		aluminium, anodised, spring case PA6		

## ELECTRICAL DATA DIGITAL OUTPUT ABSOLUTE CANopen (WCAN)

CAN specification		Full CAN 2.0B (ISO11898)
Communication profile		CANopen CIA 301 V 4.2.0
Device profile		Encoder, absolute linear; CIA 406 V 3.2.0
Error control		Producer Heartbeat, Emergency Message, Node Guarding
Node ID		Default: 7, configurable via SDO and Squeezer (offline configuration) *
PDO		1 x TPDO, static mapping
PDO Modes		Event-triggered, Time-triggered, Sync-cyclic, Sync-acyclic
Transmission rate		1 Mbps, 800, 500, 250, 125, 50, 20 kbps configurable via SDO and Squeezer (offline configuration) *
Bus connection		M12 connector, 5 pins
Integrated Bus termination resistor		120 Ω, connectible via SDO and Squeezer (offline configuration) *
Bus, galvanic separation		No
Power supply	[VDC]	8...30
Current consumption		10 mA typical at 24 V, 20 mA typical at 12 V
Measurement rate		1 kHz with 16-bit resolution
Repeatability	[%]	±0.15 or ±0.1 (according to the selected linearity)
Electrical protection		inverse polarity protection
Working temperature	[°C]	Standard: -20...+85 / optional: -40...+85
Temperature coefficient	[%/K]	0.0014
EMV		DIN EN61326-1:2013, conformity with directive 2014/30/EU

\* Offline configuration via Squeezer only in combination with M12 connector 8 pins.  
For more information on the offline configuration please refer to the CANopen [manual](#).  
For dimensions see technical drawing of analog output on page 7.

## TECHNICAL DATA DIGITAL OUTPUT ABSOLUTE

		SSI	CANopen	Profibus-DP	EtherCAT	Profinet
Measurement range	[m]	6 / 7 / 8				
Linearity	[%]	±0.05 (independent of the measurement range)				
Resolution scalable (with Software)		no	yes			
Standard resolution	[Pulses/mm] [Bit]	22.94 12	22.94 13			
Maximum resolution	[Pulses/mm] [Bit]	- -	183.5 16			
Sensor element		Multiturn-Absolute-Encoder with optical code disk				
Connection		see order code				
Power supply	[VDC]	10...30 (reverse polarity protection of the power supply)				
Current consumption (no load, at 24 VDC)	[mA]	max. 50	max. 100	max. 120	max. 200	
Protection class		IP65, optional IP67				
Humidity		max. 90 % relative, no condensation				
Temperature	[°C]	-20...+80				
Mechanical data		extraction force, maximum velocity and maximum acceleration see „ <a href="#">Mechanical Data</a> “				
Weight	[g]	approx. 1600				
Housing		aluminium, anodised, spring case PA6				
Special cables needed		yes				

## ELECTRICAL DATA DIGITAL OUTPUT ABSOLUTE

### Parameters of the SSI interface

Code	Gray
Output driver	RS485 Transceiver-Typ
Permissible load / channel	max. ±20 mA
Signal level	HIGH: typ 3.8 V LOW: with $I_{last} = 20$ mA typ 1.3 V
Resolution	12 bit
SSI clock rate	ST-resolution: 50 kHz...2 MHz
Monoflop time	≤ 15 µs
Data refresh rate	≤ 1 µs
Status and Parity bit	on request

### Parameters of the Profibus DP interface

Code	Binary
Interface	Profibus DP 2.0 Standard (DIN 19245 Part 3), RS485 Driver galvanically isolated
Protocol	Profibus Encoder Profile V1.1 Class1 and Class2 with manufacturer-specific add-ons
Baud rate	maximum 12 Mbit/s
Device address	1...127 (set by rotary switches)
Termination switchable	set by DIP switches
SET Button (Option)	Zero or defined value option
LED	LED is ON with the following fault conditions: Sensor error, Profibus error

### Parameters of the Profinet interface

Code	Binary
Protocol	PROFINET 10
LED Link1/Link2	green = active link / yellow = data transfer
Ezturn Software for Profinet (supplied with the encoder)	<ul style="list-style-type: none"> <li>Monitoring of cyclic data (e.g. position, speed)</li> <li>Monitoring of acyclic data (e.g. IMO, electronic name plate, encoder parameters, warnings and error messages, preset)</li> <li>Setting of preset values</li> <li>Firmware updates via the bus</li> </ul>

### Parameters of the CANopen interface (CAN)

Code	Binary
Interface	CAN High-Speed acc. to ISO 11898, Basic- and Full-CAN, CAN Specification 2.0 B
Protocol	CANopen profile DS406 V3.2 with manufacturer-specific add-ons
Baud rate	10 ... 1000 kbit/s (can be set via DIP switches/ Software configurable)
Node address	1...127 (can be set via rotary switches/ Software configurable)
Termination	can be set via DIP switches/ Software configurable
SET Button (Option)	Zero or defined value option
LED	LED is ON with the following fault conditions: Sensor error (internal code or LED error) too low voltage, over-temperature

### Parameters of the EtherCAT interface


Code	Binary
Protocol	EtherNet / EtherCAT
Modes	Freerun, Distributed Clock
Diagnostic LED red	LED is ON with the following fault conditions: Sensor error (internal code or LED error), low voltage, over-temperature
Run LED green	LED is ON with the following conditions: Preop-, Safeop and Op-State (EtherCAT Status machine)
2 x Link LEDs yellow	LED is ON with the following conditions (Port IN and Port OUT): Link detected

## MECHANICAL DATA


Measurement range [m]	Extraction force $F_{min}$ [N]	Extraction force $F_{max}$ [N]	Velocity $V_{max}$ [m/s] *	Acceleration $a_{max}$ [m/s <sup>2</sup> ] *
6	7.8	13.6	10	140
7	8.2	15	10	140
8	8.2	15.2	10	140

\* reduced to 80 % when option IP67 is used

## TECHNICAL DRAWING ANALOG OUTPUT AND DIGITAL OUTPUT WCAN

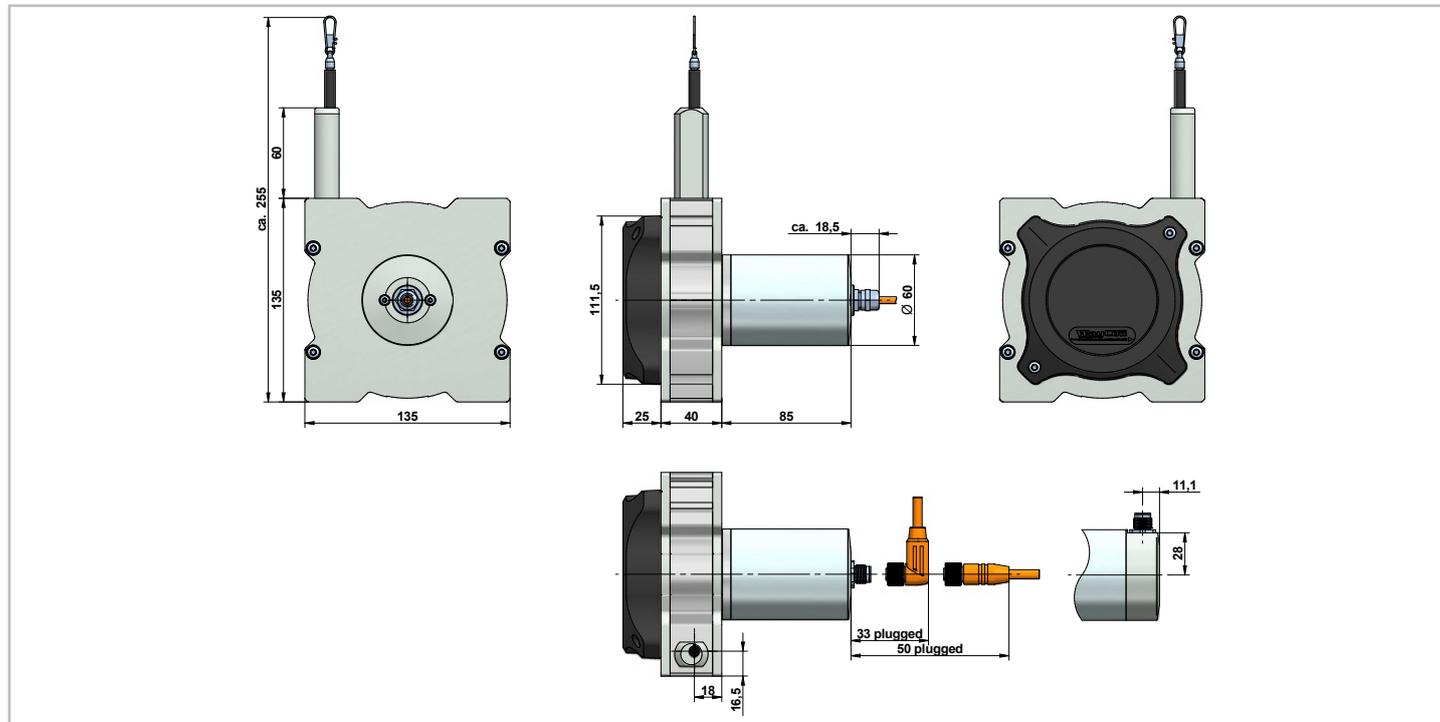


## TECHNICAL DRAWING DIGITAL OUTPUT INCREMENTAL

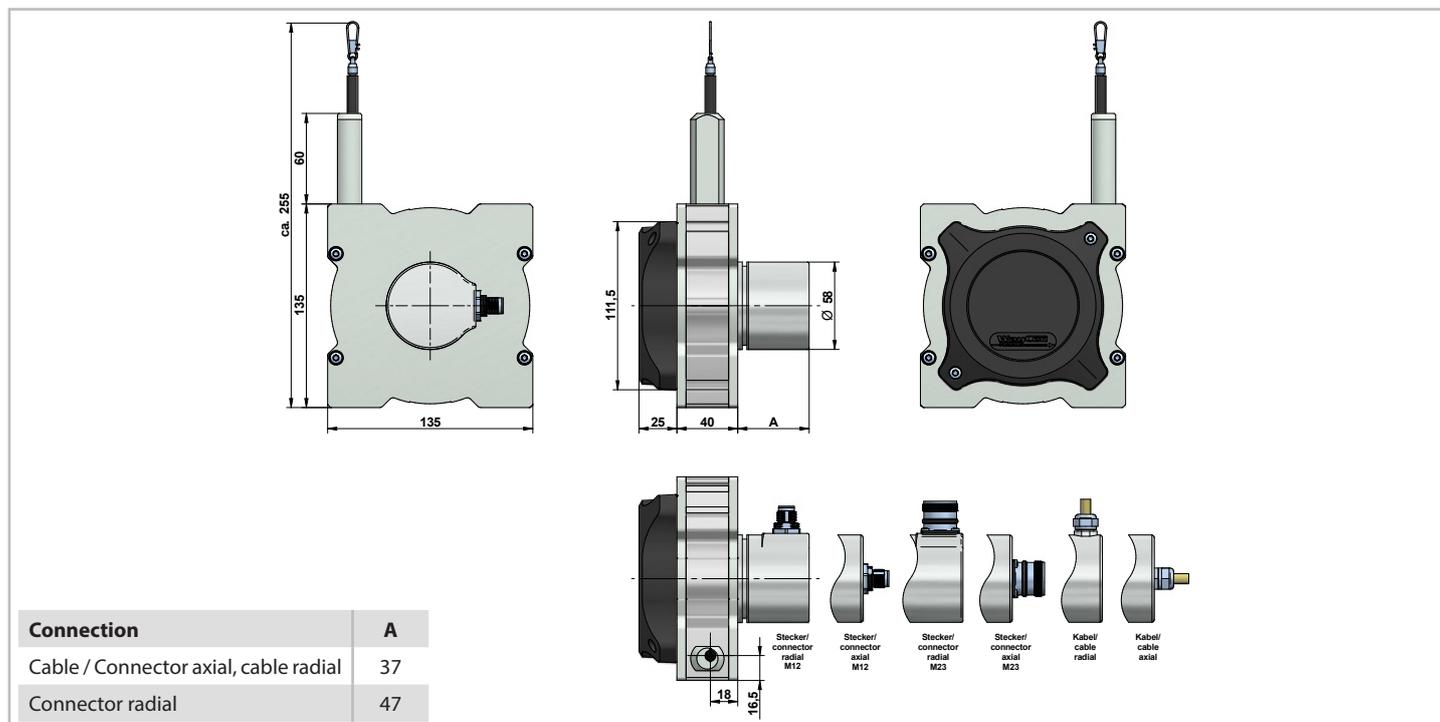

Connection	A
Cable / Connector axial, cable radial	37
Connector radial	47

## TECHNICAL DRAWING DIGITAL OUTPUT ABSOLUTE

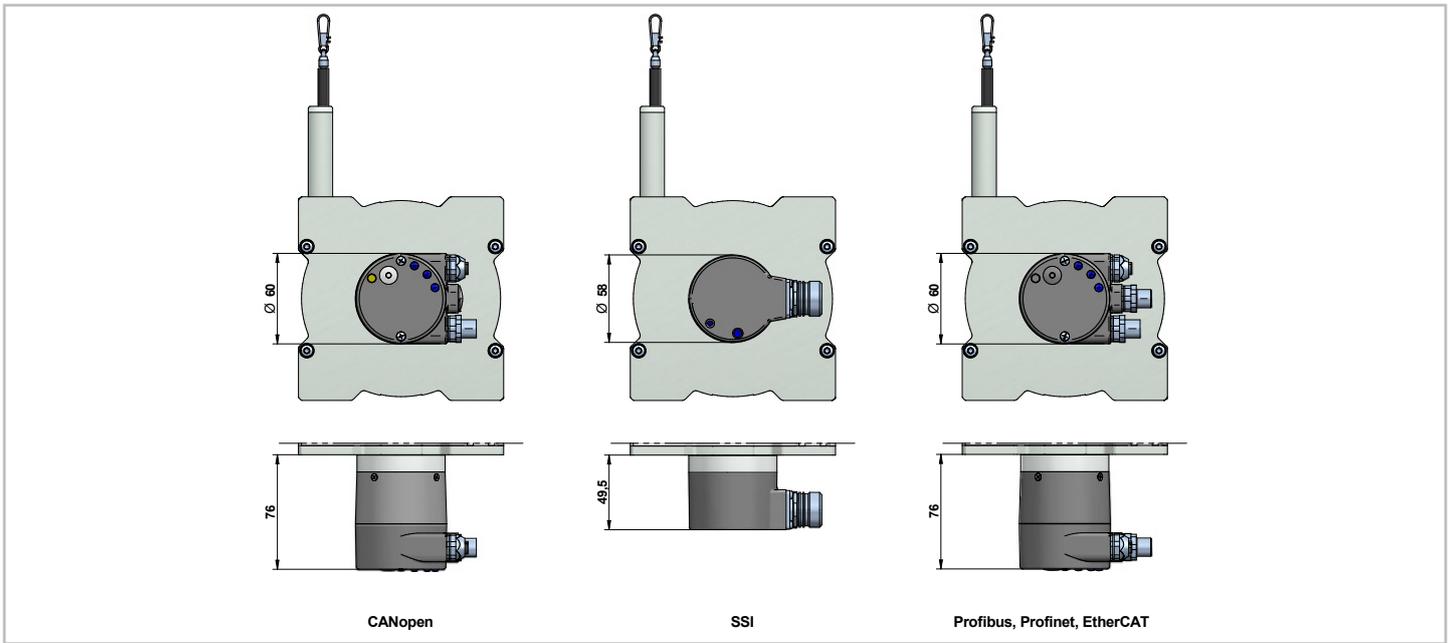


## TECHNICAL DRAWING MOUNTING OPTIONS

### 1. by using the grooves in the sensor housing

The included slot nuts can be easily inserted into the grooves of the sensor housing. The slot nuts have a metric M6 thread.


Two slot nuts are delivered with each sensor.



### 2. by angle clamp brackets


The angle clamp brackets feature a bore for M6 screws to fix it on a plate / slab or a profile.

Two brackets are delivered with each sensor.

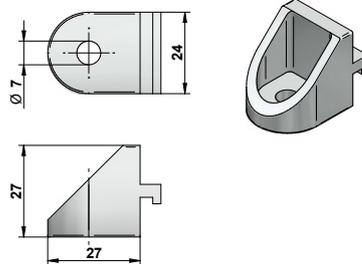


### Note:


The grooves of the sensor housing, the slot nuts and brackets are compatible to the aluminium building kit system from *item Industrietechnik GmbH*.

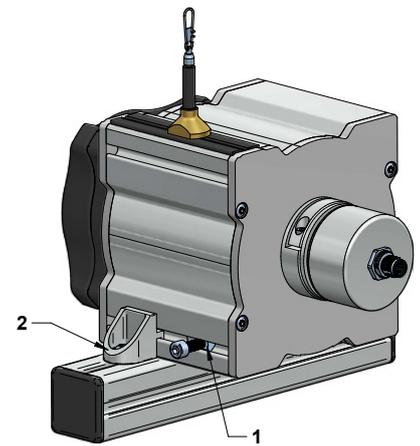

### Position of the grooves

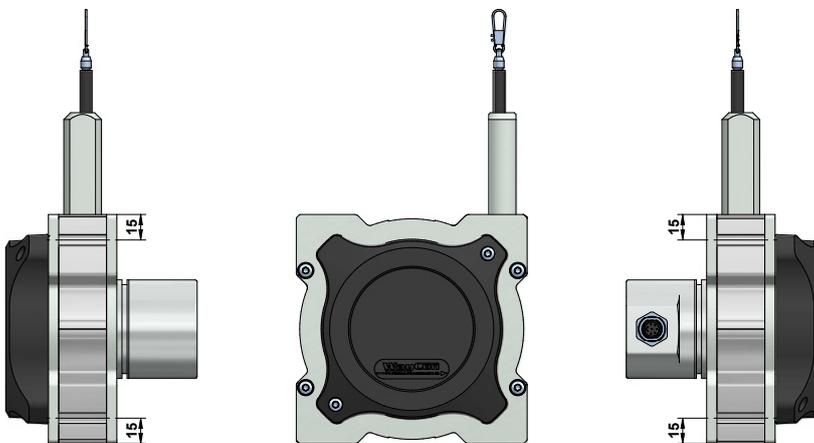





### Mounting by using brackets

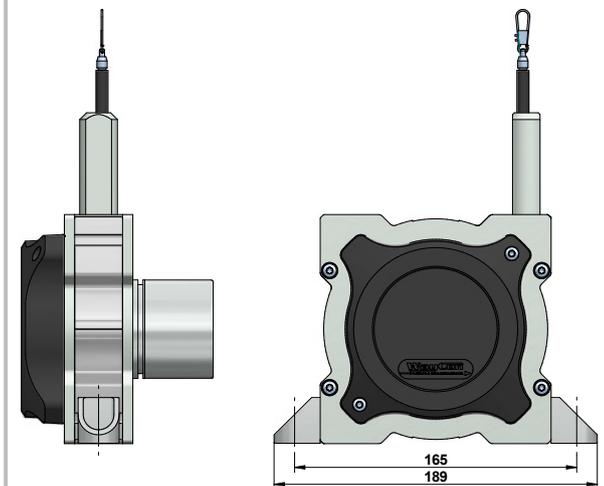

## OPTIONS

The following table gives an overview of frequently used options, with which the standard sensors can be equipped. Please pay attention that not all options can be combined. Information on possible combinations can be found in the order codes.

Option	Order code	Description
Changed cable or connector orientation (NOT with analog output)	K1, K2, K3	Rope outlet points upwards: Standard: sideways, opposite to the rope outlet K1: at the top K2: sideways, same side as the rope outlet K3: at the bottom
Improved linearity	L02	Improved linearity 0.02 %
Inverted output signal (analog output only)	IN	The analog signal of the sensor is increasing by extracting the rope (standard). Option IN inverts the signal, i.e. the signal of the sensor declines by extracting the rope.
Synthetic wire rope (instead of stainless steel wire rope)	COR	Synthetic wire rope, made out of abrasion resistant and enhanced Coramid.
Rope fixation by M4 thread	M4	Optional, pivoted rope fixation with screw thread M4, length 22 mm. Ideal for attachment to through holes or thread holes M4.
Rope fixation by eyelet	RI	The end of the wire rope is equipped with a eyelet instead of a rope clip. Inside diameter 20 mm
Protection class IP67	IP67	Use option IP67, if the sensor will operate in a humid environment. Note that with this option there may occur a light hysteresis in the output signal due to the special sealing. The max. acceleration and displacement speed are reduced to 80 % of the specified value.
Corrosion protection	CP	Includes a V4A wire rope, stainless steel bearings and option M4. The sensors rope drum gets HARTCOAT® coated. This coating is a hard-anodic oxidation that protects the sensor from corrosion by aggressive media (e. g. sea water) with a hard ceramics-like layer.
Increased corrosion protection (analog output only)	ICP	Components of the housing and the rope drum get HARTCOAT® coated. Includes the options CP, IP67 and M4.
Increased temperature range High (potentiometer 1R only)	T120	Sensors with potentiometer output (1R) and cable output can be operated from -20 to +120 °C when this option is used. (NOT in combination with voltage-, current- or digital output signals)
Increased temperature range Low (analog output only)	T40	Special components and a low temperature grease make a working temperature down to -40 °C (up to +85 °C) possible.

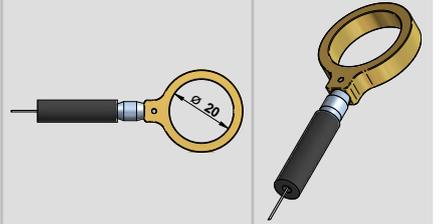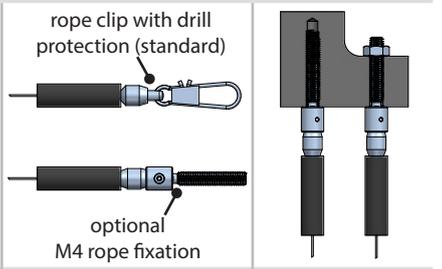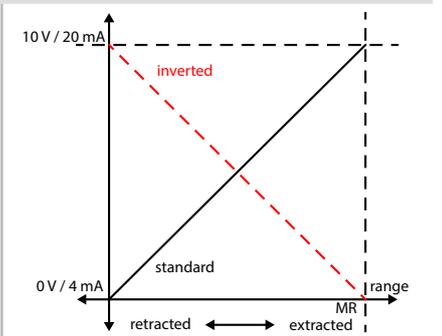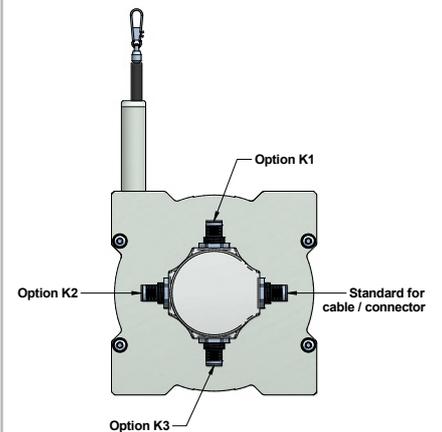


## ACCESSORY SQUEEZER FOR TEACHABLE OUTPUTS 5VT AND 10VT

Draw wire sensors with the analogue output versions 5VT and 10VT are equipped with teachable, internal electronics, called VT-Electronics. The signals provided by the sensor's potentiometer are digitized by the VT-Electronics. This digital information is first processed by the electronics, then transformed back and given out as an analogue output signal 0 to 5 V or 0 to 10 V.

The digitization offers two possibilities of adjustment, by which the sensor can be configured individually using the Squeezer:


1. Teaching of the measurement range. After a successful teaching process, the squeezer can be pulled off the sensor and be replaced by a standard cable or connector.
2. Setting an individual switching point. The squeezer allows the setting of an individual switching point open collector. The switching signal is emitted through the multi-functional line MFL.

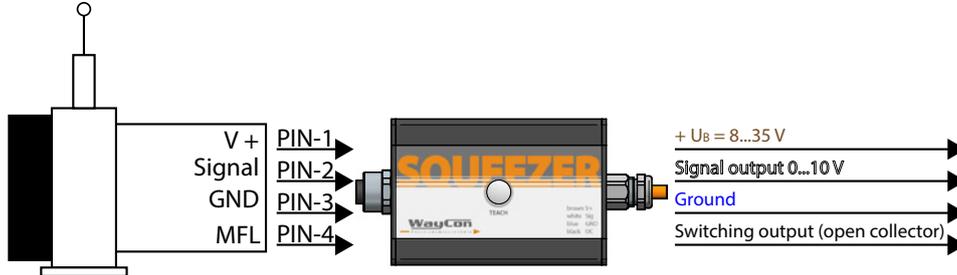

A detailed description of the functions can be found in a separate [manual](#).

### Electrical connection Squeezer

Accessory:  
Connection cable sensor to  
Squeezer:  
K4P1,5M-SB-M12

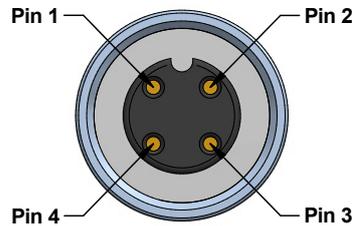

Connector (to sensor)		Cable ends (to PLC)	
PIN 1	V +	BN	V +
PIN 2	Signal	WH	Signal
PIN 3	GND	BU	GND
PIN 4	MFL*	BK	NPN*


MFL = multi-functional line  
\* The open collector is a NPN switching output

## GENERAL ACCESSORIES

### Deflection pulley - UR2

The rope must be extracted from the sensor vertically. The maximum variation from the vertical is 3°. A deflection pulley allows a change in the direction of the wire rope. Several pulleys may be used. The rope clip must not be guided over the deflection pulley.

Material foot: anodised aluminium  
Material rope wheel: POM-C  
Mounting: by 2 hexagon socket or countersunk screws M6, vertical or horizontal mounting possible. Ball bearings: with special low temperature grease and RS-sealing.  
Temperature: -40...+80 °C

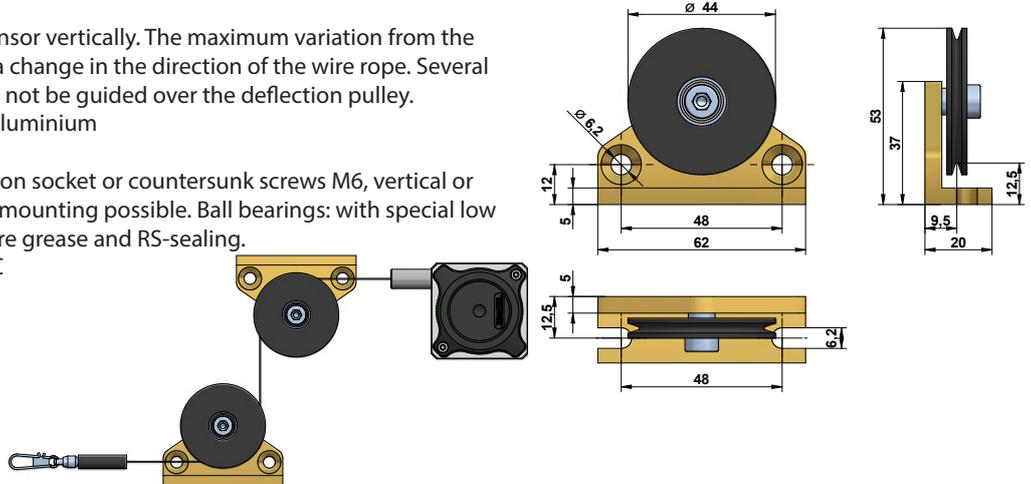


### Rope extension - SV

For bridging a greater distance between the measuring target and the sensor a rope extension can be applied. The rope clip must not be guided over the deflection pulley.


Please specify the length needed in your order (XXXX). The minimum length is 150 mm:

- SV1-XXXX: rope extension (150...4995 mm)
- SV2-XXXX: rope extension (5000...19995 mm)
- SV3-XXXX: rope extension (20000...40000 mm)




### Magnetic clamp - MGG1

Use the magnetic clamp to quickly attach the rope to metallic objects without any assembly time. A rubber coating provides gentle contact (e. g. on varnished surfaces) and prevents from slipping due to vibration. The magnet consists of a neodym core for an increased adhesive force of 260 N. The hook makes it easy to attach the rope clip.

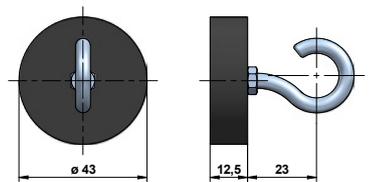

## ORDER CODE ANALOG OUTPUT

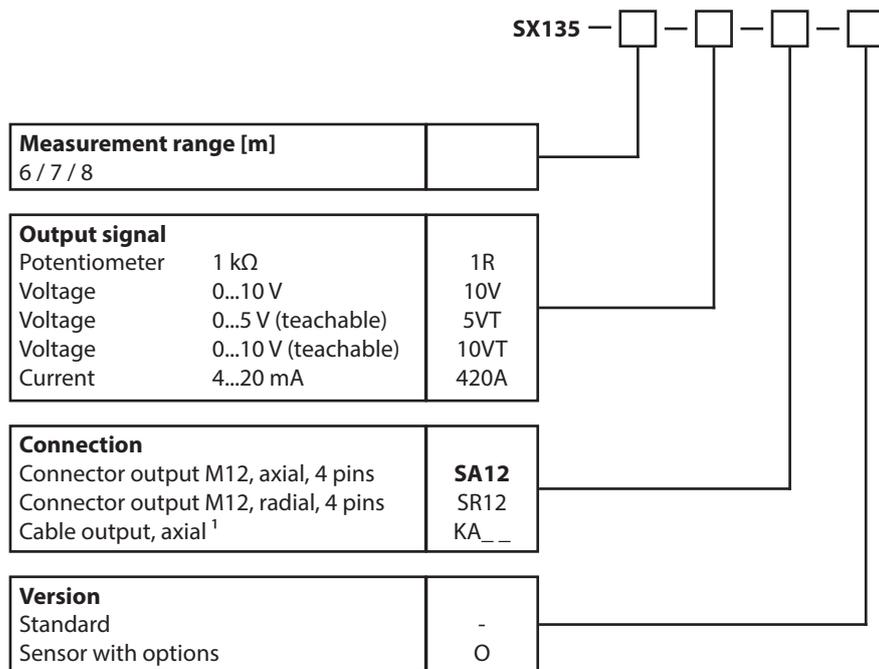

<b>Measurement range [m]</b> 6 / 7 / 8	
---	--

<b>Output signal</b>		
Potentiometer	1 kΩ	1R
Voltage	0...10 V	10V
Voltage	0...5 V (teachable)	5VT
Voltage	0...10 V (teachable)	10VT
Current	4...20 mA	420A

<b>Connection</b>		
Connector output M12, axial, 4 pins	<b>SA12</b>	
Connector output M12, radial, 4 pins	SR12	
Cable output, axial <sup>1</sup>	KA__	

<b>Version</b>		
Standard	-	
Sensor with options	O	

Option	Description
IN	inverted output signal
COR	synthetic wire rope (Coramid)
M4	rope fixation M4 thread
RI	rope fixation eyelet
IP67	protection class IP67
CP	corrosion protection
ICP	increased corrosion protection
T120	increased temperature -20...+120 °C
T40	increased temperature -40...+85 °C


Option	not combinable with
COR	measurement range 7 / 8, T120
M4	CP, ICP
RI	CP, ICP
IP67	T120, ICP
CP	M4, RI, T120
ICP	M4, RI, IP67, T120
T120	10V, 5VT, 10VT, 420A, SA12, SR12, COR, IP67, CP, ICP

<sup>1</sup> Length in m (min. 2 m)

Examples: **KA02** = 2 m, KA05 = 5 m

**Bold text:** standard with shorter lead time

## ORDER CODE DIGITAL OUTPUT INCREMENTAL

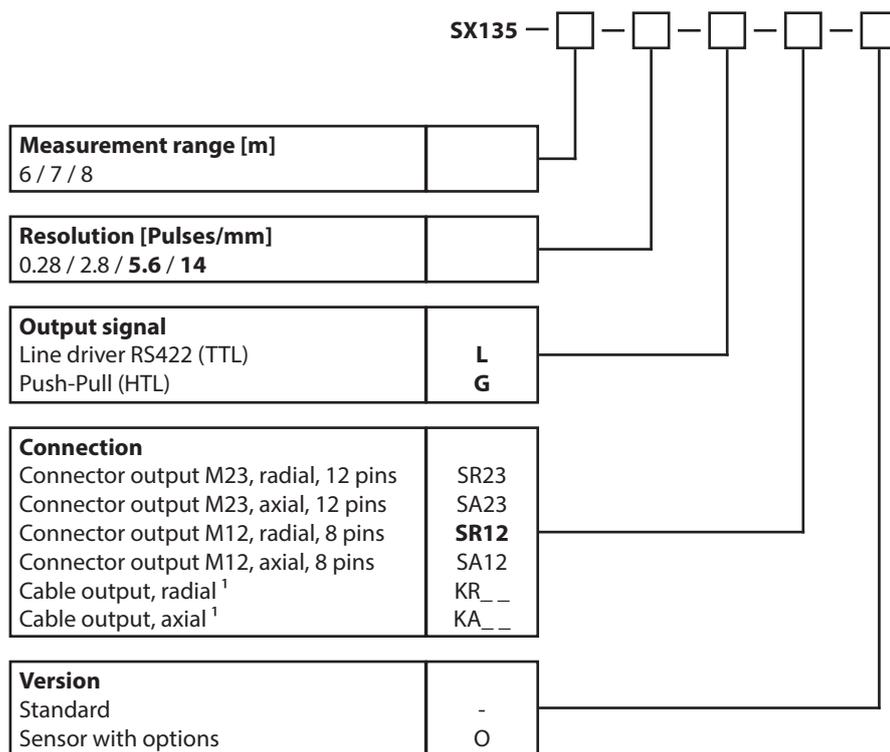

<b>Measurement range [m]</b> 6 / 7 / 8	
---	--

<b>Resolution [Pulses/mm]</b> 0.28 / 2.8 / <b>5.6</b> / 14	
---	--

<b>Output signal</b>		
Line driver RS422 (TTL)	<b>L</b>	
Push-Pull (HTL)	<b>G</b>	

<b>Connection</b>		
Connector output M23, radial, 12 pins	SR23	
Connector output M23, axial, 12 pins	SA23	
Connector output M12, radial, 8 pins	<b>SR12</b>	
Connector output M12, axial, 8 pins	SA12	
Cable output, radial <sup>1</sup>	KR__	
Cable output, axial <sup>1</sup>	KA__	

<b>Version</b>		
Standard	-	
Sensor with options	O	

Option	Description
K1	cable/connector orientation top
K2	cable/connector orientation left
K3	cable/connector orientation bottom
L02	improved linearity ±0.02 %
COR	synthetic wire rope (Coramid)
M4	rope fixation M4 thread
RI	rope fixation eyelet
IP67	protection class IP67
CP	corrosion protection


Option	not combinable with
L02	resolution 0.28 / 2.8
COR	measurement range 7 / 8
M4	CP
RI	CP
CP	M4, RI

<sup>1</sup> Length in m (min. 2 m)

Examples: **KR02** = 2 m, KR05 = 5 m

**Bold text:** standard with shorter lead time

## ORDER CODE DIGITAL OUTPUT ABSOLUTE CANopen (WCAN)

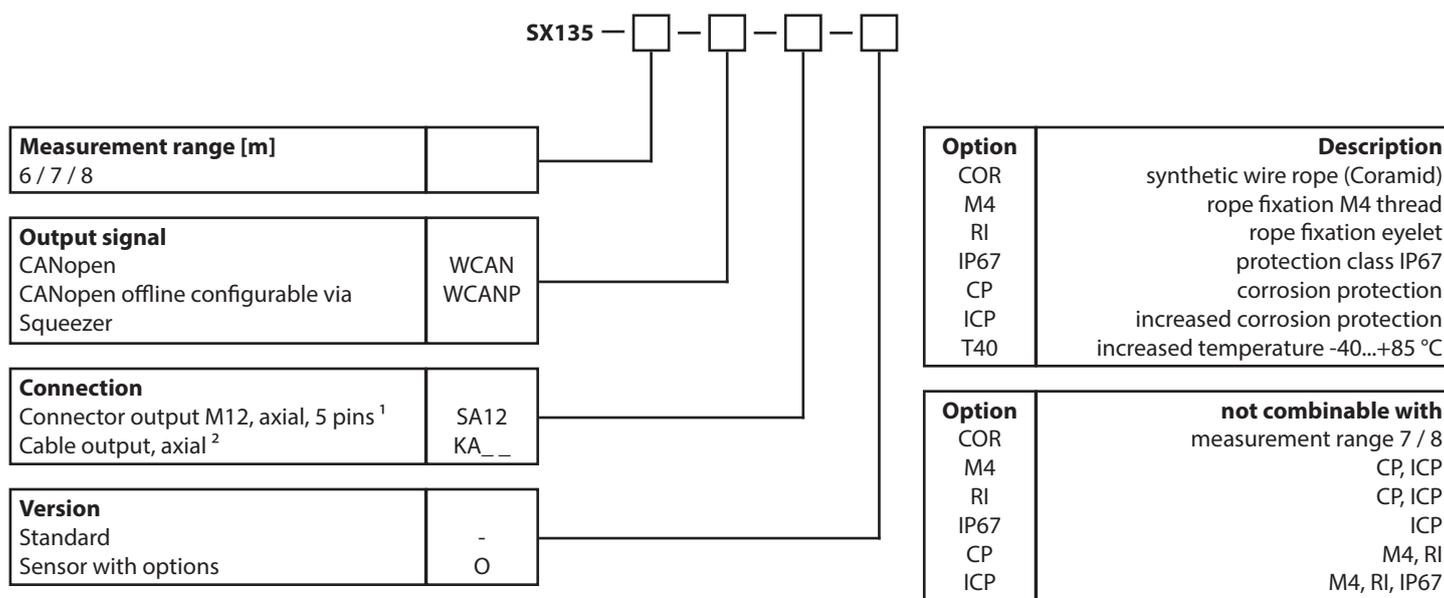


<sup>1</sup> 8 pins in combination with WCANP

<sup>2</sup> Length in m (Minimum 2 m)

Examples: KA02 = 2 m, KA05 = 5 m

## ORDER CODE DIGITAL OUTPUT ABSOLUTE

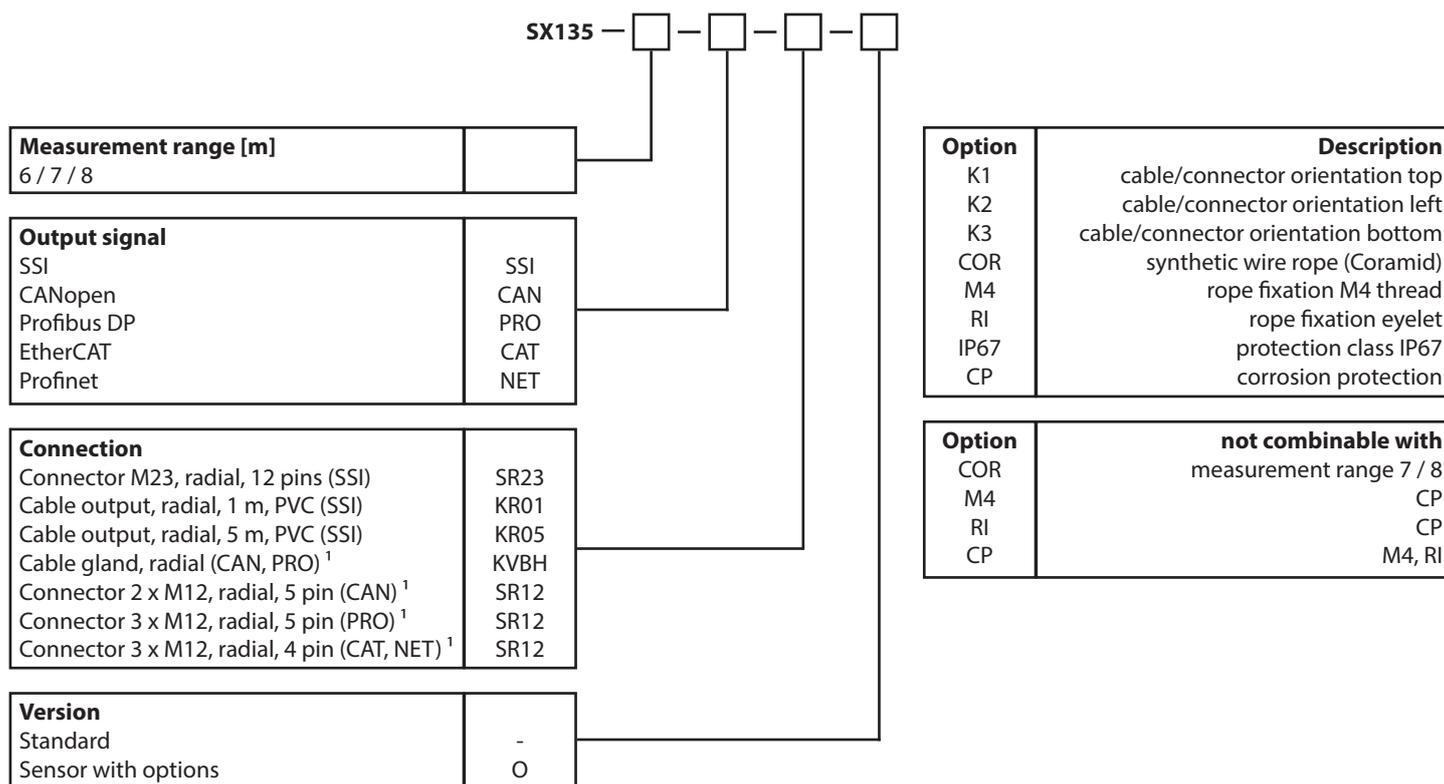

<sup>1</sup> removable bus terminal cover

## GENERAL ACCESSORIES

SQUEEZER2M	accessory for VT or WCANP output, 2 m cable
SQUEEZER5M	accessory for VT or WCANP output, 5 m cable
SQUEEZER10M	accsy for VT or WCANP output, 10 m cable
UR2	deflection pulley

MGG1	magnetic clamp
SV1-XXXX	rope extension (150 mm up to 4995 mm)
SV2-XXXX	rope extension (5000 mm up to 19995 mm)
SV3-XXXX	rope extension (20000 mm up to 40000 mm)

## ACCESSORIES ANALOG OUTPUT

<b>Cable with mating connector M12, 4 poles, shielded</b>	
K4P2M-S-M12	2 m, straight connector
K4P5M-S-M12	5 m, straight connector
K4P10M-S-M12	10 m, straight connector
K4P2M-SW-M12	2 m, angular connector
K4P5M-SW-M12	5 m, angular connector
K4P10M-SW-M12	10 m, angular connector

<b>Mating connector M12, 4 poles, shielded</b>	
D4-G-M12-S	straight, M12 for self assembly
D4-W-M12-S	angular, M12 for self assembly

<b>Connection cable sensor to Squeezer</b>	
K4P1,5M-SB-M12	1.5 m, 4-pole, shielded

## ACCESSORIES DIGITAL OUTPUT INCREMENTAL

<b>Cable with mating connector M12, 8 poles, shielded</b>	
K8P2M-S-M12	2 m, straight connector
K8P5M-S-M12	5 m, straight connector
K8P10M-S-M12	10 m, straight connector
K8P2M-SW-M12	2 m, angular connector
K8P5M-SW-M12	5 m, angular connector
K8P10M-SW-M12	10 m, angular connector

<b>Cable with mating connector M23, 12 poles, shielded</b>	
K8P2M-S-M23	2 m, straight connector
K8P5M-S-M23	5 m, straight connector
K8P10M-S-M23	10 m, straight connector

<b>Mating connector M12, 8 poles, shielded</b>	
D8-G-M12-S	straight, M12 for self assembly
D8-W-M12-S	angular, M12 for self assembly

<b>Mating connector M23, 12 poles, shielded</b>	
CON012-S	straight, M23 for self assembly, metal housing

## ACCESSORIES DIGITAL OUTPUT ABSOLUTE CANOpen (WCAN)

<b>Cable with mating connector M12, 5 poles, shielded</b>	
K5P2M-S-M12	2 m, straight connector
K5P2M-SW-M12	2 m, angular connector

<b>Connection cable sensor to Squeezer for WCANP</b>	
K48P03M-SB-M12	0.3 m, shielded, 8 poles to 4 poles

<b>Cable for WCANP with mating connector M12, 8 poles, shielded</b>	
K8P2M-S-M12	2 m, straight connector
K8P2M-SW-M12	2 m, angular connector

<b>Adapter cable WCANP to CAN-Bus</b>	
K58P03M-SB-M12	0.3 m, shielded, 8 poles to 5 poles

## ACCESSORIES DIGITAL OUTPUT ABSOLUTE SSI

<b>Cable with mating connector M23, 12 poles, shielded</b>	
K12P02M-S-M23-SSI	2 m, straight connector
K12P05M-S-M23-SSI	5 m, straight connector
K12P10M-S-M23-SSI	10 m, straight connector
K12P15M-S-M23-SSI	15 m, straight connector

<b>Mating connector M23, 12 poles, shielded</b>	
CON012-S	straight, M23 for self assembly, metal housing

## ACCESSORIES DIGITAL OUTPUT ABSOLUTE CANopen (CAN)

### Cable with mating connector M12, 5 poles, shielded

K5P2M-B-M12-CAN 2 m, plug female M12, open ends

K5P2M-SB-M12-CAN 2 m, connector male M12, plug female M12

K5P2M-S-M12-CAN 2 m, connector male M12, open ends

## ACCESSORIES DIGITAL OUTPUT ABSOLUTE PROFIBUS

### Cable with mating connector M12, 5 poles, shielded

K5P2M-B-M12-PROF 2 m, plug female M12, open ends

K5P2M-SB-M12-PROF 2 m, connector male M12, plug female M12

K5P2M-S-M12-PROF 2 m, connector male M12, open ends

### Other

M12-PROF-AW termination resistor

## ACCESSORIES DIGITAL OUTPUT ABSOLUTE EtherCAT AND PROFINET

### Cable with mating connector M12, 4 poles, shielded

K4P2M-S-M12-CAT 2 m, connector male M12, open ends

K4P5M-S-M12-CAT 5 m, connector male M12, open ends

K4P10M-S-M12-CAT 10 m, connector male M12, open ends

### Cable with mating connector M12, 4 poles, shielded

K4P2M-SS-M12-CAT 2 m, plug female M12, open ends

K4P5M-SS-M12-CAT 5 m, plug female M12, open ends

K4P10M-SS-M12-CAT 10 m, plug female M12, open ends

Please note, that an additional cable is required for the power supply. Appropriate cables can be chosen from the list of the [„Accessories Analog Output“](#).