


DONGLING TECHNOLOGIES Air Cooled Shaker



The air-cooled series electro-dynamic vibration test system has the advantages, such as wide frequency range, excellent indicators, high reliability, small floor space, easy to move, and easy to operate.


At present, this series has a variety of models of vibration generators to choose. The exciting force range is from 1kN to 70kN and maximum load is from 70 kg to 1000 kg. Also, the climate and mechanics environmental testing equipments are provided.

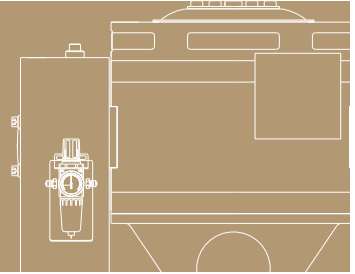

Performance characteristics

- Sinusoidal excitation force range: 1kN ~ 70kN
- Random to sinusoidal excitation force ratio 1:1
- Two-times-of-sine shock force (Three times optional)
- Displacement peak-to-peak value of 25mm, 40mm, 51mm, 76mm or 100mm
- Lightweight armature with optimization design and strong vibration-resistant performance, and with better vibration isolation effect of air spring at trunnion position
- Strong bearing capacity of air spring in central room, and good low-frequency performance
- Double magnetic circuit design, with low flux leakage and uniform magnetic field
- Sine, Random and Shock etc. test function
- Good cooling effect and low noise fan

Optional accessories:

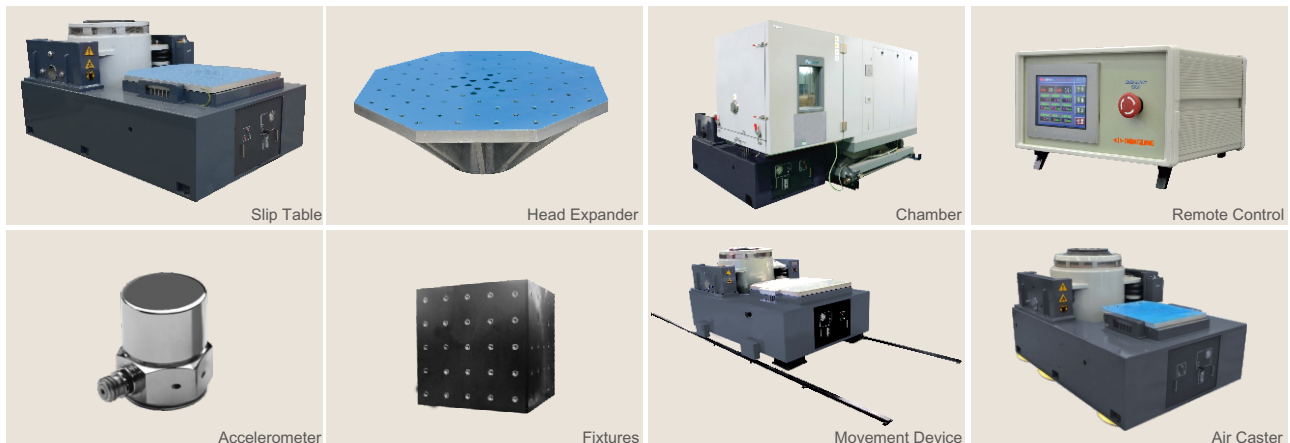

ES-60LS3-445 Air Cooled Shaker

ES-60LS3-445

System Performance	Metric	American
Rated Sine Force	60 kN	13200 lbf
Rated Random Force	60 kN	13200 lbf
Rated Shock Force	120/180* kN	26400/39600* lbf
Usable Frequency	DC-2700 Hz	DC-2700 Hz
Maximum Velocity	2/2.5* m/s	78.7/98.4* in/s
Maximum Acceleration	1000 m/s ²	100 g
Maximum Static Payload	800 kg	1760 lbs
Resonance Frequency	2300±5% Hz	2300±5% Hz
Maximum Displacement (p-p)	76 mm	3 in

Shaker: ET-60LS3-445

Mass of Moving Elements	55 kg	121 lbs
Armature Diameter	445 mm	17.5 in
Weight Uncrated	4500 kg	9921 lbs
Body Suspension Natural Frequency	<2.5 Hz	<2.5 Hz
Stray Flux Density	<10 Gauss	<10 Gauss
Dimension L×W×H	1700×1130×1264 mm	66.9×44.5×49.8 in

Power Amplifier: SDA-60

Power	60 kVA	60 kVA
Power Supply Requirement	95 kVA	95 kVA
Dimension L×W×H	620×1010×1960 mm	24.4×39.8×77.2 in
Weight Uncrated	700 kg	1543 lbs


Blower: B-7000

Power	22 kW	29.5 hp
Air Flow	1.6 m ³ /s	1600 l/s
Air Pressure	8 kPa	1.16 psi
Weight Uncrated	340 kg	750 lbs

Options

- Magnesium or Aluminum Armature
- Combo or Standalone Slip Table
- Motorized Shaker Body Rotation System
- Head Expanders and Vertical Support Platforms
- Thermal barrier
- Customized Fixtures (T, L, Cube)
- Pneumatic Isolators or Free Foundation Isolation Base
- Air Caster or Glide Rail
- Enclosed Air Inlet and Outlet Ducts
- Remote control

Outline Drawing

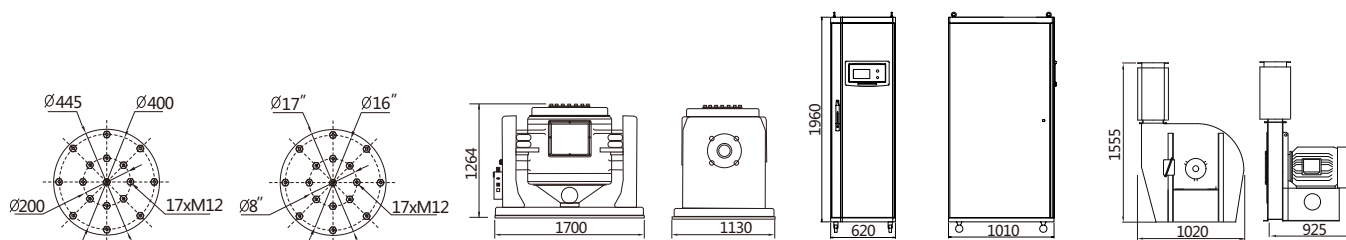

Shaker ET-60LS3-445

Power Amplifier SDA-60

Blower B-7000

NOTE: In keeping with our commitment to continuous product improvement, the information herein is subject to change.