




“LL”


**10 – 75 KW
12 – 100 Hp**

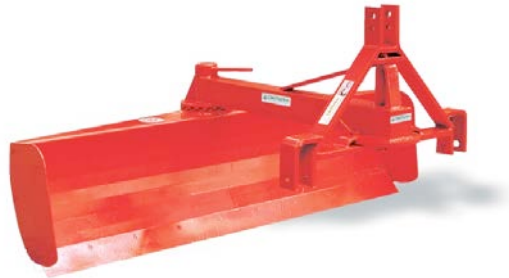

NORMALE
NORMAL
NORMALE
NORMALEN



POSIZIONE 1
POSITION 1
POSITION 1
POSITION 1



POSIZIONE 2
POSITION 2
POSITION 2
POSITION 2

Caratteristiche standard:

. Angolo lama regolabile.- Angolo Supporto regolabile.- Taglienti intercambiabili.- Parti laterali rimovibili.

Standard features:



. Blade angle adjustable. - Adjustable support angle.- Replaceable cutting edge.- Removable sides.

Caractéristiques standard:

. Angle de la lame réglable. - Soutien d'angle réglable. - Pointes remplaçables. - Côtés amovibles.

Standardausrustung:

Schildansatzwinkel einstellbar.- Trägerarmwinkel esinstellbar.- Scheuerleiste austauschbar.- Seitenbleche abmontierbar.

MOD.	HP					PRICE
		cm	Inch	kg	lbs	
SERIE MEDIA – MEDIUM SERIES – SERIE MOYENNE – MITTLERE SERIE						
LL 140	25-35	140	55	150	308	
LL 160	25-35	160	62	180	396	
LL 180	40-50	180	72	190	418	
LL 200	40-50	200	80	210	440	
LL 220	55-70	220	87	220	485	
LL 250	55-70	250	98	260	575	
LL 300	60-80	300	118	320	705	
SERIE PESANTE – HEAVY SERIES – SERIE LOURDE – SCHWERE SERIE						
LP 140	45-55	140	55	198	436	
LP 160	45-55	160	62	245	540	
LP 180	60-70	180	72	289	637	
LP 200	60-70	200	80	332	731	
LP 220	75-90	220	87	375	826	
LP 250	75-90	250	98	405	892	
LP 300	80-100	300	118	450	992	