

LITHIUM PRIMARY BATTERY



**ER34615M**  
**3.6V 14000mAh**  
 lithium-thionyl chloride batteries

Cell size references:UM1,R20,D

**Electrical characteristics**

(Stored for one year or less)

Normina capacity (At 1mA, +25°C, 2.0V cut off)	14000mAh
Rated voltage	3.6V
Max. recommended continuous current Current value is determind to be the level at which of the nominal capacity is obtained with an end voltage of 2.0V at +25°C	2000mA
Max. Pulse current Current value is obtaining 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C	3000mA
Storage(recommended max.temperature)	30°C
Operating temperature rang	-55°C ~ +85°C
Weight(approx)	118g

**WARNING:**

Fire, explosion and severe burn hazard. Do not recharge, crush disassamble heat above 100°C, incinerate or expose contents to water.

**Key features**

- High and stable operating voltage
- Low self-discharge rate  
Less than 1% after 1 year of storage at +20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

**Main applications**



- TPMS
- Alarms and security system
- Memory back-up
- Ttracking system
- Automotive electronics
- Professinal electronics
- Computer real-time clocks

.....


# ER34615M

lithium-thionyl chloride batteries

Typical discharge profiles at 25°C

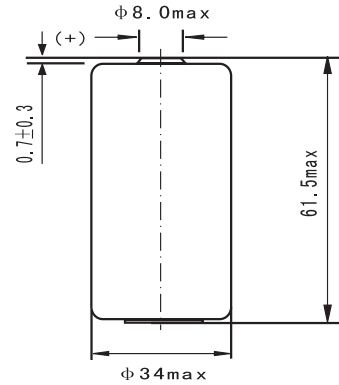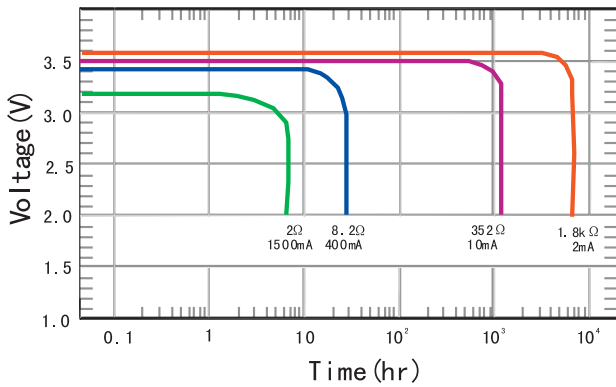


Capacity versus Current

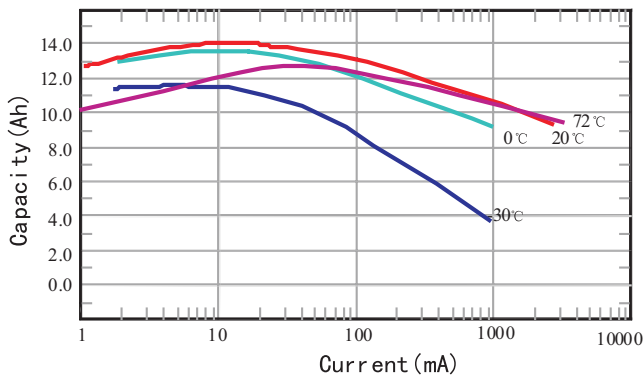

Dimensions in mm

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab

Voltage versus Temperature

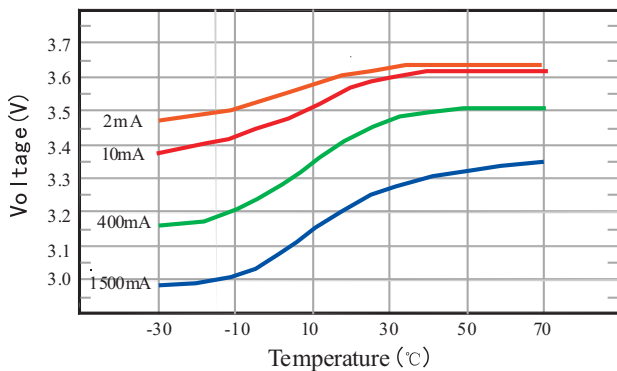

Storage characteristics

