








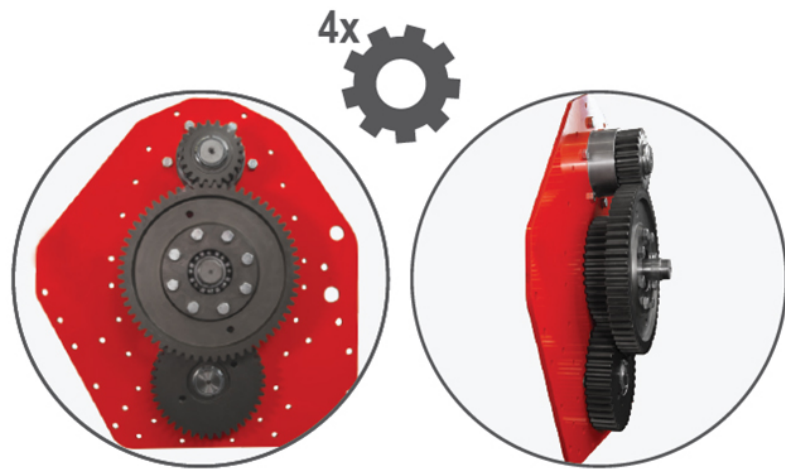


GPV-BF 380 - 620




VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Mod.	 Lavoro	 Ingombro	 HP min - max	 N° zappe *	 1000' R 1 : 1	 1000' R 1 : 1,35	 kg Rullo liscio	 kg Rullo a rete	 kg Rullo Packer Ø 323 / 470
GPV-20 380 BF	3800	4100	150 - 300	108	350	260	3100	3250	3500
GPV-25 560 BF	5600	5900	250 - 350	156	350	260	3520	3750	4120
GPV-25 620 BF	6200	6500	250 - 400	168	350	260	3650	3880	4250

* Standard: 6 zappe per flangia - 6 blades per flange - 6 Messer pro Flansch - 6 lames ch. flange

Model	 N°	L	K	X	Y	Z	H
3800	2	3830	1800	1570	1470	230	150
3800	4	3830	900	670	570	230	150
3800	2	3830	1800	1550	1400	230	230
3800	4	3830	900	670	500	230	230
3800	5	3980	750	520	410	230	150
5600	3	5630	1800	1570	1470	230	150
5600	6	5630	900	670	570	230	150
5600	3	5630	1800	1550	1400	230	230
5600	6	5630	900	670	500	230	230
6200	4	6230	1500	1270	1160	230	150
6200	8	6230	750	500	350	230	230

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
 Via dell'Industria, 27/A
 36045 Alonte (VI) - ITALY
 Tel. +39 0444 436247
 Fax +39 0444 436237
www.vigolo.com - info@vigolo.com

