


DS-2CD8253F-E
Caméra IP Extérieure 2 Mpixels
H264 / MJPEG



Caractéristiques

- Caméra extérieure IP66 - PoE
- Résolution 1600x1200 / 2 Méga Pixels
- Compression H264 / MJPEG
- Capteur Sony 1/3" CMOS Progressive Scan
- Vari Focale 2,7-9mm
- IR optionnel 20m - 0 lux

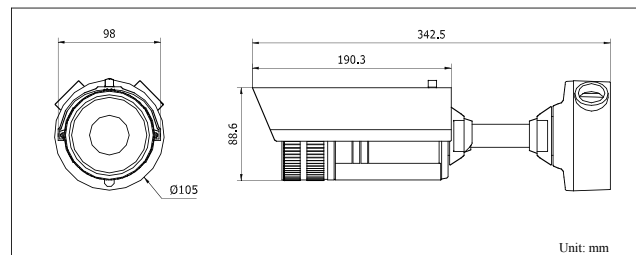

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	0.5Lux @(F1.2,AGC ON),0.1Lux @(F1.2,AGC ON) 0 LUX with IR
Shutter Time	1/25 s to 1/100,000 s
Lens	2.7 - 9 mm @ F1.2 Angle of view: 101° - 30.4°
Lens Mount	Φ14
Auto Iris	DC drive
Day & Night	IR cut filter with auto switch
Compression Standard	
Video Compression	H.264/MJPEG
Dual Stream	Yes
Image	
Max. Image Resolution	1600 x 1200
Frame Rate	50 Hz: 12.5 fps (1600 × 1200), 12.5 fps (1600 × 912), 25 fps (1280 × 960), 25 fps (1280 × 720)
Image Settings	Saturation, Brightness, Contrast adjustable through client software or web browser
Network	
Alarm Trigger	Motion detection, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP (SNMP, HTTPS, FTP, SIP, SRTP)
Security	Password protection, Watermark
Interface	
Audio Input / Output	1-ch microphone input / 1-ch audio interface (Line level, 600 Ω)
Communication Interface	1 RJ45 10 M/100 M Ethernet interface, 1 RS-485 interface
Alarm Input / Output	1 / 1
Video Output	1Vp-p composite output (75 Ω)
General	
Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply / Consumption	12 V DC ± 10% PoE (802.3af) / Max 13,5 W
Weather Proof Rating	IP66
IR Range	Approx 20 to 30 meters
Dimension / Weight	98 × 88.6 × 342.5 mm (3.86" × 3.49" × 13.48") / 1700g