




KONICA MINOLTA

# Spectrophotometer CM-M6

High Precision, Multi-Angle Spectrophotometer  
with 6 angles for Automotive Exteriors

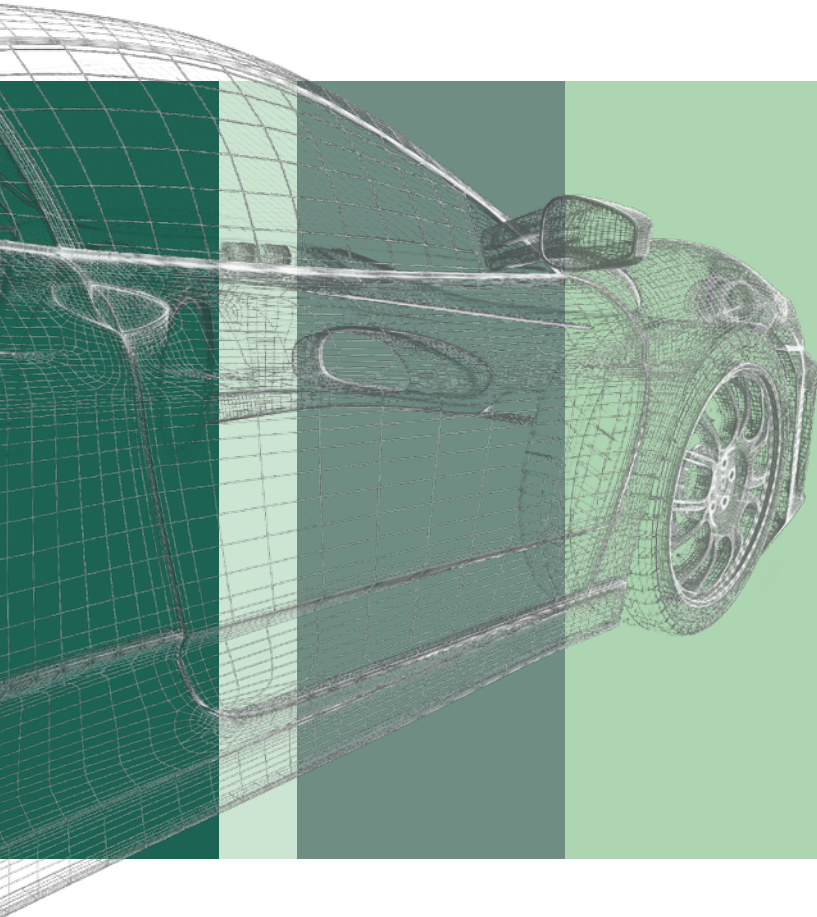

Innovative “Double-Path” Optical System  
for stable measurements even on curved  
surfaces

Compact, lightweight vertical alignment for  
easy measurements in the assembly line

Small measurement area ( $\varnothing 6\text{mm}$ ), perfect  
for small surfaces

Giving Shape to Ideas

# Accurate measurements of Automotive exterior finishes in the Assembly Line

The CM-M6 is a compact and lightweight Multi-Angle Spectrophotometer using a patented “Double Path” optical system with outstanding performance on curved surfaces and thus perfect for measurements on the assembly line.



## → Multi-Angle measurements – 45° illumination and 6 viewing angles

### Double-path optical system

Illumination angle: 45°

Aspecular viewing angles: -15°, 15°, 25°, 45°, 75°, 110°

As the appearance of effect surfaces changes with viewing angle and lighting conditions, the optical setup of the CM-M6 makes it possible to control the lightness and color travel of metallic and pearl effect finishes.

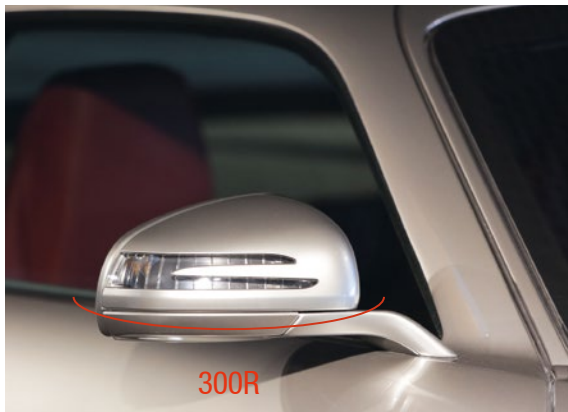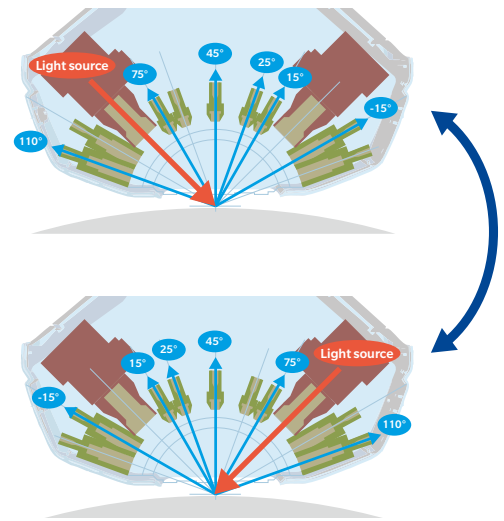

## → Double-path optical system

By using 45° illumination and 6 aspecular viewing angles from opposite sides, the “Double-Path” optical system measures two illumination paths for one reading and enables stable measurements even on curved surfaces ( $r > 300$ ).




## → Compact, lightweight with vertical alignment

Being compact and lightweight, a user can hold the vertical body of the CM-M6 with one or two hands for stable measurements. Designated to measure automotive exteriors in the assembly line, the CM-M6 offers many useful features for simple routine work, e.g. optional Bluetooth® for wireless data communication with external devices.



## → Ø6 mm measuring field for small surfaces

The measurement area is 6 mm in diameter in order to measure small surfaces with best stability and impossible to measure with normal instruments.

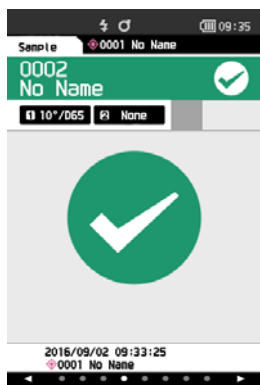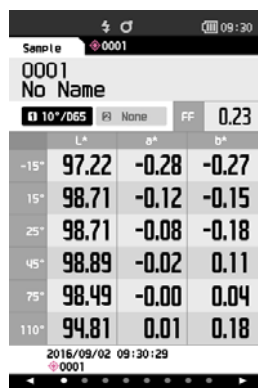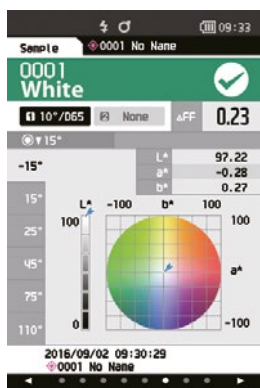

## → Colour Display

The CM-M6 has a built-in 3.5" colour LCD allowing measurement values to be evaluated numerically and graphically or just as PASS/FAIL message against a defined standard.






## Main specifications


Model	Spectrophotometer CM-M6
<b>Illumination/viewing system</b>	45° illumination : -15°/15°/25°/45°/75°/110° aspecular viewing angles with double-path technology
<b>Detector</b>	Dual 40-element silicon photodiode arrays
<b>Spectral separation device</b>	Linear variable filter
<b>Wavelength range</b>	400–700 nm
<b>Wavelength pitch</b>	10 nm
<b>Measurement range</b>	6 angles: 0–600%; Output/display resolution :0.01 %
<b>Light source</b>	High-CRI white LED
<b>Measurement time</b>	Approx. 4.5 seconds
<b>Minimum measurement interval</b>	Approx. 5 seconds
<b>Battery performance</b>	Approx. 1,500 measurements/charge (at 10-second intervals at 23°C)
<b>Measurement / illumination area</b>	Ø6 mm/Ø12 mm
<b>Repeatability</b>	Chromaticity value :Standard deviation within $\Delta E^*ab$ 0.05 (When a white calibration plate is measured 30 times at 10-second intervals after white calibration)
<b>Inter-instrument agreement</b>	Within $\Delta E^*ab$ 0.2 (Typical) (Based on 12 BCRA Series II colour tiles compared to values measured with a master body under Konica Minolta standard measurement conditions)
<b>Observer</b>	2° or 10° Standard Observer
<b>Illuminant</b>	A, C, D50, D65, F2, F6, F7, F8, F10, F11, F12 (simultaneous evaluation with two illuminants possible)
<b>Displayed data</b>	Colourimetric values, colour-difference values/graph, line graph (Colourimetric/colour-difference values), pass/fail judgement
<b>Colourimetric data</b>	$L^*a^*b^*$ , $L^*C^*h$
<b>Indexes</b>	MI, FF value (Flop value)
<b>Colour-difference formula</b>	$\Delta E^*ab$ (CIE 1976), $\Delta(L^*a^*b^*)$ , $\Delta(L^*C^*H^*)$ , CMC (l:c), $\Delta E^*94$ (CIE 1994), $\Delta E00$ (CIE DE2000), $\Delta E$ (DIN 6175)
<b>Data memory</b>	Target data: 200 measurements; Sample data: 800 measurements
<b>Pass/Fail judgement</b>	Tolerances can be set for colour-difference values
<b>Displayed languages</b>	Japanese, English, German, French, Italian, Spanish, Chinese (Simplified), Portuguese, Russian, Turkish, Polish
<b>Display</b>	3.5-inch TFT Colour LCD
<b>Interfaces</b>	USB2.0, Bluetooth (Option)
<b>Power</b>	Rechargeable lithium-ion battery (removable), dedicated AC adapter
<b>Charging time</b>	Approx. 5 hours when no charge remains
<b>Operation temperature/humidity range</b>	0–40 °C, relative humidity is 80% or less (at 35 °C) with no condensation
<b>Storage temperature/humidity range</b>	-20–45 °C, relative humidity is 80% or less (at 35 °C) with no condensation
<b>Size (W×H×D)</b>	Approx. 152 × 239 × 81 mm
<b>Weight</b>	Approx. 1.1 kg (including battery)

## System diagram

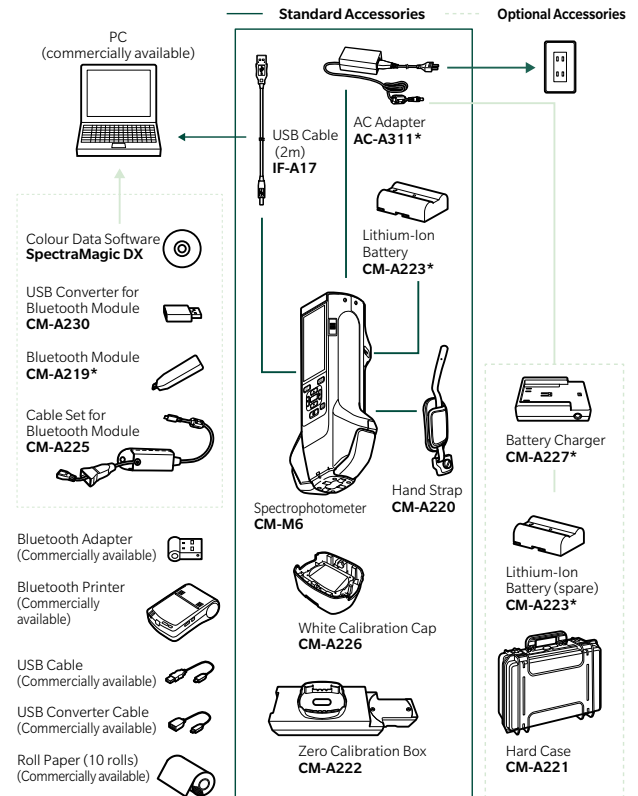

\*Not available in all areas.

## Dimensions (Unit: mm)

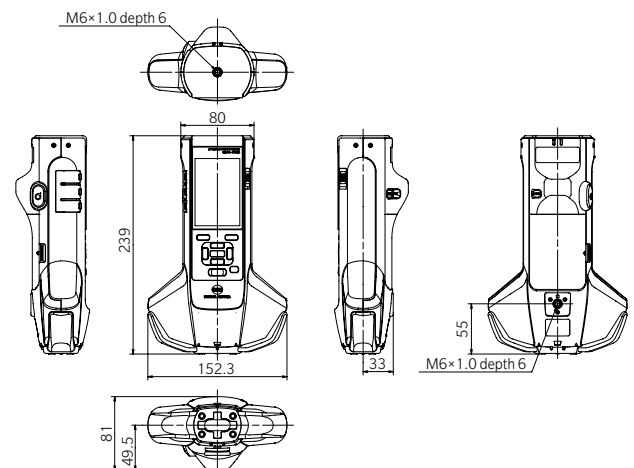

### SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.
- Be sure to use the specified batteries. Using improper batteries may cause a fire or electric shock.

- KONICA MINOLTA, the Konica Minolta logo and symbol mark, "Giving Shape to Ideas" and SpectraMagic are registered trademarks or trademarks of Konica Minolta, Inc.
- Bluetooth® is a registered trademark of Bluetooth SIG, Inc. and is used under license agreement.
- Displays shown are for illustration purpose only.
- The specifications and appearance shown herein are subject to change without notice.

KONICA MINOLTA, INC.  
Konica Minolta Sensing Americas, Inc.

Osaka, Japan  
New Jersey, U.S.A.

Konica Minolta Sensing Europe B.V.

European Headquarter  
German Office  
French Office  
UK Office  
Italian Office  
Swiss Office  
Polish Office  
Belgium Office  
Nordic Office  
SE Sales Division  
Beijing Office  
Guangzhou Office  
Chongqing Office  
Qingdao Office  
Wuhan Office

Nieuwegein, Netherlands  
München, Germany  
Roissy CDG, France  
Warrington, United Kingdom  
Cinisello Balsamo, Italy  
Dietikon, Switzerland  
Wroclaw, Poland  
Zaventem, Belgium  
Västra Frölunda, Sweden  
Shanghai, China  
Beijing, China  
Guangzhou, China  
Chongqing, China  
Shandong, China  
Hubei, China  
Singapore  
Goyang-si, Korea  
Bangkok, Thailand

Konica Minolta Sensing Singapore Pte Ltd.  
Konica Minolta Sensing, Inc.

Optics Company, Korea  
Optics Company, Sensing Business  
Thailand Representative Office

Phone: +1-888-473-2656 (in USA)  
Phone: +1-201-236-4300 (outside USA)  
Phone: +31 (0) 30 248-1193  
Phone: +49 (0) 89 4357 156 0  
Phone: +33 (0) 1 80-11 10 70  
Phone: +44 (0) 1925 467300  
Phone: +39 028 49488.00  
Phone: +41 (0) 43 322-9800  
Phone: +48 (0) 71 734 52-11  
Phone: +32 (0) 2 7170-933  
Phone: +46 (0) 31 7099464  
Phone: +86-(0) 21-5489 0202  
Phone: +86-(0) 10-8522 1551  
Phone: +86-(0) 20-3826 4220  
Phone: +86-(0) 23-6773 4988  
Phone: +86-(0) 532-8079 1871  
Phone: +86-(0) 27-8544 9942  
Phone: +65 6563-5533  
Phone: +82 (0) 2-523-9726  
Phone: +66-2361-3730

marketing.SUS@konicaminolta.com

info.sensing@seu.konicaminolta.eu  
info.germany@seu.konicaminolta.eu  
info.france@seu.konicaminolta.eu  
info.uk@seu.konicaminolta.eu  
info.italy@seu.konicaminolta.eu  
info.switzerland@seu.konicaminolta.eu  
info.poland@seu.konicaminolta.eu  
info.belux@seu.konicaminolta.eu  
info.nordic@seu.konicaminolta.eu  
hcn\_sensing@hcn.konicaminolta.cn  
hcn\_sensing@hcn.konicaminolta.cn  
hcn\_sensing@hcn.konicaminolta.cn  
hcn\_sensing@hcn.konicaminolta.cn  
hcn\_sensing@hcn.konicaminolta.cn  
cn\_sensing@hcn.konicaminolta.cn  
ssg@konicaminolta.sg  
sensing-gc@konicaminolta.jp  
sensing-gc@konicaminolta.jp



Certificate No: YWA 0937 154  
Registration Date:  
March 3, 1995



Certificate No: JDA-E-80027  
Registration Date:  
March 12, 1997