

ATEX

ATEX 3rd Party Certified

C_e 0081 II 1/3D

External: Ex h tc IIIC T200°C (T85°C for BLS version) Dc IP6X

Internal: Ex h IIIC T200°C (T85°C for BLS version) Da

LCIE 15 ATEX 3061

Zone 20 (Dust) providing a very High Protection Level inside the Recovery Tank

For the Safe Recovery of Combustible Dusts

ESD Safe Vacuum Systems for Hazardous Locations are designed to prevent ignition hazards.

We use metal parts or Static Dissipative Powder Coating to prevent Electrostatic Discharge (ESD)

IECEx 3rd Party Certified



External: Ex h tc IIIC T200°C (T85°C for BLS version) Dc IP6X

Internal: Ex h IIIC T200°C (T85°C for BLS version) Da

Characteristics



Static Dissipating




HEPA - Included



High Filtration Efficiency Unit



Stainless Steel General



SD Accessories - Included




Dry Recovery



EX Certified



Brushless Motor Available

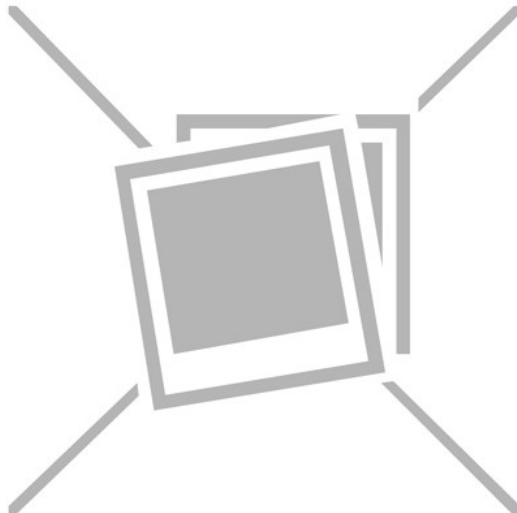

- Ideal for housekeeping and general cleaning
- Includes 4 HEPA filters. Class H14. Individually factory tested
- Heavy duty 2-stage by-pass motor
- Longer life brushless motor available. Always with 4 x H14 HEPA filters
- Material to be recovered within a conductive cloth recovery bag
- Includes an indicator light to warn of vacuum blockage
- Recovery tank made of stainless steel Type 430. Recovery tank made of stainless steel Type 304 is also available
- Includes a complete static dissipative tool kit

Specifications

C-10 EX (4W) FOR EXPORT (NON-EU MARKETS)	111805C	111805E
Model Name	C-10 EX (4W)	C-10 EX (4W)
Type (Powerhead)	Electric	Electric
Tension	220-240 V	220-240 V
Frequency	50/60 Hz	50/60 Hz
Phase	Single	Single
Wattage	1200 W	1200 W
Power	1.2 kW	1.2 kW
Amperage	5 A	5 A
Air Flow	194 m ³ /h	194 m ³ /h
Vacuum Pressure	2504 mm H ₂ O	2504 mm H ₂ O
Sound Level	72 dB(A)	72 dB(A)
Type of Power Outlet	UK	Chinese
Suction Inlet	60 mm	60 mm
Cart Type	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
Dry Recovery - Disposable Filter Bag	19 L	19 L
Length	43 cm	43 cm
Width	43 cm	43 cm
Height	93 cm	93 cm
Weight (Vacuum Only)	24 kg.	24 kg.
Cord Length	10 m	10 m
HEPA/ULPA Filter Surface Size	20 253 cm ²	20 253 cm ²
Main Cloth Filter Surface Size	3 480 cm ²	3 480 cm ²
Conductive Recovery Bag Filter Surface Area	8 217 cm ²	8 217 cm ²

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



C-10EX Static Dissipative Tools and Accessories - Included



Main Cloth Filter with Cage, Static Dissipative - Included



Conductive Recovery Bags - included



Upstream HEPA Filter - Included



Cable Holder Hook included on the side of the powerhead



Longer Life Brushless Motor Available (always with 4 x H14 HEPA filters)