

# TM-PC215 21.5" Full HD Pcap. Touch industrial Monitor




## ● Specification

Basic	
Front panel	Magnesium-Aluminum alloy, anodized treatment
Rear panel	SGCC plate sheet, sand-blasting
Control button	OSD button on rear panel
Signal input	1*VGA, 1*DVI
Mount method	Panel mount, VESA 75/100
Overall dimension	527 * 318.7 * 55 (mm)
Cutout dimension	516 * 308 (mm)
Net weight	6KG
IP rating	Front Panel IP65
LCD display	
Size & Type	21.5" TFT LCD
Resolution	Full HD 1920 * 1080
Backlit & MTBF	LED backlit & 30 000 hours
Brightness	250 nits
Display area	476.64 * 268.11
View angle	89/89/89/89 (Full view)
Touch	
Type	Projective capacitive touchscreen (Pcap.)
Touch interface	USB (Optional with RS232)
Touch points	Multi-points, max. up to 10 points
Durability	>100 000 000 times
Surface hardness	Mohs 6H
Special treatment	Anti-fingerprint (AF)
Power & environmental	
Voltage input	DC 12V (Optional with DC 9~36V)

Operating temp.	0 ~ + 60°C
Storage temp.	-20 ~ + 70°C
Relative humidity	10 ~ 95% @ 10C (No condensation)
Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
Shock	10G/Peak (11ms)
Power consumption	Around 25W
EMC	CE/FCC Class A

## ● Dimension

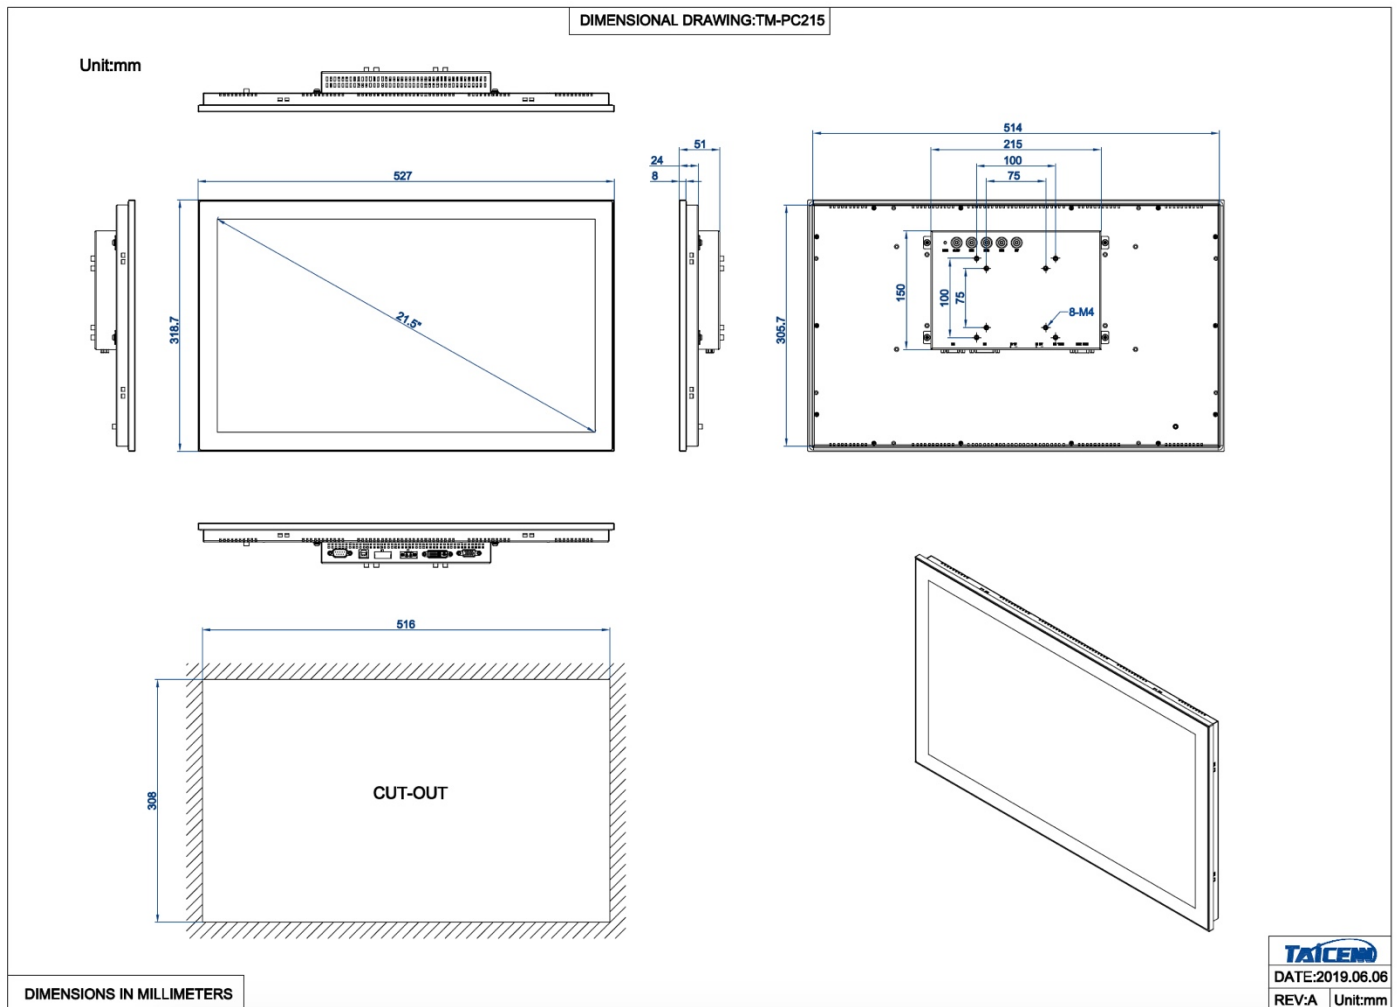

## ● Ordering information

TM-PC215	21.5" LCD, 1920*1080, Pcap. touch, USB interface, 1*VGA, 1*DVI, DC 12v, 40W power adapter
TM-PC215W	21.5" LCD, 1920*1080, Pcap. touch, USB, 1*VGA, 1*DVI, DC 9~36v, default no power adapter
TM-PG215	21.5" LCD, 1920*1080, Tempered glass (no touch), 1*VGA, 1*DVI, DC 12v, 40W power adapter
TM-PG215W	21.5" LCD, 1920*1080, Tempered glass (no touch), 1*VGA, 1*DVI, DC 9~36v, default no power adapter
TM-PC215S	21.5" LCD, 1920*1080, Pcap. touch, RS232 interface, 1*VGA, 1*DVI, DC 12v, 40W power adapter
TA-DVI2HDMI	HDMI to DVI convert cable, 1.8m length
TA-PSU02	40W power adapter (Optional to order when wide voltage input)