



## Yuasa Fiche de données techniques

### Yuasa YBX3063 - Batteries SMF YBX3000

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Tension	12V
Capacité (20 heures)	45Ah
Performances en démarrage à froid (EN1)	440A

#### Dimensions

Longueur	207mm
Largeur	175mm
Hauteur	175mm



#### Poids & Mesures

Poids moyen avec acide	11.6kg
------------------------	--------

#### Caractéristiques du bac

Type de bac	LB1 DIN
Système de fixation	B13B14
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


#### Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	3A
Performance Marking	W3-C2-V2-E1


#### Type de bornes

##### T1

Standard DIN Post

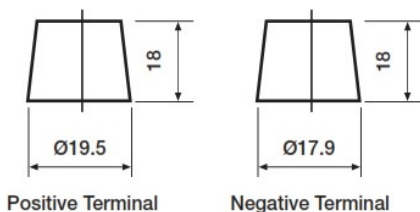


#### Schéma de montage des éléments

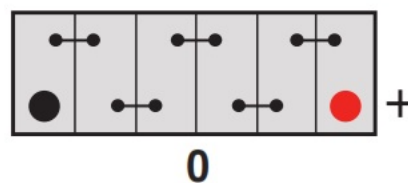

#### Système de fixation de la batterie

B3/B4 (B3 with Hold-Down adaptor)

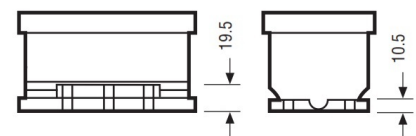

Date de publication: 10/02/2021 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX3063 - YBX3000 SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	440A

#### Dimensions

Length	207mm
Width	175mm
Height	175mm

#### Weights & Measures

Mean Weight with Acid	11.6kg
-----------------------	--------



#### Container Features

Case Type	LB1 DIN
Hold Down	B13B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1

#### Terminal Type

##### T1


Standard DIN Post

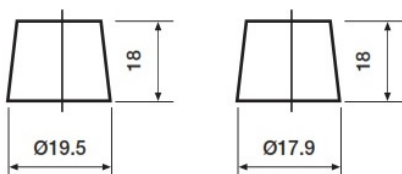

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

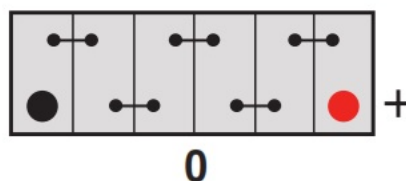

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

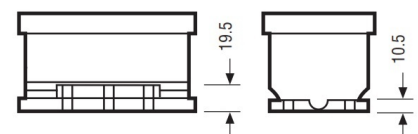

Data Sheet generated on 10/02/2021 - E&OE