





HEK Manufacturing BV

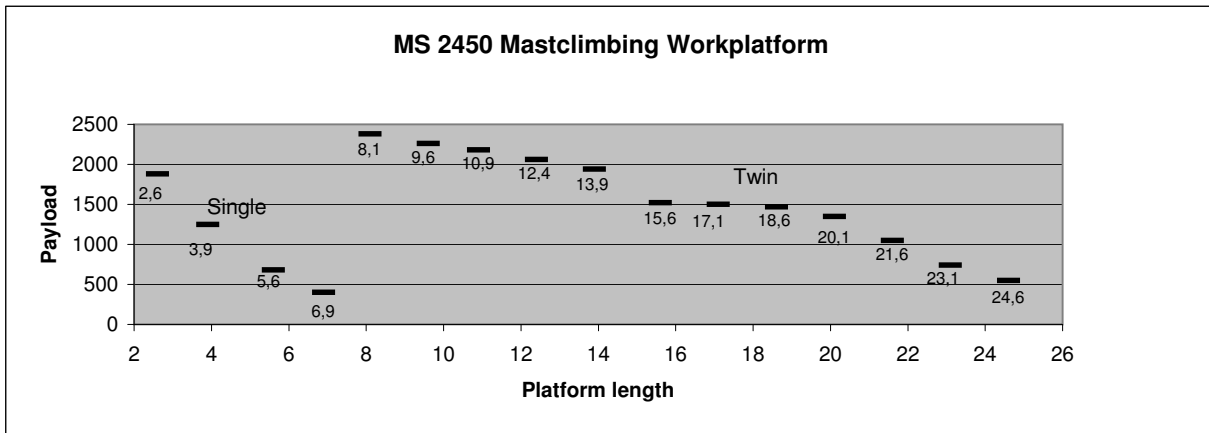

Technical Data		Single	Twin
Capacity			
Min/ Max platform length	m	2.6 / 6.9	8.1 / 24.6
Max Payload capacity	kg	1880	2380
Speed	m/min	9.7	9.7
Max lifting height untied on groundframe	m	0	0
Max lifting height tied	m	100	100
Tie distance	m	6	6
Max mastheight above last anchor	m	3	3

Dimensions and weights		
Lowest transport height	mm	1800
Height to platform	mm	1100
1.5m platform section	kg	72
	mm	1500 x 800
0.8m platform section	kg	45
	mm	820 x 800
1.5m mast section	kg	46
Drive unit	kg	680
	mm	1100 x 1000 x 1000
Groundframe	mm	1700 x 1890
	kg	265

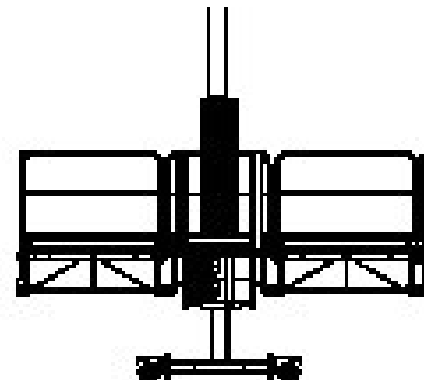

Electrical Data				Safety equipment
Rated power	kW	2 x 1.5	4 x 1.5	Overrun limit switch during erection
Voltage	V		380	Overrun limit switch in service
Control Voltage	V		220	Safety switch at access door
Control Voltage Frequency	Hz		50	Double germotor with automatic braking electric motor
Starting current	A	10	20	Centrifugal brake
Power consumption	kW	2 x 1.5	4 x 1.5	Manual brake release in emergency
Power supply fuses	V	220	220	Upper/ Lower limit switch
				Half rack in Top mast section
				Phase sequency relay for command

HEK Manufacturing BV, PO Box 2, 5090 AA Middelbeers, The Netherlands

Tel: +31 (0) 13 514 8653, Fax: +31 (0)13 514 8630

E-mail: info@HEK.com, Web site: www.HEK.com