

GENUA

GENUA Lichtpoller

12.77400.0V003 12XLED 12W SKI (3000K)

Illuminating bollard GENUA

Made of aluminium, rectangular profile

Square-shaped luminaire head

Glass cover of PET, transparent

Equipped with 12 LED - approx. 12W

Colour temperature: white (approx.3000K)

Operating voltage 220-240V/50-60Hz

Ingress protection IP65, protection rating I

Total height above ground 900 mm

LSH 835 mm

Embedded base (500 mm) with 2 openings for cable entry

Pre-wired with 700mm H05SS-F 3G 1,0mm²

Colour: DB 703



Technical values

Wind catching surface 0,15 m²

ULOR 0%

Ingress protection IP65

Rated input power [W] 12.0

Rated luminous flux [lm] 892.0

Efficiency [lm/W] system 74.3

LED lifetime:

L80 B10 / 85.000h - TA ≤ 25°C

L70 B10 / 50.000h - TA >25 - ≤50°C

CE

Advantages

- Minimalist, modern design
- Easy maintenance and installation



Downloads

Drawings: [Genua_LP_ER.png](#)

Installation instructions: [HessMA_GENUA_LED.pdf](#)

Photometric data: [GENUA_illuminating_bollard.zip](#)

GENUA Drawings

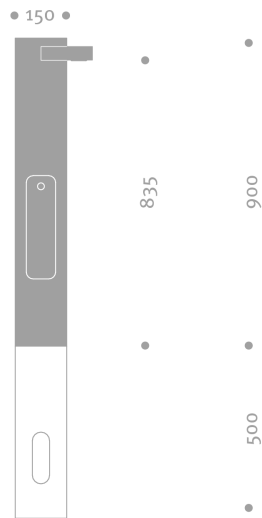

Projects



Kohler Betriebseinrichtungen
DE - Immendingen



Kohler Betriebseinrichtungen
DE - Immendingen



Kohler Betriebseinrichtungen
DE - Immendingen