



Rio

Rio Powertrack



Description :

Surface mounted LED spotlight.


Uses :

Supermarkets, shops, etc....

Product informations :

LED driver included / Material : die-cast aluminium / CRI > 80 (Standard LED sources)

Dimensions :

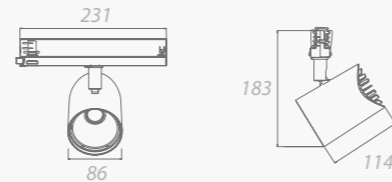

Wattage, luminous flux and performance (standard light sources) :

		Flux	Wattage	Performance	Lamp life
3000°K	2000 Lm	2688 Lm	17,3 W	155 Lm/W	50 000 heures L80 B10
3000°K	3000 Lm	3402 Lm	24,8 W	137 Lm/W	50 000 heures L80 B10
3000°K	4000 Lm	4384 Lm	29,5 W	149 Lm/W	50 000 heures L80 B10
4000°K	2000 Lm	2320 Lm	13,6 W	171 Lm/W	50 000 heures L80 B10
4000°K	3000 Lm	3505 Lm	23 W	152 Lm/W	50 000 heures L80 B10
4000°K	4000 Lm	4580 Lm	29,4 W	156 Lm/W	50 000 heures L80 B10
5000°K	2000 Lm	2320 Lm	13,6 W	171 Lm/W	50 000 heures L80 B10
5000°K	3000 Lm	3505 Lm	23 W	152 Lm/W	50 000 heures L80 B10
5000°K	4000 Lm	4580 Lm	29,4 W	156 Lm/W	50 000 heures L80 B10

Wattage, luminous flux and performance (in specific colours) :

Food	2186 Lm (equivalent to 4000 lm + food filter)	27,9 W	78 Lm/W	60000 heures L80 B50
Bakery	2253 Lm (equivalent 4000 lm + bakery filter)	27,9 W	81 Lm/W	60000 heures L80 B50
Seafood	2046 Lm (equivalent to 4000 lm + food filter)	27,9 W	74 Lm/W	60000 heures L80 B50
Shop	3209 Lm	27,9 W	115 Lm/W	60000 heures L80 B50
Fish	3847 Lm	28,8 W	134 Lm/W	50000 heures L80 B20

Filters :

For standard light sources : Standard / food / bakery / opaline


Mountings :

On triple circuit rail adaptor with integrated driver

Finishes :

White (9016G) / Grey (9006G) / Black (9005G) / RAL colour chart

Light distribution curves :

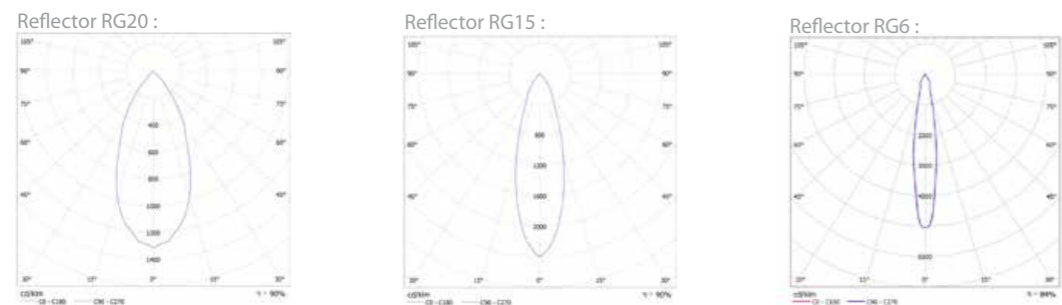

(Ta < 35°C)

Not contractual document



Rio Powertrack on triple circuit rail adaptor with integrated driver...

