

Monolith-2000CA

Intel® Elkhart Lake
Celeron J6412 / Atom X6425E processor



Features

- Intel® Celeron® J6412 quad-core 2.0 GHz processor
- 1 x DDR4 3200MHz SODIMM, MAX 32GB
- 1 x 2.5 SATA HDD, 1 x M.2 2280 SATA SSD
- 1 x M.2.0 (2230, Wifi+BT), 1 x M.2.0 (3042/3052, 4G/5G)
- Supports dual independent display: 1 x HDMI, 1 x DP
- 3 x Intel® 226-V 2.5GbE Ethernet, support WoL and PXE
- 6 x COM (4x RS232/RS422/RS485), ESD and Surge Protection
- Support TPM2.0 hardware security
- Wide Operating Temperature -30°C to 70°C
- 9V to 36VDC Wide Range Power Input, Supporting OVP / OCP / RPP

Specifications

System		
CPU	Intel® Elkhart Lake Celeron J6412 2.0GHz	Intel® Elkhart Lake Atom X6425E 2.0GHz
L2 Cache	1.5MB	1.5MB
TDP	10W	10W
System Chipset	Integrated with Intel® SoC	
Memory	DDR4L 3200MHz 4GB, MAX 32GB	
Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA	
Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors	
Network	Intel® 226-V GbE LAN	
Audio	Realtek ACL897 Audio controller	
TPM	TPM 2.0	
Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset	
Operation System	Windows 10 / 11, Linux, Ubuntu	
I / O		
VIDEO	1 x DP / 1 x H-DMI	
Ethernet	3 x LAN 10/100/1000/2500 Mbps	
USB	6 x USB2.0 / 4 x USB3.0	
COM	2 x RS-232 / 4 x RS-232 / 422 / 485 (Adjustable through BIOS)	
Audio	1x Audio_out & Mic_in	
Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)	
Expansion		
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)	
	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)	
	1*M.2 (Key-M, 2280 SATA, SSD)	
Expansion	1*mPCe	
SIM Socket	1x SIM Socket	
Power		
Power Adapter	1 x Optional AC/DC 12V/5A , 60W	
Power Mode	Support AT, ATX Mode	
Power Input	2-pin Terminal Block Connector with Power Input 9~36VDC	
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) RPP (Reverse Polarity Protection)	
Power Consumption	≤30W	

Monolith-2000CA


Physical

Material	Aluminum Alloy Shell
Color	Grey / Silver / Black (optional)
Mounting	208 x 100 mm / 208 x 60 mm
Product Dimension	220 x 145 x 62 mm
Packing Size	360 x 180 x 320 mm
Weight (Net)	1.5 KG

Environment




Operating Temperature	-30~70°C (-22~158°F)
Storage Temperature	-40~85°C (-40~185°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
EMC	CE, FCC, Class A, ROHS

Dimension & I/O

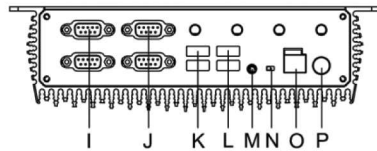

I/O Definition:

I: COM3 / COM4	J: COM5 / COM6
K: 2 x USB	L: 2 x USB
M: AUDIO	N: AT/ATX
O: Extension Switch	P: Power Button

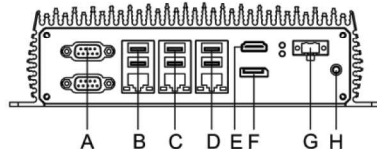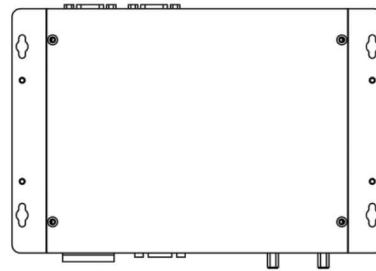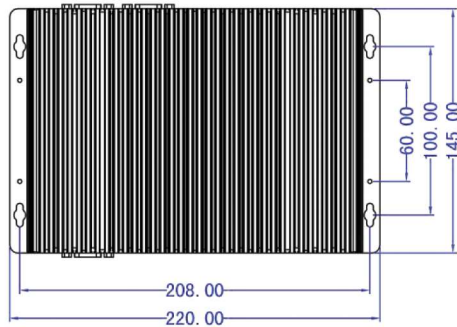

I/O Definition:

A: COM1 / COM2	B: 2 x USB3.0 / LAN
C: 2 x USB3.0 / LAN	D: 2 x USB2.0 / LAN
E: H-DMI	F: DP
G: DC 9V-36V	H: GND

Ordering info

Available models	Description
EFIC-2000CA	Embedded Fanless Industrial Computer Intel® Elkhart Lake Celeron J6412 2.0GHz Processor
EFIC-2000XA	Embedded Fanless Industrial Computer Intel® Elkhart Lake Atom X6425E 2.0GHz Processor

Packing list

1 x Standard product
1 x 60W PSU (Power Supply)
1 x CD-ROM

Mail : contact@evi.biz - Web : www.evi.biz