

CENTO 350 LED

CENTO 350 LED Lichtpoller
12.71742.0V001 1X LED E27

Illuminating bollard CENTO 350
Housing made of aluminium \varnothing 160 mm
Cover of polyacrylic glass (PMMA) with frosted surface
Elec. equip.: 1xE27 socket for LED lamp (220-240V/50-60Hz)
Without lamp (Type P 40, max. 7W)
Ingress protection IP54, protection rating I
Bollard of aluminium tube \varnothing 160 mm
Total height 350 mm
With flange plate \varnothing 220 mm
Connection: 3 x 2,5 mm² terminal in the base of the bollard
Colour: DB 703

Technical values

ULOR	67,5%
Ingress protection	IP54
CE	



Advantages


- The CENTO product family makes integrated lighting solutions possible
- Lateral light output for homogeneous illumination
- Cylindrical luminaire design

Downloads

Drawings:	Cento_350_LP.png
Installation instructions:	HessMA_CENTO_LED.pdf
Photometric data:	CENTO_illuminating_bollard.zip

CENTO 350 LED

Drawings

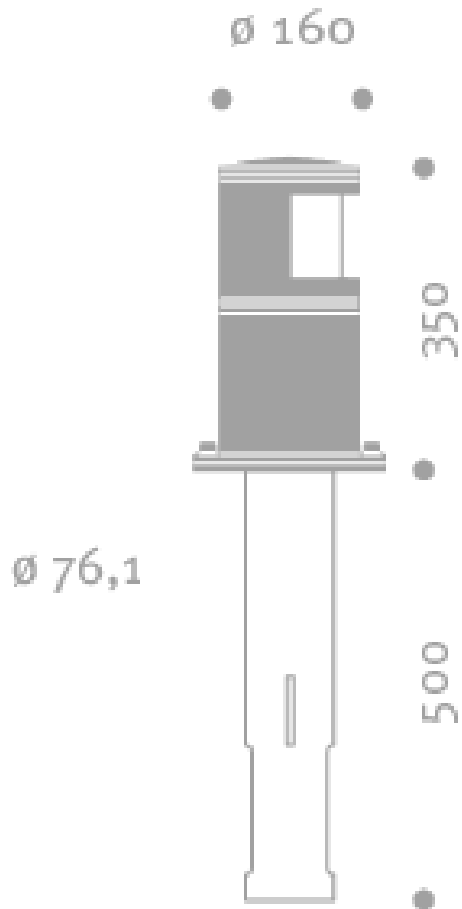

Projects



Solarlux GmbH
DE - Melle



Solarlux GmbH
DE - Melle