



K.SLH 6


EXCELLENCE IN HEAVY DUTY TRANSPORTATION BY KÄSSBOHRER

Kässbohrer's extendable hydraulic steering 6 axle low-bed semi-trailer, K.SLH 6, with 106 tons transport capacity, is designed for all types of heavy duty transportation. Engineered with hydraulic steering axles and wireless remote control, K.SLH 6 offers maximum maneuverability and flexibility under the toughest road and working conditions. Providing a gooseneck capacity of 34 tons and extendable up to 15.2 meters, K.SLH 6 is developed for the extreme heavy duty transport.



K.SLH 6 / 4H - 24 / 60

SPECIFICATIONS

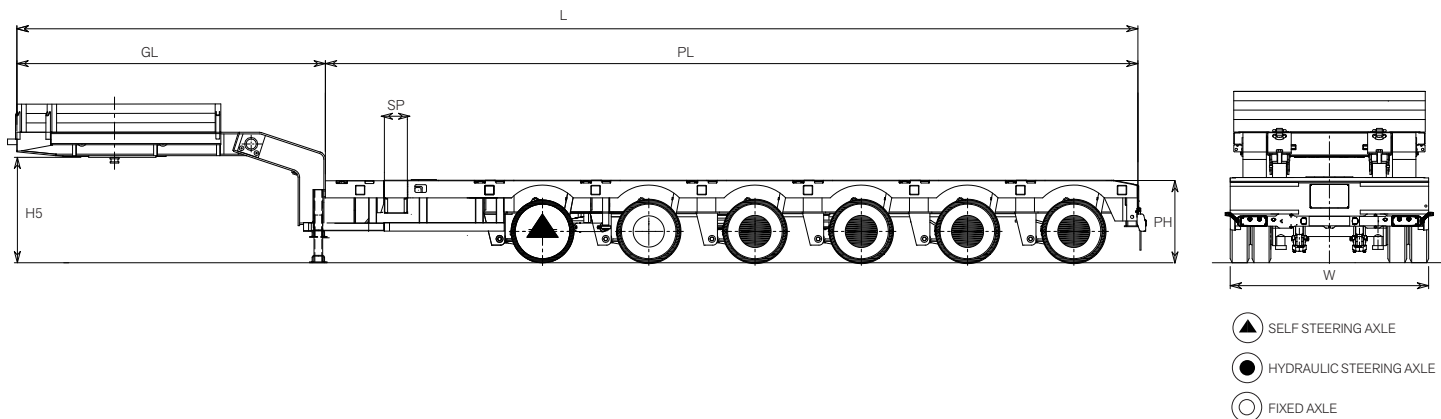

Technical Information

Chassis	S700 MC high strength steel
Axles and Suspension	SAF axles, 12 t technical capacity drum brakes, air or hydropneumatic suspension
Brake System	Wabco EBS 4S/3M dual circuit electro-pneumatic brake system according to 71/320/EEC
Electric System	24 Volt lighting installation with 2 x 7 pin plug socket according to 76/756/EEC
Gooseneck	34 t hydraulic adjustable
Steering	1 fixed, 1 self steering, 4 hydraulic steering
Tyres	24 + 1 units 245/70 R 17,5 tyres and steel rims
Axle Lifting	1st Axle lifting
Axle alignment	Auto alignment system
Powerpack	Electropump or motorpump for hydraulic functions

Technical Data

H5	5th Wheel Height	1.350 mm
L	Total Vehicle Length (closed/extended)	14.040 mm / 29.540 mm
GL	Gooseneck Length	3.950 mm
PL	Platform Length	10.390 mm
PH	Platform Height (loaded)	960 mm
W	Total Width	2.540 mm
SP	Sliding Platform Length	300 mm

Technical Capacities

Tare Weight	23.000 kg ±%3
Total Permissible Weight (80 km/h)	97.000 kg
Total Permissible Weight (60 km/h)	102.000 kg
Total Permissible Weight (40 km/h)	106.000 kg

ENHANCED FEATURES

Product Range

For different customer needs, Kässbohrer hydraulic steering low-bed product family includes 3 to 8 axles with single or double extension and width options of 2.540 mm, 2.750 mm and 3.000 mm.

Load Security

Kässbohrer hydraulic steering low-bed product family is equipped with a wide range of load security options.

-Lashing rings:

- Gooseneck: 3 x 2 lashings rings with 6,7 t capacity
- Platform: 8 x 2 lashings rings with 6,7 t capacity

- 7 x 2 pillar pockets with 68 mm x 102 mm

- 2 x 2 units extension warning plates with 423 mm x 423 mm, extendable up to 400 mm

Special Options

- 9 x 2 units of 230 mm hot dipped galvanized side extension brackets

- Gooseneck panels

- Wide ramp options:

- 3.000 mm x 800 mm extendable hydraulic ramps
- 4.000 mm x 800 mm extendable hydraulic ramps

Kässbohrer semi-trailers are manufactured according to lean production and quality principles in consideration of total cost of ownership.

Kässbohrer reserves the right to alter the product specification. Visual and the technical data subject to change according to vehicle configuration.

Kässbohrer Fahrzeugwerke GmbH Siemensstraße 74, 47574, Goch Deutschland | T 0049 2823 9721-0 | F 0049 2823 9721-21 | info@kaessbohrer.com | www.kaessbohrer.com