




Rett Bollard

External lighting



Architectural luminaire featuring a uniformly lit lens offered in various heights. Suitable for pathways, gardens, driveways or plaza areas.

Construction: Extruded aluminium housing. Internal LED Driver. IP65, IK08.

Lens: Polycarbonate Opal Lens, to 1m max.

Installation: Flanged, with Anchor Bolts (minimum 180mm planting depth).

Finish: Light Grey as standard. Anthracite Grey or Wooden Effect Finish on request.


LED: Available in 4w-28w LED. 4K as standard, 3K on request.

Options: Different Heights.

Manufactured: EU.

Product Compliance: EN 60598, CE.

DIMENSIONS

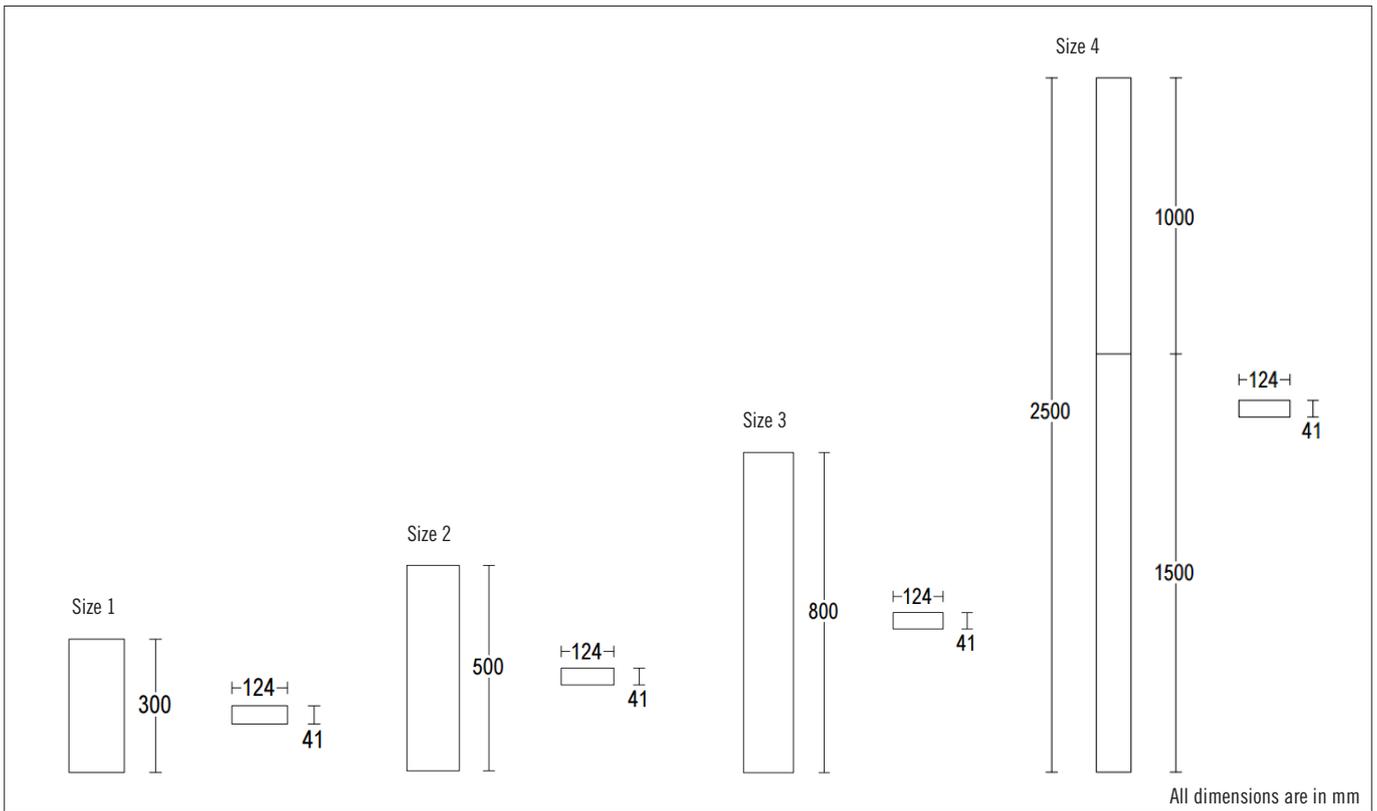

ORDERING CODE

Wattage	Type	Code	Size	Description	+Anchor Plate	Lumens*
4w	LED	G-1421.EVX.0	1	Rett Bollard, Flanged, 4K, Internal Driver	G-274	360 lm
7w	LED	G-1422.ALX.0	2	Rett Bollard, Flanged, 4K, Internal Driver	G-274	600 lm
11w	LED	G-1423.CBX.0	3	Rett Bollard, Flanged, 4K, Internal Driver	G-274	960 lm
28w	LED	G-1424.FPX.0	4	Rett Bollard, Flanged, 4K, Internal Driver	G-293	2900 lm

*Source lumens

OPTIONS

RAL: Pls specify

3K: 3000K, Warm White

.05: Anthracite Grey

.13: Light Grey Finish