

Technical Data

Upper Deck	Standard pallet without foot plugs and caps			Heavy duty reinforced type with metal bars, foot plugs and caps			
Lower Deck		Solid /Perforated Deck (HDPE)	Solid /Perforated Deck (PP)	Solid /Pe Deck (I		Solid /Perforated Deck (PP)	
Pallet with 3 runners	Weight** (kg)	16.5	16	25.5		25	
	Static load (kg)	6000	8000	6000		8000	
	Dynamic Load (kg)	1800	2000	1800		2500	
	Racking (kg)	600	900	1500		2000	
Dimensions (mm)	1200 x 1000 x 150						
Raw Materials	PP / HDPE						
Temperature Range	-40°C up to 60°C (HDPE)						
Qty in Container (Units)	Container 2	20'	Container 40'	iner 40' C		ontainer 40HC	
	206		436		492		

Tested according to ISO 8611.

 $^{\star}~$ Due to deviations in the manufacturing process, tare weight may vary $\pm\,300$ gr.

MV-1000










Kibbutz Dvir M.P. HaNegev 85330
Tel: 9 7 2 - 8 - 9 1 1 1 7 0 0
Fax: 9 7 2 - 8 - 9 9 1 8 7 1 0
Email: dolav@dolav.com
Website: www.dolav.com





THE MULTI-VERSION PALLET MV-1000

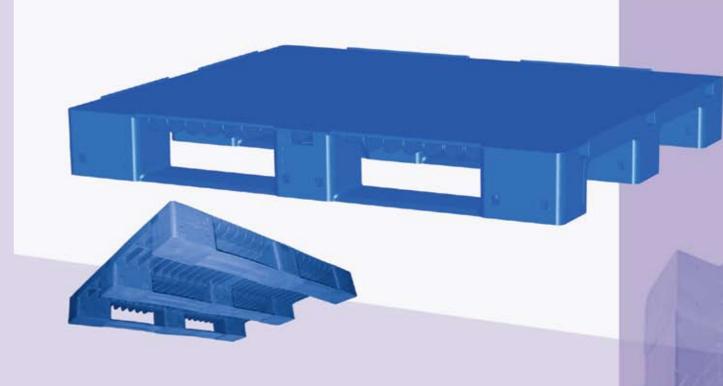

The unique multi-version pallet

- Standard or reinforced racking version
- 2 upper deck options
- 3 lower deck options
- Excellent racking performance
- HDPE or PP, structural foam technology
- Fully recyclable
- Long life span
- RFID compatible
- Open hygiene lower deck easy to clean
- Food grade approved material



^{**} Optional: set of foot plugs and caps, weight 2.8 kg



MV 1000 – the multi version pallet

Standard OR reinforced racking version


This pallet is the perfect solution for many applications, with great performance, easy to clean and hygienic. Pallet static load up to 8000 KG.




Standard pallet

Heavy duty reinforced pallets for Racking systems

This sturdy pallet is designed for heavy-duty use with reinforcements to suit up to 2000 KG, in RACKING systems.





Length reinforcement


Width reinforcement


Upper Deck Options Solid **Perforated**


Lower Deck Options

Three runners










Options

Foot plugs



Special foot design, gives us excellent performance. Plugs seal the foot area.

Raw material

HDPE standard. optional raw material:PP

Outer safety rim

Optional safety outer rim along the edge of the pallet



standard pallet includes outer rim

RFID compatible

4 places to add RFID or barcodes area 9.5X9.5cm.





Colours

Plastic caps

Caps



Standard colours: blue U.M dark grey





more colours available for min. quantity of 500 units.

Logo

Hot stamp or embossed logo



