





Standard JOTA...



JOTA 230 version...

Description :

Waterproof LED spotlight


Uses :

Supermarkets, shops, parkings, facade, etc....

Product informations :

LED driver included / Material : painted aluminium

Dimensions :

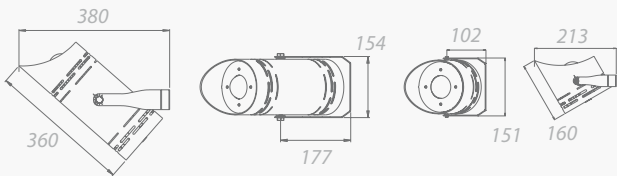

Wattage, luminous flux and performance (STANDARD VERSION) :

	23,6W	36,4W	54,6W	Lamp life
2700°K	3500 Lm 148 Lm/W	5000 Lm 138 Lm/W	7300 Lm 134 Lm/W	60 000 hours L80 B10
3000°K	3765 Lm 160 Lm/W	5400 Lm 148 Lm/W	7850 Lm 144 Lm/W	60 000 hours L80 B10
3500°K	3835 Lm 162 Lm/W	5500 Lm 151 Lm/W	8000 Lm 147 Lm/W	60 000 hours L80 B10
4000°K	3910 Lm 166 Lm/W	5600 Lm 154 Lm/W	8150 Lm 149 Lm/W	60 000 hours L80 B10
5000°K	3950 Lm 167 Lm/W	5660 Lm 155 Lm/W	8250 Lm 151 Lm/W	60 000 hours L80 B10

Wattage, luminous flux and performance (JOTA 230 VERSION) :

		Flux	Wattage	Performance	Lamp life
1000 Lm	2700°K	850 Lm	10 W	85 Lm/W	50 000 hours L70 B50
1000 Lm	3000°K	900 Lm	10 W	90 Lm/W	50 000 hours L70 B50
1000 Lm	3500°K	930 Lm	10 W	93 Lm/W	50 000 hours L70 B50
1000 Lm	4000°K	950 Lm	10 W	95 Lm/W	50 000 hours L70 B50
1000 Lm	5000°K	1000 Lm	10 W	100 Lm/W	50 000 hours L70 B50
2000 Lm	2700°K	1700 Lm	20 W	85 Lm/W	50 000 hours L70 B50
2000 Lm	3000°K	1800 Lm	20 W	90 Lm/W	50 000 hours L70 B50
2000 Lm	3500°K	1860 Lm	20 W	93 Lm/W	50 000 hours L70 B50
2000 Lm	4000°K	1900 Lm	20 W	95 Lm/W	50 000 hours L70 B50
2000 Lm	5000°K	2000 Lm	20 W	100 Lm/W	50 000 hours L70 B50

Versions :

Standard JOTA / JOTA 230

Mountings :


In protrusion on calliper (included)

Finishes :


White (9016G) / Grey (9006G) / Black (9005G) / RAL colour chart

Light distribution curves :

Road optic



Symmetrical optic



(Ta < 35°C)

Not contractual document