

ARVAL 5 - XLC TYPE Balancers from 100 to 200kg



■ XLC type (Extra Large Casted)

| Designation | ARO reference | Load range (kg) | Stroke (m) |
|-------------|------------------|--------------------|---------------|
| XLC100 | YZKA725108 | 100 - 115 | 2 |
| XLC115 | YZKA725109 | 115 - 130 | 2 |
| XLC130 | YZKA725110 | 130 - 140 | 2 |
| XLC140 | YZKA725111 | 140 - 150 | 2 |
| XLC150 | YZKA725112 | 150 - 170 | 2 |
| XLC170 | YZKA725113 | 170 - 180 | 2 |
| XLC180 | YZKA725114 | 180 - 190 | 2 |
| XLC190 | YZKA725115 | 190 - 200 | 2 |

Accessories

Stainless steel cable




Quality without compromise

Main features

- Cast aluminium casing and cover
- Gradual adjustment of the effective load by endless screw
- > Tapered drum (high strength aluminium)
- Spring encapsulated (safety)
- Insulated cable
- > Swivel
- > Safety chain

Main applications

- ➢ Welding guns
- Heavy tooling

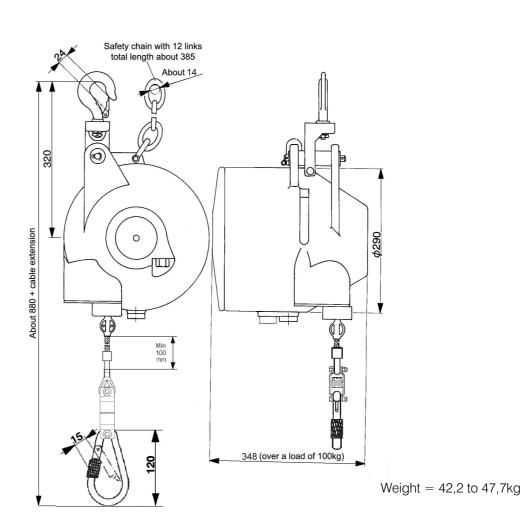

ROBOTIC WELDING MANUAL WELDING STATIONARY WELDING LASER WELDING LASER WELDING ARO CONTROLS ARO SYSTEMS ARO®Rebuild PARTS & COMPONENTS ARO Welding Technologies SAS 1, Avenue de Tours - BP 40161, 72500 Château du Loir, FRANCE T +33 (0)2 43 44 74 00 F +33 (0)2 43 44 74 01 E france@arotechnologies.com

The information contained within this brochure is deemed to be correct at the time of going to press. Due to the policy of continued improvement, we reserve the right to change any specification without prior notice. ERRORS & OMISSIONS EXCEPTED.



WELDING TECHNOLOGIES

www.arotechnologies.com