

Mark II series

64" - 162 cm LED UV Printers



i² Intelligent Interweaving UV drastically reduces banding and gloss banding effects



Automatically adjusts the drop throw distance, regardless of the thickness of the media loaded



US11 inks are Greenguard Gold certified for indoor applications including offices, classrooms and healthcare environments



Mutoh cool UV cure technology delivers low energy consumption and instant dry output



Mutoh VerteLith™ Clear Tone screening will produce the best possible gradients and skin tones



US11 inks are compliant with the European Standard on safety of toys EN 71-3 – part 3.



Low odour, non HAP inks - no air purifier needed. Fit for any working environment and interior décor prints



Mark II series

64" - 162 cm LED UV Printers

Shorten your production time, expand your range of applications and produce real **added value high quality graphics** with Mutoh's Japanese-made Mark II series **6-colour (C, M, Y, K, White, Clear)** printers.

Integrating two long-life UV LED lamps and two piezo print heads delivering **print resolutions up to 1440 x 1440 dpi**, these printers will deliver **instant dry output**, ready for application or post-treatment.

The Mark II series printers feature **new print modes and industry leading features** such as Mutoh's proprietary VerteLith™ Clear Tone screening, Intelligent Interweaving UV and DropMaster technologies.

Last but not least, the printers also come with Mutoh's new genuine VerteLith™ RIP software with advanced 6 channel support.

Unleash your creativity and discover numerous new applications. Add value with **white and clear inks** which enable printing on to transparent and non-white substrates, multi-layer graphics and spot varnish effects.

The Mark II series printers are ideally suited for the **production of high quality graphics:** in-store promotional prints & deco graphics, POP & retail graphics, floor & window prints, customised wall décor prints, stickers, sign blanks, exhibition graphics, fine art prints, packaging samples and more.

ValueJet 1638UR Mark II



Roll-to-Roll

Roll-to-Roll - 64" - 162 cm / Roll weights 30 kg, 40 kg or 100 kg

ValueJet 1638UH Mark II



Roll-to-Roll setup: 64" – 162 cm / Roll weights 30 kg or 40 kg Rigid setup: 64" – 162 cm / Thickness 15 mm – Weight 15 kg – Automated media thickness measurement

MARK II SERIES AT A GLANCE

- UV LED dual head, dual lamp 162 cm (64") wide printers
- C, M, Y, K LED UV inks, White & Varnish for a luxurious or specialty finish
- Print on white, transparent and non white substrates
- Instant dry output, ready for use or second stage treatment
- Energy efficient low heat generation, ideal for heat sensitive media
- Intelligent Interweaving i² UV and DropMaster integrated
- VerteLith™ Clear Tone screening delivers best possible gradients and skin tones
- Fit for regular offices, home based businesses or small retail environments
- Low odour, zero VOC inks no air purifier needed
- Excellent adhesion and scratch resistance
- US11 Greenguard Gold certified inks for indoor applications
- US11 inks : Toy Certification

















VerteLith™ - Genuine Mutoh RIP software

A complete 'in the box' print solution with advanced 6-channel support to effortlessly handle a broad range of print jobs, including multi-layer artwork requiring white and/or varnish layers.


The VerteLith™ software is built around the Harlequin host renderer, ensuring fast RIP processing times for both PDF and PostScript files, as well as perfect handling of transparencies and spot colours.


To avoid waste, the software includes powerful preview functionality, supporting soft proofing and on screen RIP previewing of the actual printed dots before printing.

By integrating halftone screening specifically developed for inkjet, Mutoh VerteLith™ 'Clear Tone' will produce the best possible gradients and skin tones.

To complete your starter software toolbox, VerteLith™ can also auto-generate white and/or varnish layers based on a selection of presets and it allows you to perform ink-cost calculation prior to printing.

Your output can be perfectly prepared for the next step in your production process via the finishing toolset, allowing you to perform flexible tiling and put crop marks or grommets.

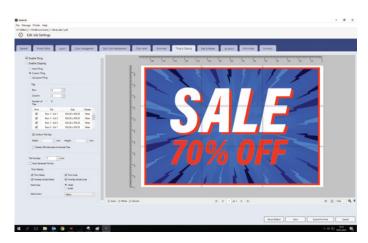

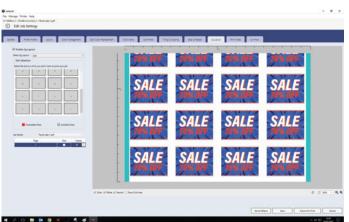







KEY SPECIFICATIONS

Value Jet 1638UR Mark II

Value Jet 1638UH Mark II

Print Technology Drop-on-demand Micro Piezo Inkjet Technology

Print Head 2 (staggered setup)

Nozzle Configuration 180 nozzles x 8 lines (each head)

Drop Mass Range (pl) 3.8 to 28

RIP Software Included. Mutoh's genuine VerteLith RIP with advanced 6 colour support.

PERFORMANCE	4C Ink set-up CMYK output 1 Layer ⁽³⁾	6C Ink set-up (CMYK+White+Varnish) CMYK output 1 Layer (3)
Applications for distance viewing (e.g. perforated film)	16.7 m ² /h	8.3 m ² /h
White media	3 - 12.8 m ² /h	1.4 - 6.4 m ² /h
Transparent or non-white media	3 - 12.8 m ² /h ⁽¹⁾	1.4 - 6.4 m ² /h ⁽²⁾

(1) Some media have embedded UV blockers. These reduce lamp efficiency and may require more passes to allow more UV dose.

(2) In 6C set-up a layer of white can be added to improve the colour power on transparent and non-white substrates. Adding extra layers of White and/or Varnish reduces the output speed

(3) Various output resolutions are available: 360 x 1080 dpi, 720 x 720 dpi, 720 x 1080 dpi, 720 x 1440 dpi and 1440 x 1440 dpi

MEDIA SPECIFICATIONS Valuedet 1638UR Mark II Valuedet 1638UH Mark II

Min./Max. Media Width - Max. Print Width 182 mm (7.17") / 1625 mm (63,97") - 1615 mm (63,58")

Head Heights / Max. Media Thickness 1.5 mm (low) / 0.3 mm - 2.5 mm (high) / 1.3 mm Automatic (1) / 15 mm

(1) Media thickness is measured electronically and head height is automatically adjusted

Media Measurements ⁽²⁾ Ø 150 mm / 2" & 3" / 30 kg

(2) Standard non-motorised roll-off system

Take-up Systems 30 ⁽³⁾, 40 and 100 kg 30 ⁽³⁾ and 40 kg

(3) During printing with UV ink, standard rolls increase in diameter and weight versus roll-off side. To handle full rolls, select the 40 kg winder (max. diameter 250 mm).

Min. / Max. Recommended Media Length Rigids / 200 mm (7.87") / 1200 mm (47.24")

Max. Media Weight Rigids / 15 kg

INK SPECIFICATIONS

Ink Types	LED UV inks - Rigid (UH21 - 1638UH2) and Flexible (US11 - 1638UR2 & 1638UH2) types
Ink Colours / Volume	CMYK + Varnish : 220 ml cassette / 800 ml pack $^{(1)}$, White : 220 ml cassette / 500 ml pack $^{(1)}$
(1) 800 ml / 500 ml pack requires optional adapter	
Ink Setup	CMYK (CCMMYYKK), CMYK + Varnish (CMYK+2xVa+2xClean) or CMYK + White + Varnish (CMYK+2xWh+2xVa)
Compatibility	ABS, Aluminium board, Cardboard, Fluted & corrugated boards, Glass, heat sensitive flex media like Polyole-
	fin-based (PVC-Free) self-adhesive films, Non-woven, PC, PE, PET, PES, PMMA (extruded), PP, PS, PVC (2)
(2) Ink adhesion will vary among media type and brand. Ind	ividual testing is required in function of your specific application.

Ink Drying System 2 Long life LED UV curing lamps (LED UV Lamp Life : 7.600 hours)

VJ-1638UR2 MACHINE MEASUREMENTS

Width x Depth x Height 2983 x 818 x 1261 mm

Weight 189 kg (152 kg printer + 37 kg stand)

VJ-1638UH2 MACHINE MEASUREMENTS

Width x Depth x Height 2983 x 818 x 1261 mm (roll)

2983 x 2730 x 1261 mm (rigid)

Weight 197 kg (160 kg printer + 37 kg stand)



Watch movie on Mutoh Europe's YouTube channel





© MUTOH Europe nv. All rights reserved. Rev 1.0 – 01/2021. Specifications are subject to change.

The machines depicted on this brochure do not necessarily show a standard configuration. All trademarks mentioned are property of their respective owners.