



### RP-W719

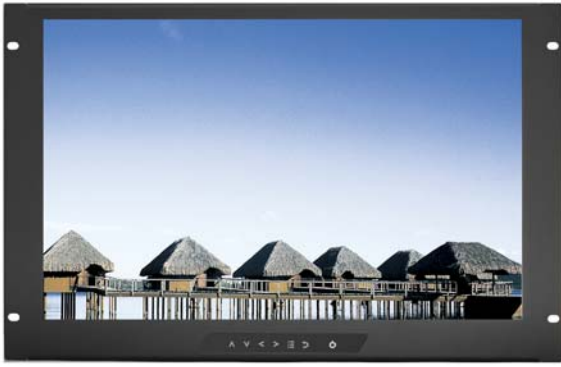

### Display Features & Benefits

- ▶ 7U rackmount 19" widescreen LCD with DVI-D / VGA input
- ▶ 1440 x 900 high resolution
- ▶ Ideal for CCTV security & industrial control

### Options

- 3G / HD / SD-SDI Broadcast-grade input
- MCS Multi-display control solution
- W19" Touchscreen : Capacitive, Resistive
- S-Video + Composite ( BNC ) or Audio input
- HDMI or DVI-D ( either one for AV2.2 upgrade )
- DC power : 12V / 24V / 48V / 110 ~ 125V
- MIL-type or lockable connector

**Basic I/O** : DVI-D + VGA

**AV2.2D upgrade** : DVI-D + VGA + BNC + S-Video + audio

**AV2.2H upgrade** : HDMI + VGA + BNC + S-Video + audio

**AV3.0 upgrade** : HDMI + DVI-D + VGA + BNC + S-Video + audio

**Options** : USB for touchscreen & DC power

SDI ( AV3.0 upgrade required )

### Specifications

#### • LCD Panel

Manufacturer :	
Size (diagonal) :	19" widescreen TFT
Max resolution :	1440 x 900
Brightness (cd/m2) :	300
Backlight :	CCFL
Colors :	16.7M
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	160° x 160°
Active area (mm) :	408 x 255
MTBF (hrs) :	50,000
Signal input :	VGA or DVI-D

#### • Weight

Net :	5.8 kgs ( 12.8 lbs )
Gross :	7.9 kgs ( 17.4 lbs )

#### • Environmental

Operating :	0 to 50°C Degree
Storage :	-5 to 60°C Degree
Relative humidity :	5~90%, non-condensing
Shock :	10G acceleration ( 11 ms duration )
Vibration :	5~500Hz 1G RMS random vibration

#### • Casing Color :

Black ( RAL 9005 )

#### • Regulatory

Safety :	FCC & CE certified
Environmental	RoHS2 & REACH compliant

#### • Power

Input :	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption :	Max. 48 Watt, Standby 5 Watt

#### • Dimensions

Product :	480 x 58 x 310 mm / 18.9 x 2.3 x 12.2 inch
Packing :	529 x 124 x 495 mm / 20.8 x 4.9 x 19.5 inch

### Diagrams ( mm )

