
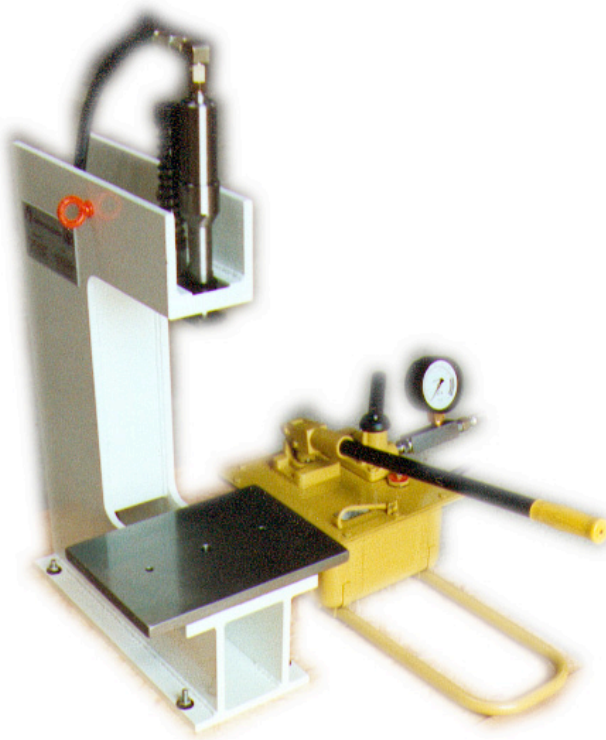


Utilisation :

Poinçonnage-Sertissage-Marquage-Rivetage-
Pliage-Emmanchement-Assemblage-Etc...

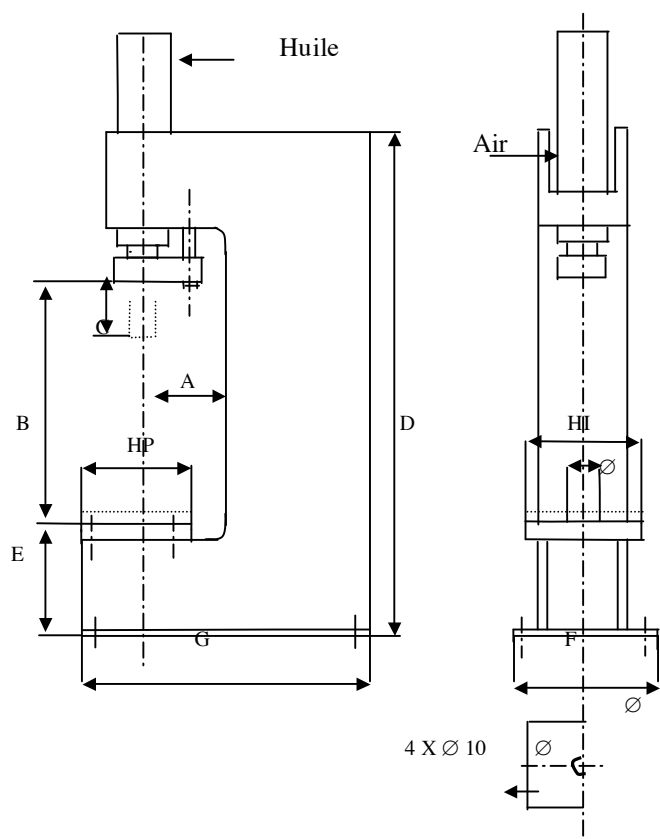

- Options :**
- Outillage
 - Bâti spécifique
 - Manomètre
 - Capteurs efforts-course

CARACTERISTIQUES TECHNIQUES

TYPE	HEM 10-80	HEM 30-80	HEM 60-100	HEM 100-100	HEM250-100
Force KN	10	30	60	100	250
Course mm	80	80	100	100	100
Passage A	100	100	160	200	200
Passage B	150	170	200	250	250
Course C	80	80	100	100	100
D	400	460	660	920	1130
E	100	120	200	300	400
F	200	220	260	300	400
G	295	355	560	750	975
Hp	150	160	250	300	350
Hi	150	160	250	300	350
Ø	Ø 25 H7	Ø 25 H7	Ø 30 H7	Ø 30 H7	Ø 30 H7
Poids kgs	120	130	220	350	610

Pompe à main 2 voies 2 vitesses

A	B	C	D	E	G	H	J	K	L	M	N	P	R	S
212	307	163	320	3/8	195	674	25	74°	266	175	650	88	157	80



ZI de la bézardière

41200 Villefranche sur cher

Tél : 02 54 96 41 45

Fax : 02 54 96 89 03

<http://villemeca.com>