

# TRUSS SCREED


RAZORBACK® ENGINE & AIR DRIVEN SCREED



## STEEL ENGINE DRIVEN TRUSS SCREED

The Allen® Razorback® Truss Screed is the contractor's preferred brand when high tolerance  $F_L$  Numbers are specified on concrete floors and pavements. For more than 40 years, Allen Truss Screeds have set the industry's standard for precision levelness, rigidity and durability.

**SE12**

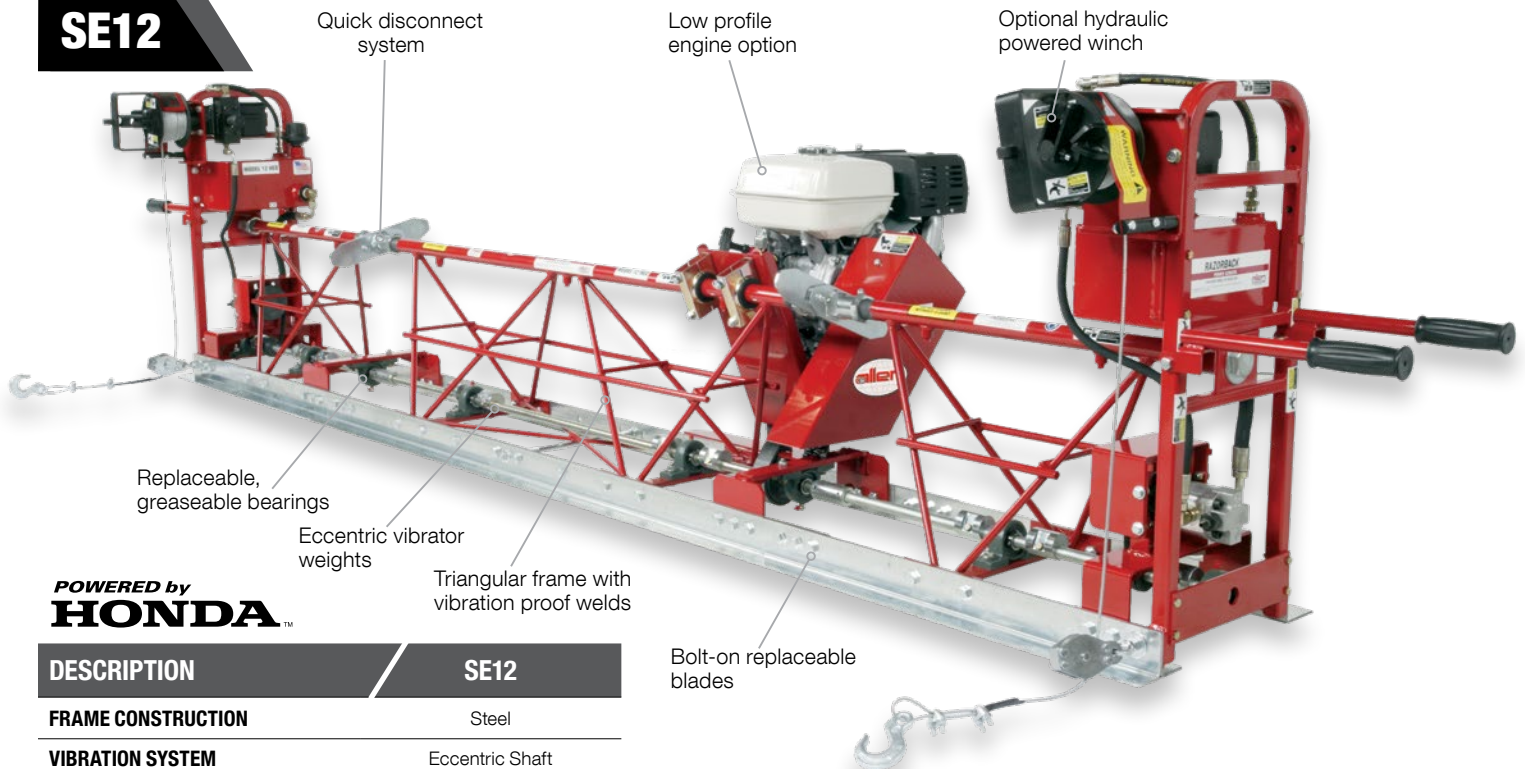

POWERED by  
**HONDA**™

### DESCRIPTION

**SE12**

#### FRAME CONSTRUCTION

Steel

#### VIBRATION SYSTEM

Eccentric Shaft

#### ENGINE (WIDTHS LESS THAN 50')

Honda GX270 - 9 hp (6.7 kW)

#### ENGINE (WIDTHS MORE THAN 50')

Honda GX340 - 11 hp (8.2 kW)

#### SECTION LENGTHS / WEIGHTS

2 FT (.61 M) 37 lb (17 kg)

2.5 FT (.76 M) 46 lb (20 kg)

5 FT (1.5 M) 90 lb (41 kg)

7.5 FT (2.3 M) 135 lb (61 kg)

10 FT (3.1 M) 180 lb (82 kg)

#### MAXIMUM WIDTH

65 ft (19.8 m)

#### LOWEST CONCRETE SLUMP

3 in (7.6 cm)

#### MAXIMUM CONSOLIDATION DEPTH

10 in (25.4 cm)

#### BLADES

10 Gauge  
Galvanized Steel



# CONTRACTOR TOUGH

SITE PREP • PLACING • FINISHING • PAVING EQUIPMENT

# TRUSS SCREED

## STEEL AIR VIBRATION TRUSS SCREED

Our air-driven screeds feature precision engineered naval bronze piston vibrators that are rust resistant, non-sticking and free-starting.

DESCRIPTION	SA12
FRAME CONSTRUCTION	Steel
VIBRATION SYSTEM	Dual Air
SECTION LENGTHS / WEIGHTS	
2 FT (.61 M)	37 lb (17 kg)
2.5 FT (.76 M)	47 lb (21 kg)
5 FT (1.5 M)	93 lb (42 kg)
7.5 FT (2.3 M)	138 lb (63 kg)
10 FT (3.1 M)	186 lb (84 kg)
MAXIMUM WIDTH	65 ft (19.8 m)
LOWEST CONCRETE SLUMP	2 in (5.1 cm)
MAXIMUM CONSOLIDATION DEPTH	12 in (30.5 cm)
BLADES	10 Gauge Galvanized Steel



## ALUMINUM ENGINE DRIVEN TRUSS SCREED

A lighter weight, extremely portable version of our legendary steel screeds, the engine-driven aluminum truss screed is perfect for the pickup truck portability to job-sites.

DESCRIPTION	AE12
FRAME CONSTRUCTION	Aluminum
VIBRATION SYSTEM	Eccentric Shaft
ENGINE (WIDTHS LESS THAN 50')	Honda GX270 - 9 hp (6.7 kW)
ENGINE (WIDTHS MORE THAN 50')	Honda GX340 - 11 hp (8.2 kW)
SECTION LENGTHS / WEIGHTS	
2 FT (.61 M)	24 lb (11 kg)
2.5 FT (.76 M)	34 lb (15 kg)
5 FT (1.5 M)	60 lb (27 kg)
7.5 FT (2.3 M)	90 lb (41 kg)
MAXIMUM WIDTH	50 ft (15.2 m)
LOWEST CONCRETE SLUMP	4 in (10.2 cm)
MAXIMUM CONSOLIDATION DEPTH	6 in (15.2 cm)
BLADES	12 Gauge Galvanized Steel



PARAGOULD, AR 72450 USA // WWW.ALLENENG.COM  
800.643.0095 (USA ONLY) // 870.236.7751

**allen**  
ENGINEERING  
CORPORATION