

EPTT5100

- Combined pressure and temperature measurement
- High strength, rugged stainless steel design
- Competitively priced

The **EPTT5100** is a high quality all stainless steel combined pressure and temperature transducer, intended for use in the measurement of gases and liquids compatible with stainless steel.

The **EPTT5100** offers the combination of the well proven EPT3100 motor sport pressure transducer with the latest integrated temperature measurement technology.

With additional EMI / RFI protection, low static and thermal errors and high resistance to shock and vibration as standard, the **EPTT5100** assures trouble free operation at temperatures up to 125°C.

The **EPTT5100** strain gauge sensing element coupled with the latest ASIC circuitry, assures excellent accuracy, choice of high level outputs and long stability, protected within a rugged, stainless steel housing.

The **EPTT5100** high strength stainless steel construction contains no silicone oil and no internal O-rings and provides therefore excellent reliability which is backed by a one-year warranty.



Specification

Performance	
Pressure:	
Accuracy @ RT	< +/-0.8%
Stability (1 Year)	< ± 0.1 %
Overrange pressure	up to 4x rated pressure
Burst pressure	up to 6x rated pressure
Pressure cycles	> 10 million
Pressure response time:	<1ms
Temperature:	
Temperature range	-50 to +150°C linear output
Accuracy	< ± 0.8 %
Non Linearity	<1%
Temperature response time:	<120s
Environment	
Temperature	-40° to 125°C
Shock	1000 G, 11 msec., 1/2 Sine
Vibration	25 G peak, 20 to 2000 Hz
Sealing	IP 66

Electronics	
Excitation for output pressure:	5 VDC for 0.5 – 4.5 V output, 10 - 32 VDC for 0 - 5 V output 12 - 32 VDC for 0 – 10V output
Output temperature	0.25..4.75 VDC
Current consumption	< 10 mA
Reverse voltage protection	Yes
Mechanics	
Housing	304 stainless steel
Wetted parts	17-4PH stainless steel
Pressure port	see select table
Electrical connection	see select table
Weight	ca. 60 g

PITCH TECHNOLOGIES

Votre contact VARIOHM en France
☎ 01 34 85 54 68

🌐 <https://pitch-technologies.fr>
✉ info@pitch-technologies.fr

EPTT5100

Ordering Information

(Please use the characters in the chart below to construct your product code)

Sample Code: EPTT5100 - M10 - 01000 - B - 4 - A

Series	Port Configuration	Measurement Range	Pressure Unit	Output Signal	Electrical Interface
EPTT5100	M10 - M10 x 1 B-1/4" NPT G14A - G1/4" A G14B - G1/4" B U72M -7/16"-20 UNF-2A U72C -7/16"-20 UNF-2AC H- 3/8x24UNF Dash 3 Male	The sensor is available up to 1000 Bar (Temperature: -50 to +150°C linear output)	B - gauge pressure	1 = 0 - 10 VDC 4 = 0..5 V 5 = 0.5..4,5 V ratiometric	A - 600 mm cable F - M12 x 1

Custom options available on request



Pressure Range	
Bar	0.6 1.0 1.6 2.5 4 6 10 16 25 40 60 100 160 250 400 600 1000
Order Code	00060 00100 00160 00250 00400 00600 01000 01600 02500 04000 06000 10000 16000 25000 40000 60000 100000

The EPTT5100 series is backed by a 1 Year Warranty. The purchaser is responsible for compatibility of the media, functional adequacy and correct installation of the transmitter.

Dimensions / Electrical interface

M12 connector

Cable output




Jacketed cable
600 mm long
Ø 4.5 mm

Electrical Connections

Connector M12x1 5-Pin


Cable output



- 1: + Supply
- 2: Not connected
- 3: - Supply
- 4: Output Pressure
- 5: Output Temperature

- red: + Supply
- black: - Supply
- white: Output Pressure
- green: Output Temperature
- white /blue: Not connected

Pressure and temperature output

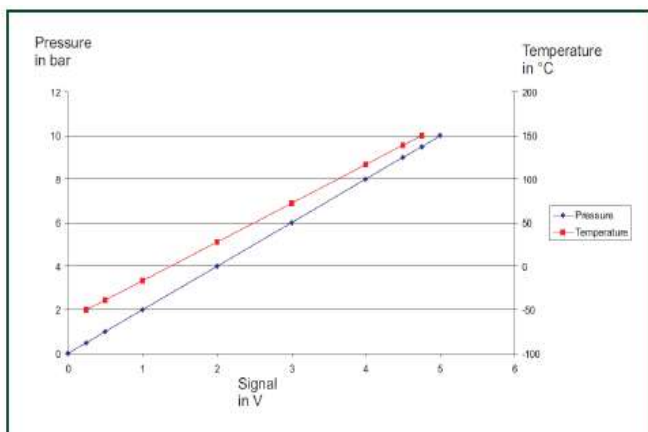

PITCH TECHNOLOGIES

Votre contact VARIOHM en France
☎ 01 34 85 54 68

🌐 <https://pitch-technologies.fr>
✉ info@pitch-technologies.fr