
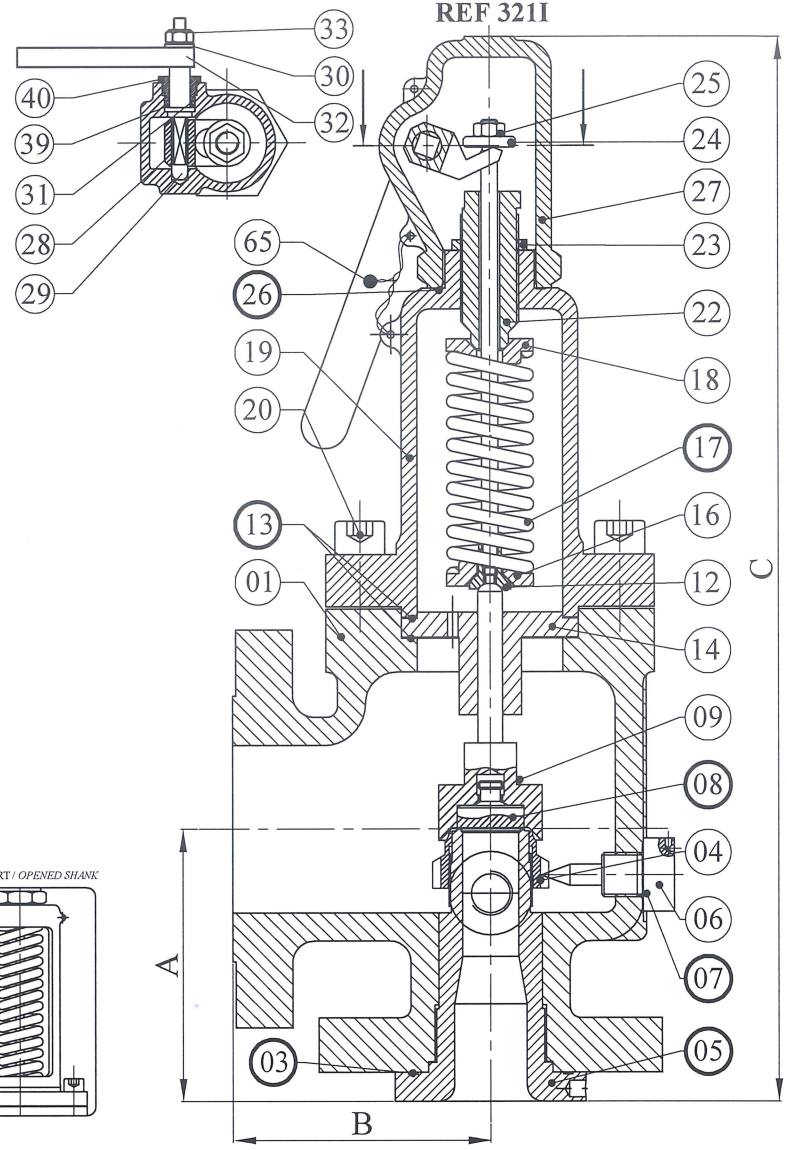




Rp	Nb	DESIGNATION		MATIERE/MATERIAL
01	1	CORPS	BODY	1.4408/CF8M
02	1	BOUCHON DE PURGE	DRAIN PLUG	INOX/STAINLESS STEEL
03	1	JOINT	GASKET	PTFE
04	1	BAGUE DE REGLAGE	ADJUSTING RING	1.4408/CF8M
05	1	BUSE	NOZZLE	1.4404/AISI 316L
06	1	VIS DE BLOCAGE	SCREW	1.4404/AISI 316L
07	1	JOINT	GASKET	PTFE
08	1	CLAPET	DISC	1.4404/AISI 316L
09	1	PORTE DE CLAPET	DISC HOLDER	1.4404/AISI 316L
12	1	TIGE	STEM	1.4404/AISI 316L
13	2	JOINT DE CORPS	BODY GASKET	PTFE
14	1	GUIDE TIGE	STEM GUIDE	1.4404/AISI 316L
16	1	COUPELLE INFERIEURE	UNDER SPRING PLATE	1.4404/AISI 316L
17	1	RESSORT	SPRING	1.4310/ AISI 302
18	1	COUPELLE SUPERIEURE	UPPER SPRING PLATE	1.4404/AISI 316L
19	1	FUT	SHANK	1.4408/CF8M
20		VIS DE CORPS	BODY SCREW	A2-70/INOX/STAINLESS STEEL
22	1	VIS DE REGLAGE	ADJUSTMENT SCREW	1.4404/AISI 316L
23	1	C-ECROU VIS DE REGLAGE	LOCK NUT	1.4404/AISI 316L
24	1	COUPELLE TIGE	TAPPING PLATE	1.4404/AISI 316L
25	1	ECROU	NUT	A2-70/INOX/STAINLESS STEEL
26	1	JOINT DE BOUCHON	PLUG GASKET	PTFE
27	1	BOUCHON	PLUG	311: 1.4404/AISI 316L / 321: 1.4408/CF8M
28	1	FOURCHETTE	FORK	1.4404/AISI 316L
29	1	AXE	PIN	1.4404/AISI 316L
30	1	RONDELLE	WASHER	A2/INOX/STAINLESS STEEL
31		GARNITURE	GLAND PACKING	PTFE
32	1	LEVIER	LEVER	INOX/STAINLESS STEEL
33	1	ECROU D'AXE	NUT	A2-70/INOX/STAINLESS STEEL
39	1	BAGUE DE FOND	RING	1.4404/AISI 316L
40	1	FOULOIR PRESSE ETOUPE	GLAND	1.4404/AISI 316L
55	1	ECROU	NUT	A2-70/INOX/STAINLESS STEEL
56	1	VIS DE BLOCAGE	BLOCKING SCREW	A2-70/INOX/STAINLESS STEEL
65		PLOMBAGE	PLUMBING	

* AUTRES CONDITIONS DE SERVICE, RACCORDEMENTS ET MATERIAUX SUR DEMANDE.
 * OTHER WORKING CONDITIONS, CONNECTIONS AND MATERIALS ON REQUEST
 -LES PORTEES DES BUSES ET CLAPETS DES SOUPAPES API CL600 SONT STELLITEES.
 - EVERY NOZZLE & DISC SEAT, IN ANY ORIFICE CL600 ARE STELLITEES

	ORIFICE ORIFICE (Cm2)	* ENTREE / INLET						SORTIE/OUTLET	A	B	C SELON P.d.o. According to set pressure	MASSE MASS (Kg)		
		P.D.O (barg) MAX MAX SET PRESSURE à 20°C			P.D.O (barg) MAX MAX SET PRESSURE à 20°C									
		Class											PN	
		150	300	LT	300	600	PN 16						PN 40	
1 D 2	0.71	19	19	49.6	99.3	12.6	31.5	Class 150/PN 16 CN 300 POSSIBLE	104.8	114.3	425	22		
1 E 2	1.26	19	19	49.6	99.3	12.6	31.5		104.8	114.3	425	22		
1 .1/2F 2	1.98	19	19			12.6			123.8	120.7	490	550	30	
1 .1/2F 2	1.98			49.6	99.3		31.5		123.8	152.4	490	550	33	
1 .1/2G 3	3.24	19	19			12.6			123.8	120.7	490	550	30	
1 .1/2G 3	3.24			49.6	99.3		31.5		123.8	152.4	490	550	33	
1 .1/2H 3	5.06	19	19			12.6			130.2	123.8	550	560	33	

VARIANTES OTHER POSSIBILITIES

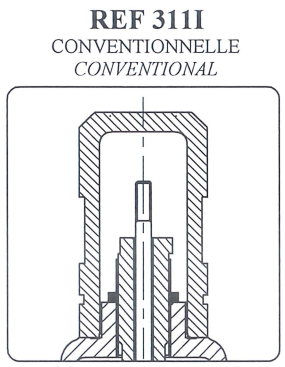

PIECES DE REMPLACEMENT CONSEILLEES
RECOMMENDED SPARE PARTS

CE DOCUMENT PEUT ETRE MODIFIE SANS AVIS PREALABLE
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

F	13/08/18	MISE A JOUR / UP DATING	OZIL	SCHMUNCK
H+ VALVES	SOUPAPE DE SURETE - H+FLOW SAFETY RELIEF VALVE - H+FLOW		33211I	
559, rue des Vergers F-69480-POMMIERS Tél: 33 (0)4 28.39.20.00 Fax: 33 (0)4 28.39.20.01 www.hvalves.fr		A P I - TYPE 3 I		
DN 1" - 1.1/2" - CLASS 150/600 - PN40/16				