

- Designed for operator ease of use
- Space saving design
- Patented single motor drive

This is a two station positioner for workpieces that require rotation about one axis. It has been designed for operator ease of use, with a suitable working height for loading/unloading the fixtures, and is delivered complete with an anti-glare shield.

The RM2-series has a space saving design due to its vertical station changing, and a patented single motor drive.

Available accessories

- Slip ring device
- Controlled air
- Fixture brackets


Technical data		RM2-250 STN	RM2-500 STN
Maximum payload, per station	kg	250	500
Welding capacity, 100 % duty cycle	A	700	700
Welding capacity, 60 % duty cycle	A	920	920
Distance between fixture plates (A)	mm	1600, 2000, 2636, 3000	1600, 2000, 2636, 3000
Total length (B)	mm	A + 1645	A + 1818
Maximum fixture's width, diameter (D)	mm	1170	1350
Air channels		2 x ¼"	2 x ¼"
<i>Index axis</i>			
Index time ¹⁾	sec	4	7
<i>Rotating axis</i>			
Torque, dynamic	Nm	1197	1197
Torque, static	Nm	957	957
Rated speed	rpm	0-16.8	0-16.8
Rated offset from the center of gravity (COG)	mm	390	194

¹⁾ Including the 180° rotating of the fixture


RM2...STN

One axis positioner
2-station

RM2-250 STN

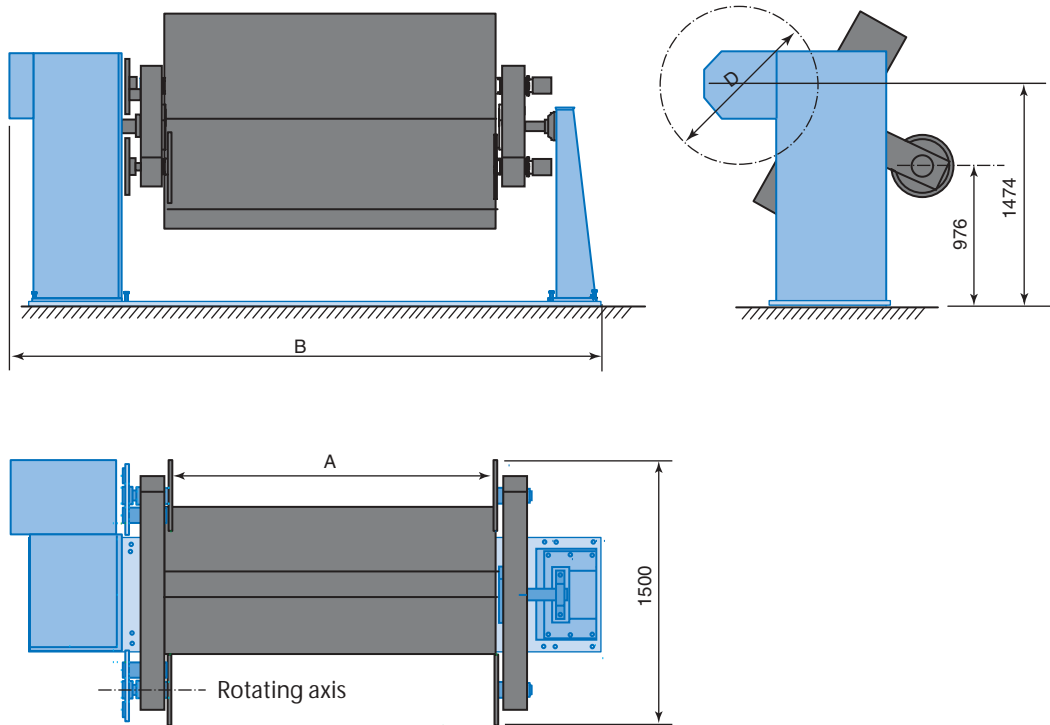

RM2-500 STN

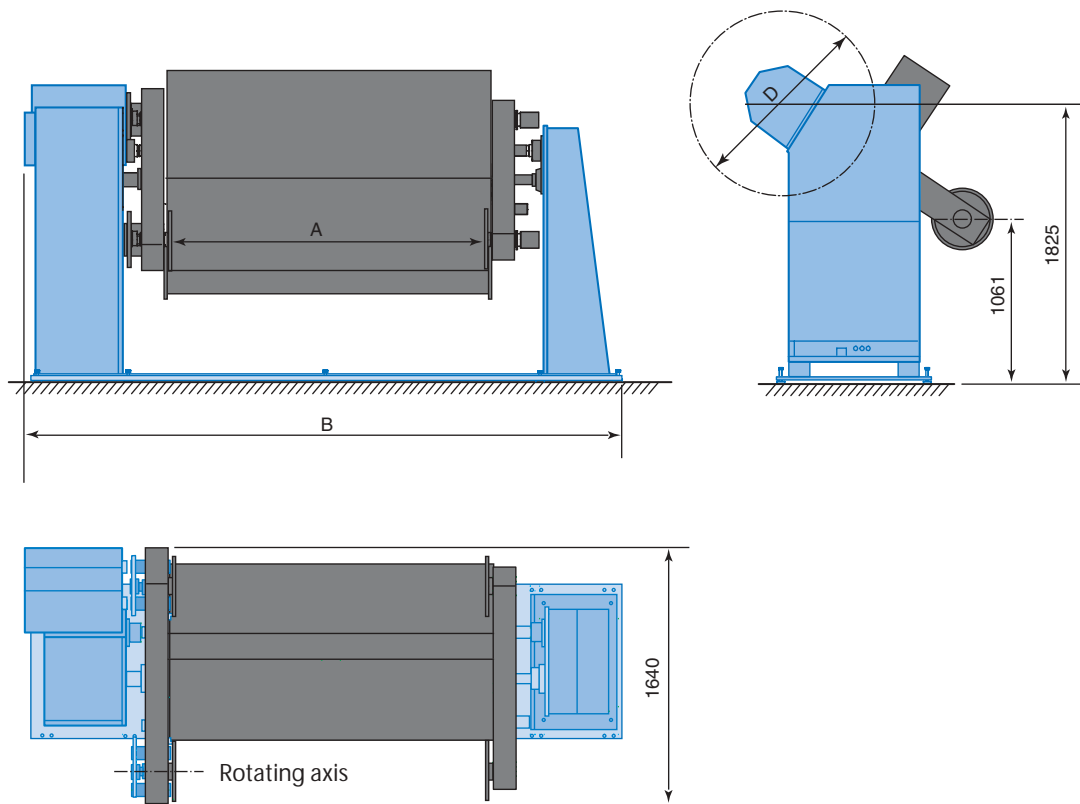

Technical data may be subject to change without previous notice
© MOTOMAN Robotics Europe AB - Reg. No. 1023EN-00 - 2007-09