

# mini10 PA-3122

# METPOS<sup>®</sup>

The One-of-a-kind Highly Integrated Fanless 10.4" POS Terminal



## Features

- Intel® Celeron® J1900 CPU
- 10.4" LCD display with touch
- Flexible design for versatile applications
- Optional 2"/3" easy loading thermal printer
- Optional MSR, i-Button & Fingerprint & RFID
- Small footprint and Streamline design




## Specifications

System	CPU Support	Intel® Celeron® J1900 CPU
	Memory	DDR3L SO-DIMM (1 slot, up to 8GB)
	Network	10/100/1000 Base-T Fast Ethernet
	Power Supply	72~120Watt Power Adapter
	Audio	2W Speaker
	System Weight	with power adaptor approx. 4.5kg
	Dimension	300 x 299 x 135 mm
	O.S. Support	WIN8 / POSReady7
Storage	SATA	1 x 2.5" HDD or SSD
	mSATA	1 x SSD
I/O Ports	USB	4 x USB on rear, 1 x USB on side bezel
	Serial Port	3 + 1(option) x DB9 (+5V/ 12V selectable)
	LAN	1 x RJ45
	VGA	1 x DB15
	Line Out	1 x phone jack
	Cash Drawer	1 + 1(option, with Y cable) x RJ11 (+12V or +24V selectable)
	DC-in	1 x 4pin DC Power Jack
	LPT	1 x DB25(option)
Peripheral	Customer Display	VFD kit, 20 columns and 2 lines, each column is 5 x 7 dots
	Printer	2" or 3" easy loading thermal printer with Auto cutter
	MSR & iButton	ISO I,II,III; JIS I,II and support information key
	RFID	ISO14443A Read /Write; ISO18092 Read only
	Fingerprint	8-bit grayscale, reader
Display	LCD	10.4" TFT LCD
	Max. Resolution	1024x768 /800x600
	Brightness	400 /230 cd/m <sup>2</sup>
	Touch Screen	5-wire Analog resistive
	Tilt Angle	24 ~ 30 degrees
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0 ~ 35° C
	Storage Temp.	-5 ~ 60° C
	Humidity	20 ~ 90%


Metpos GmbH  
 Telefon: +49 (0) 2302 282 36 0  
 Telefax: +49 (0) 2302 282 36 23

Wullener Feld 61  
 D-58454 Witten  
 Germany

[www.metpos.de](http://www.metpos.de)  
 E-Mail: [info\(at\)metpos.de](mailto:info(at)metpos.de)

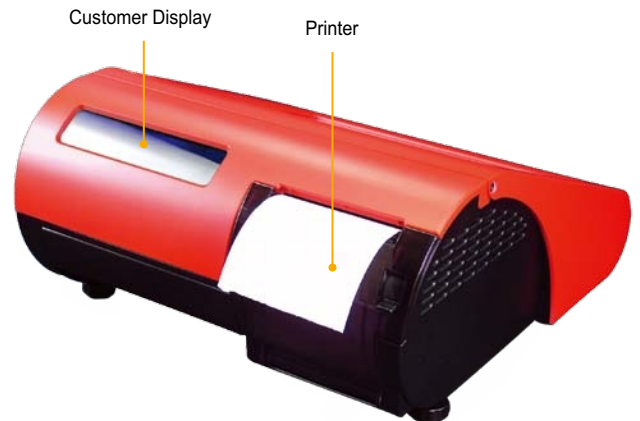

## System I/O Ports

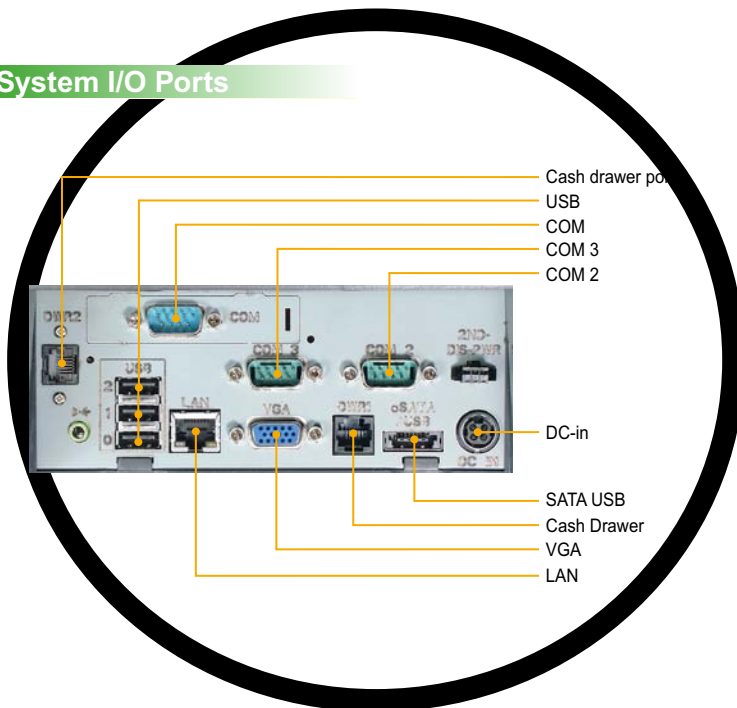

## Ordering Information

Order No	Description
PA-3122RC-A0B	PA-3122 barebone, Intel® Celeron® J1900 10.4" POS /black /1024x768 LED Backlight , Resistance TouchScreen
PA-3122RZ-21A	DDR3L 2GB memory/ 2.5" HDD
PA-3100RZ-33A	Embedded MSR, PS2 interface
PA-3122RZ-51B	Embedded VFD module, RS232 interface
PA-3122RZ-42B	Embedded 3" Thermal Printer, USB interface
52-002-02012001	120 Watt Power Adaptor

## Applications

- Hospitality
- Retail
- Replacement of ECR

## Dimensions

