
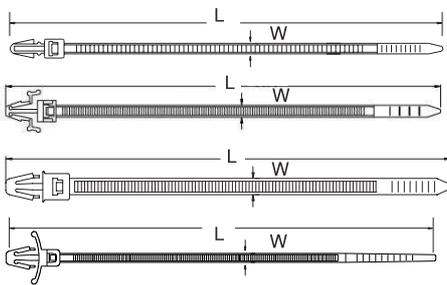


Push Mount Tie

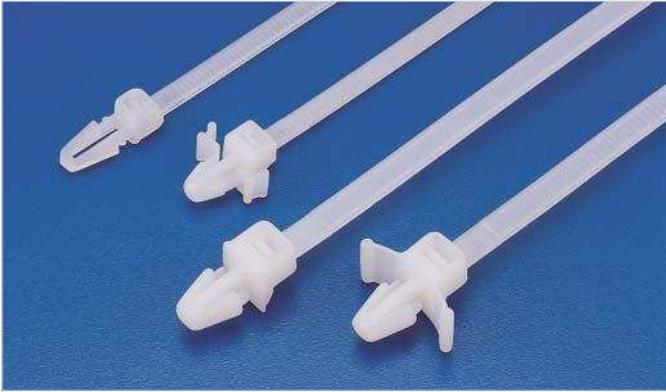


PCV

PFV

PSV


PWV



Material: UL approved NYLON 66, 94V-2. Press the tie into a pre-drilled hole simple and secure one-piece harness tying and mounting.

Part N°	Dimensions		ØMax. Bundle mm.	Max. Tensile Strength Kg.	Mounting Hole
	L	W mm.			
PCVS-130	130	4.8	30	22	4.8
PCV-155	155	3.5	40	18	4.8
PCVS-200	203	4.8	50	22	4.8
PCV-200	203	4.8	50	22	6.4
PFVS-130	130	3.5	30	18	4.8
PFVS-200	200	3.5	50	18	4.8
PSV-130	130	4.8	30	22	6.4
PSV-200	200	4.8	50	22	6.4
PWVS-100	112	2.5	25	8	4.0
PWVS-155	155	3.5	36	18	4.0
PWV-130	130	4.8	30	22	6.0
PWV-200	200	4.8	50	22	6.0


Cable Tray Fixing Tie



Material: UL approved NYLON 66, 94V-2. This simple, neat tie provides a permanent answer to the problem of fixing cables to cable trays. The one-piece all plastic moulding in tough, flexible Nylon 66, snaps apart to slot into cable trays. Colour: Black.

Part N°	Dimensions mm.				Max. Tensile Strength Kg.	
	L	L1	L2	W		
CTF-320	320	39	279	7.6	55	100

Nylon Cable Tie with Stopper



Material: UL approved NYLON 66, 94V-2

Part N°	Dimensions		Max. Tensile Strength Kg.		
	L	W mm.			
CVS-190	190	4.8	45	22	100