








SWEEPER WITH COLLECTION BUCKET



TECHNICAL SPECIFICATION

| Model | | SP 110 | SW 125 SWH 125 | SW 140 SWH 140 | SW 155 SWH 155 | SW168 SWH 168 | SW 180 SWH 180 | SW 210 SWH 210 | |
|---|---|-------------|-------------------|-------------------|-------------------|------------------|-------------------|-------------------|-----|
| Working width | mm | 1100 | 1250 | 1400 | 1550 | 1680 | 1800 | 2100 | |
| Overall width | mm | 1210 | 1360 | 1510 | 1660 | 1790 | 1910 | 2210 | |
| Oil flow, min-max | lt/min | 20 - 30 | 25 - 35 | 30 - 40 | | 35 - 50 | | 50 - 90 | |
| Oil pressure, min-max | bar | 140 - 175 | 160 - 240 | | | | | 180 - 240 | |
| Weight mod. SW/SWH standard configuration | kg | 215 | 275 | 310 | 350 | 375 | 395 | 485 | |
| Weight mod. SW standard configuration | kg | --- | 310 | 345 | 385 | 410 | 430 | 525 | |
| Broom material | replaceable polypropylene discs | | | | | | | | |
| Broom ring | Ø mm | 400 x n. 30 | 550 x n. 28 | 550 x n. 31 | 550 x n. 34 | 550 x n. 37 | 550 x n. 39 | 550 x n. 46 | |
| Gutter broom weight ⁽¹⁾ | kg | --- | 22 | 23 | | 24 | 25 | | |
| Best broom speed | rpm | 120 | | | | | | | |
| Collection bucket capacity | lt | 195 | 345 | 390 | 435 | 470 | 505 | 580 | |
| Water tank capacity ⁽¹⁾ | lt | 100 | | | | | | | |
|  | ton | 1,1 - 1,4 | 1,4 - 1,8 | 1,7 - 2,5 | 2,2 - 2,8 | 2,5 - 3,6 | 2,9 - 4,2 | 3,5 - 4,8 | |
|  | ton | --- | 1,5 - 2,5 | 2,2 - 3,0 | 2,8 - 3,8 | 3,4 - 4,8 | 4,0 - 5,2 | 4,6 - 5,5 | |
|  | ton | --- | --- | 2,8 - 3,5 | 3,1 - 3,8 | 3,5 - 4,2 | 4,0 - 5,0 | 4,5 - 5,2 | |
|  | ton | --- | --- | --- | --- | --- | 4,0 - 5,0 | 4,5 - 6,0 | |
| Overall size in standard configuration |  | A cm | 121 | 136 | 151 | 166 | 179 | 191 | 221 |
| | | B cm | 47 | 60 | 60 | 60 | 60 | 60 | 60 |
| | | C cm | 106 | 140 | 140 | 140 | 140 | 140 | 140 |


⁽¹⁾ On request

Mod. SP 110 hydraulic motor with chain transmission.

Mod. SW/SWH hydraulic motor direct engaging with broom shaft to avoid transmission wear.

Collection bucket with **scrape blade in anti wear steel, bolted and reversible.**

Mod. SWH strong steel wheels reduce bucket bottom wear.

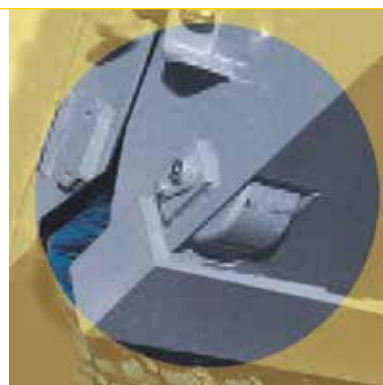

G.F. Gordini srl

Via E. Mattei, 4 - 48012 Bagnacavallo RA - Italy

tel. +39 0545 62712 fax +39 0545 62140

info@gfgordini.com - www.gfgordini.com

ACCESSORI PER MACCHINE OPERATRICI

Data, descriptions and images of this document are not binding hence GF Gordini reserves the right to alter part or all of them at any time with no notice.