


DS-2CD2610F-I(S) (1.3MP)

DS-2CD2620F-I(S) (2.0MP)

VF IR Bullet Network Camera



* Product picture and technical specs subject to change without previous notice.
For further information, please contact our local sales representatives.

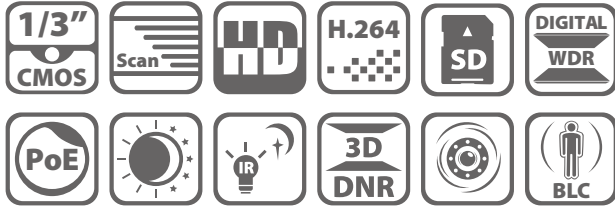

Key features

- 1.3MP/2MP high resolution
- HD real-time video
- Vari-focal lens
- IR LEDs (up to 30m)
- DWDR & 3D DNR & BLC
- IP66
- Onboard storage (up to 64GB)
- (-S) Audio I/O, Alarm I/O

Dimensions

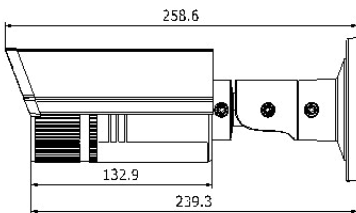

Unit: mm

Available model

DS-2CD2610F-I(S) (1.3MP)

DS-2CD2620F-I(S) (2.0MP)

	DS-2CD2610F-I (S)	DS-2CD2620F-I (S)
Camera		
Image sensor	1/3" progressive scan CMOS	
Min. illumination	0.01 lux @F1.2, AGC ON, 0.014 lux@F1.4, AGC ON, 0 lux with IR	0.07 lux @F1.2, AGC ON, 0.1 lux@F1.4, AGC ON, 0 lux with IR
Shutter time	1/3s ~ 1/100,100s	
Lens	2.8 ~ 12 mm @F1.4, angle of view: 105.2°~31.9°	2.8 ~ 12 mm @F1.4, angle of view: 91.2°~28.3°
Lens mount	Φ14	
Day & night	ICR	
Digital noise reduction	3D DNR	
Wide dynamic range	Digital WDR	
Backlight compensation	Yes, zone configurable	
Compression Standard		
Video compression	H.264 / MJPEG	
H.264 codec profile	Main profile	
Bit rate	32 Kbps ~ 16 Mbps	
Audio compression (-S)	G.711 / G.726 / MP2L2	
Audio bit rate (-S)	64 Kbps (G.711) / 16 Kbps (G.726) / 32-128 Kbps (MP2L2)	
Image		
Max. Image Resolution	1280 x 960	1920 x 1080
Frame rate	50Hz: 25fps (1280 x 960), 25fps (1280 x 720) 60Hz: 30fps (1280 x 960), 30fps (1280 x 720)	50Hz: 25fps (1920 x 1080), 25fps (1280 x 720) 60Hz: 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast, sharpness adjustable through client software or web browser	
Network		
Network storage	NAS	
Alarm trigger	Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage full, Storage error	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour	
System compatibility	ONVIF, PSIA, CGI	
General functionalities	User authentication, watermark, dual stream	
Interface		
Communication interface	1 RJ45 10 M / 100 M Ethernet port	
Onboard storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB	
General		
Operating conditions	-30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing)	
Power supply	12 VDC ± 10% , PoE (802.3af)	
Power consumption	Max. 5.5W (7.5W with ICR on)	
Ingress protection level	IP66	
IR range	Up to 30m	
Dimensions	95 x 105 x 258.6 mm	
Weight	1200g	