



RKP7 / 9 Single Console

Drawer Features & Display Benefits

- ▶ 1U 17" or 19" LCD console drawer
- ▶ 104-key keyboard with a true optical mouse
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ Combo interface either PS/2 or USB for single console drawer

Options

- S-Video + Composite (BNC) & Audio input
- HDMI or DVI-D (either one)
- DC power : 12V / 24V / 48V / 110 ~ 125V



Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	CCFL	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	160° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	50,000	30,000
Signal input :	VGA	VGA

• Casing Color :

Black (RAL 9005)

• Weight (Single console)

Net :	14.3 kgs (31.5 lbs)	15.3 kgs (33.7 lbs)
Gross :	19.1 kgs (42 lbs)	20.1 kgs (44.2 lbs)

• Environmental

Operating :	0 to 50°C Degree
Storage :	-5 to 60°C Degree
Relative humidity :	5~90%, non-condensing
Shock :	10G acceleration (11 ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Regulatory

Safety :	FCC & CE certified
Environmental	RoHS2 & REACH compliant

• Power

Input :	Auto-sensing 100 to 240VAC, 50 / 60Hz
Consumption :	Max. 48 Watt, Standby 5 Watt

• Product Dimensions (Single console)

RKP7 :	442 x 650 x 44 mm / 17.4 x 18.1 x 1.73 inch
RKP9 :	442 x 700 x 44 mm / 17.4 x 27.6 x 1.73 inch

• Packing Dimensions (Single console)

RKP7 :	595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch
RKP9 :	595 x 910 x 140 mm / 23.4 x 35.8 x 5.5 inch


Console Cable

CE-6

- 6 feet Combo KVM cable (bundle)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

G G keyboard

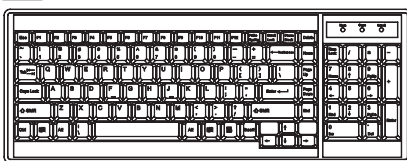

Supporting layouts

America					
	United States				
EMEA					
	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
	Asia				
	China	Japan	Korea	Arabia	Turkey



WOM-01
Wired mini USB optical mouse



WOM-02
Wireless USB optical mouse
(Option)



• **Product Dimensions (with KVM)**

RKP7 : 442 x 650 x 44 mm / 17.4 x 25.6 x 1.73 inch

RKP9 : 442 x 700 x 44 mm / 17.4 x 27.6 x 1.73 inch

• **Packing Dimensions (with KVM)**

RKP7 : 595 x 860 x 140 mm / 23.4 x 33.9 x 5.5 inch

RKP9 : 595 x 910 x 140 mm / 23.4 x 35.8 x 5.5 inch

• **Weight (Net / Gross)**

RKP7 : 14.7 kgs 21.1 kgs
(32.3 lbs) (46.4 lbs)

RKP9 : 16.3 kgs 21.5 kgs
(35.9 lbs) (47.3 lbs)

• **Casing Color :** Black (RAL 9005)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MUKVM-KIT.pdf

X stands for 17" or 19" LCD size.

Matrix Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	-	RKPX - MUIP1613	RKPX - MUIP3213
	1	1	2	-	RKPX - MUIP1624	RKPX - MUIP3224
	1	1	0	-	RKPX - MU1602	RKPX - MU3202
	1	2	0	-	RKPX - MU1603	RKPX - MU3203
	1	3	0	-	RKPX - MU1604	RKPX - MU3204

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-UKVM-KIT.pdf

Combo Cat6 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	RKPX - UIP802	RKPX - UIP1602	RKPX - UIP3202
	1	1	0	RKPX - U802	RKPX - U1602	RKPX - U3202
	1	0	0	RKPX - U801	RKPX - U1601	RKPX - U3201

Cat6 KVM Dongle : DG-100S (VGA-USB) / DG-100 (VGA-PS/2) / DG-100SD (DVI-USB)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM-KIT.pdf

Matrix DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	1	1	RKPX - MIP813	RKPX - MIP1613	-
	1	1	2	RKPX - MIP824	RKPX - MIP1624	-
	1	1	0	RKPX - M802	RKPX - M1602	-
	1	2	0	RKPX - M803	RKPX - M1603	-
	1	3	0	RKPX - M804	RKPX - M1604	-

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM-KIT.pdf

Combo DB-15 KVM	Local	Remote	IP	8-port	16-port	32-port
	1	0	1	RKPX - IP802	RKPX - IP1602	-
	1	1	0	RKPX - 802	RKPX - 1602	-
	1	0	0	RKPX - S801	RKPX - S1601	-

Combo DB-15 KVM Cable : CE-6 / 10 / 15 (6, 10 or 15 ft)

www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM-KIT.pdf

DVI-D KVM	Local	Remote	IP	12-port	-	-
	1	0	0	RKPX - 1201D	-	-

DVI-D KVM Cable : CI-6 / 15 (6 or 15 ft)