


Type Designation CR 123 A  
 Designation IEC CR 17345  
 System Li-MnO<sub>2</sub>  
 Shelf Life \* 10 years  
 Nominal Voltage [V] 3  
 Typical Capacity C [mAh] 1430  
 Permissible Temperature Range - 20 °C ... 60 °C  
 Weight, approx. [g] 16  
 Volume [ccm] 7.5  
 Dimensions [mm] min: max:

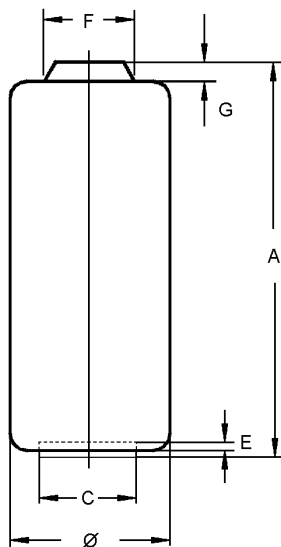

∅	16.0	17.0
A	33.5	34.5
C	11.0	11.5
E	0.5	0.9
F	5.9	6.1
G	1.0	1.2

**Typical Capacities (at 20°C)**

Discharge Type	Load	End Voltage[V]	1,55
Photo	900 mA	Time [cy]	1660
		Capacity [Ah]	1.245
		Energy [Wh]	3.0
Discharge Type	Load	End Voltage[V]	2.0
Service Output Test	100 Ω	Time [h]	51.0
		Capacity [Ah]	1.43
		Energy [Wh]	3.92

\* In consideration of typical loss of capacity at storage and application.

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**