

 **CORMIDI S.r.l.**  
Via Fonte, 342  
84069 Roccadaspide (SA) Italy  
Tel. +39 0828 943688  
Fax +39 0828 943963  
[www.cormidi.com](http://www.cormidi.com)  
[www.minidumper.it](http://www.minidumper.it)

**Cormidi Usa**   
25 Broad St.  
Norwalk, CT - USA 06851  
tel +1 203-846-6120  
[art@cormidiusa.com](mailto:art@cormidiusa.com)  
[www.cormidiusa.com](http://www.cormidiusa.com)


customer service: [info@cormidi.com](mailto:info@cormidi.com)

MINIDUMPER


MINILINE

graphic design: Massimo Marini Lualà

Versioni disponibili / Versions disponibles

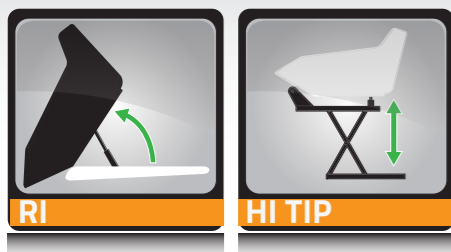

Equipaggiamento std / Équipement standard

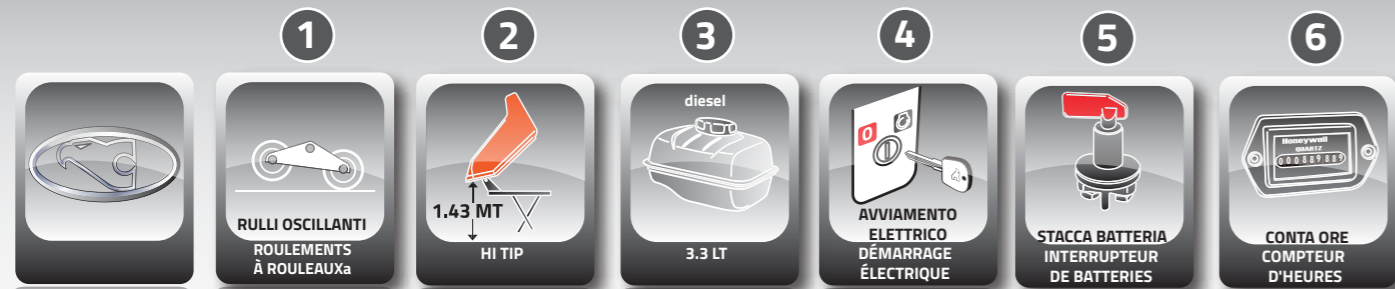

C50 Series



Dati Tecnici / Données techniques

C6.50 Diesel

<b>Motore / Moteur</b>	
Diesel / Diesel	Yanmar LA 5.0 hp / Yanmar LA 7.5 hp
<b>Trasmissione / Transmission</b>	
Tipo / Type	Idrostatica / hydrostatique
Pompa idraulica / Pompe hydraul.	n°3 ad ingranaggi/ à engrenages
<b>Sottocarro cingolato / Châssis</b>	
Larghezza Cingoli / Largeur de chenilles	180 mm (7.1 in)
Rulli oscillanti / Roulements à rouleaux	Si / Oui
<b>Impianto idraulico / Plomberie</b>	
Pompa idraulica / Pompe hydraulique	n°3 ad ingranaggi / à engrenages <sup>1</sup>
Flusso Std / Flux Std	1x13l/min/(1x3.4 gpm) <sup>2</sup>
Hi-flow / Flux Hi-Flow	1x16l/min (1x4.2 gpm) <sup>2</sup>
Pressione massima / Pression maximale	175 bar (2550 psi)
<b>Prestazioni e dimensioni / Performances et dimensions</b>	
Velocità / Vitesse de deplacement max	0-2.9 Km/h (0-1.8 mph) <sup>1</sup>
Velocità / Vitesse de deplacement max	0-4.0 Km/h (0-2.5 mph) <sup>2</sup>
Peso / Poids	320 kg (706 lb) to/a 470 kg (1035 lb)
Capacità operativa / Capacité opérationnelle	500 kg (1100 lb)

<b>RI</b>	Capacità lorda / Capacité brute	0.20 mc <sup>3</sup> / 0.26 yd <sup>3</sup>
<b>HI TIP</b>	Capacità lorda / Capacité brute	0.23 mc <sup>3</sup> / 0.30 yd <sup>3</sup>

1) Modello 1 velocità / Modèle 1 vitesse 2) Modello 2 velocità / Modèle 2 vitesse

Dati Tecnici / Données techniques

C6.50 Benzina / Essence

<b>Motore / Moteur</b>	
Benzina / Essence	Honda GX 200 6.5 hp
<b>Trasmissione / Transmission</b>	
Tipo / Type	Idrostatica / hydrostatique
Pompa idraulica / Pompe hydraul.	n°3 ad ingranaggi/ à engrenages
<b>Sottocarro cingolato / Châssis</b>	
Larghezza Cingoli / Largeur de chenilles	180 mm (7.1 in)
Rulli oscillanti / Roulements à rouleaux	Si / Oui
<b>Impianto idraulico / Plomberie</b>	
Pompa idraulica / Pompe hydraulique	n°3 ad ingranaggi / à engrenages <sup>1</sup>
Flusso Std / Flux Std	1x13l/min/(1x3.4 gpm) <sup>2</sup>
Hi-flow / Flux Hi-Flow	1x16l/min (1x4.2 gpm) <sup>2</sup>
Pressione massima / Pression maximale	175 bar (2550 psi)
<b>Prestazioni e dimensioni / Performances et dimensions</b>	
Velocità / Vitesse de deplacement max	0-2.9 Km/h (0-1.8 mph) <sup>1</sup>
Velocità / Vitesse de deplacement max	0-4.0 Km/h (0-2.5 mph) <sup>2</sup>
Peso / Poids	300 kg (661 lb) to/a 435 kg (960 lb)
Capacità operativa / Capacité opérationnelle	500 kg (1100 lb)

<b>RI</b>	Capacità lorda / Capacité brute	0.20 mc <sup>3</sup> / 0.26 yd <sup>3</sup>
<b>HI TIP</b>	Capacità lorda / Capacité brute	0.23 mc <sup>3</sup> / 0.30 yd <sup>3</sup>

1) Modello 1 velocità / Modèle 1 vitesse 2) Modello 2 velocità / Modèle 2 vitesse

Accessori/ Accessoires



Dimensions / dimensions

	mm	in
A	1030	40.55
B	1550	61.02
C	1430	56.30
D	700	27.56

