


Steex



Steex Live on clip

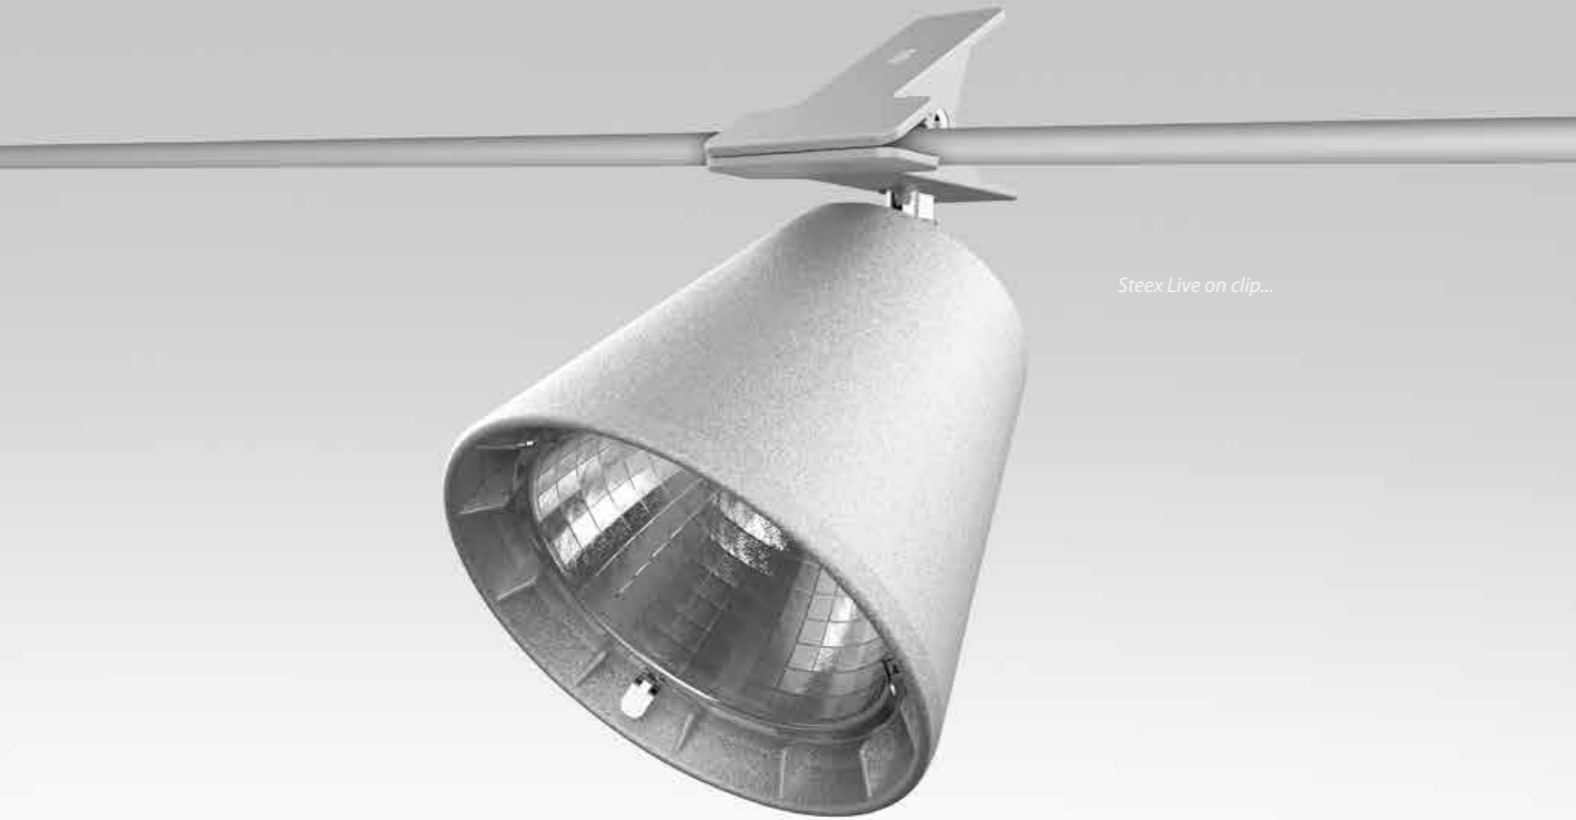

Steex Live on clip...



Steex Live Mini on clip...

Description :

Surface mounted LED spotlight.


Uses :

Supermarkets, shops, etc....

Product informations :

No need for driver / Power supply by 4 m power cord or cord + connector

Dimensions :

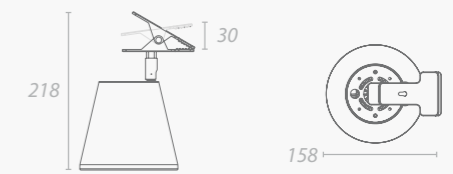

Wattage, luminous flux and performance (CRI > 80):

		Flux	Wattage	Performance	Lamp life
1000 Lm	2700°K	850 Lm	10 W	85 Lm/W	50 000 hours L70 B50
1000 Lm	3000°K	900 Lm	10 W	90 Lm/W	50 000 hours L70 B50
1000 Lm	3500°K	930 Lm	10 W	93 Lm/W	50 000 hours L70 B50
1000 Lm	4000°K	950 Lm	10 W	95 Lm/W	50 000 hours L70 B50
1000 Lm	5000°K	1000 Lm	10 W	100 Lm/W	50 000 hours L70 B50
<hr/>					
2000 Lm	2700°K	1700 Lm	20 W	85 Lm/W	50 000 hours L70 B50
2000 Lm	3000°K	1800 Lm	20 W	90 Lm/W	50 000 hours L70 B50
2000 Lm	3500°K	1860 Lm	20 W	93 Lm/W	50 000 hours L70 B50
2000 Lm	4000°K	1900 Lm	20 W	95 Lm/W	50 000 hours L70 B50
2000 Lm	5000°K	2000 Lm	20 W	100 Lm/W	50 000 hours L70 B50
<hr/>					
3000 Lm	2700°K	2550 Lm	30 W	85 Lm/W	50 000 heures L70B50
3000 Lm	3000°K	2700 Lm	30 W	90 Lm/W	50 000 heures L70B50
3000 Lm	3500°K	2781 Lm	30 W	93 Lm/W	50 000 heures L70B50
3000 Lm	4000°K	2835 Lm	30 W	95 Lm/W	50 000 heures L70B50
3000 Lm	5000°K	2957 Lm	30 W	99 Lm/W	50 000 heures L70B50

Filters :

For standard light sources : Standard / food / bakery / opaline


Mountings :

Mounting on pliers

Finishes :

White (9016G) / Grey (9006G) / Black (9005G) / RAL colour chart

Light distribution curves :

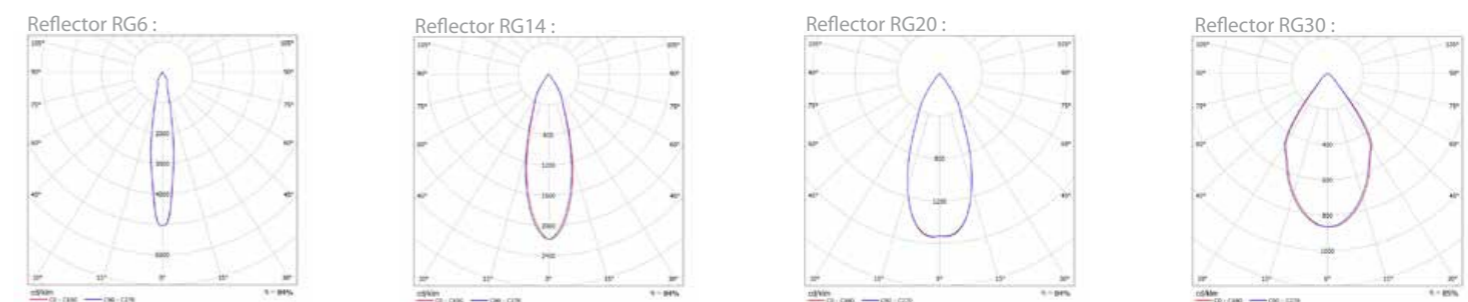

(Ta < 30°C)

Not contractual document

