



# KGS-1064-HP



Preliminary



## Industrial Managed 10-Port L2 Gigabit Ethernet PoE+ Switches with 2 dual-speed SFP Slots

### Product Highlights:

- Web, telnet, SNMP managed
- IPv6 support
- SFP dual speed support
- 8 PoE PSE ports
- RSTP, STP, MSTP support
- Multi redundant ring support
- IGMP & MLD snooping
- PoE PSE redundancy
- OPA function
- ALS function
- Typical industrial power DC12V-30V

### Key Features:

- Eight 10/100/1000Mbps RJ-45 and two dual-speed SFP slots
- All copper ports support auto-negotiation and auto-MDI/MDI-X detection.
- All copper ports are equipped with 802.3at-compliant PoE PSE.
- Two SFP slots support dual speed for 100BASE-FX and 1000BASE-X SFP transceivers.
- Full wire speed forwarding
- Supports 802.3x flow control for full-duplex and backpressure for half-duplex
- Supports SFP with Digital Diagnostic Monitoring (DDM)
- Provides PoE PSE redundancy function
- Provides fiber optical power alarm function
- Provides Automatic Laser Shutdown function
- Powered via typical industrial power voltage DC 12V-30V

### Management Features:

- Management:
  - HTTP/HTTPS/SSHv2/CLI telnet/CLI console/SNMP v1/v2c/v3/RMON
  - DHCP/DHCPv6 client, DNS client, NTPv4
  - IPv6 support, System Syslog, Configuration down/upload, Software upload
  - KTI's private MIB for DDM monitoring, Remote boot, TFTP firmware update via SNMP
- Security:
  - NAS, 802.1X, MAC-based/Web/CLI authentication
  - IP MAC binding, TACACS+, IP source guard
- Layer 2:
  - QoS, 802.1Q/MAC-based/Protocol-based/Private/IP subnet VLAN, Port Isolation
  - Storm control for UC/MC/BC packets
  - Static MAC configuration
  - IGMP v2/v3 snooping, MLD v1/v2 snooping, DHCP snooping
  - Multiple Spanning Tree – MSTP, RSTP, STP
- KTI's Auto Multi-Ring (KAMR) Technology:
  - Fast failover response time
  - Auto recovery when failure is repaired
  - Supports up to three redundant rings
  - Works with RSTP network
  - Supports ring member status monitoring for up to 100 units

KGS-1064-HP Ports



## Specifications:

Standard	IEEE 802.3, 802.3ab, 802.3z, 802.3x, 802.3at, 802.1x, 802.1w, 802.1D, 802.1Q
Network Ports	8 10/100/1000Mbps Gigabit copper ports 2 1G/100Mbps SFP slots
Copper Port	Shielded RJ-45, 10/100/1000Mbps, auto-negotiation, auto-MDI/MDI-X support
Mini-GBIC SFP	SFP connector Interface: 1000BASE-X and 100BASE-FX support
Console	Connector: Shielded RJ-45 Interface: RS-232 with Galvanic isolation
Network Cables	10/100/1000Mbps copper: Cat.5 up to 100m 1000Base-X: 62.5/125 $\mu$ m, 50/125 $\mu$ m MM fiber, 9/125 $\mu$ m SM fiber
Power over Ethernet	IEEE 802.3at compliant (High power PoE) PSE 35W max. at port output for a Cat.5 distance of 100 meters 90W max. shared by all ports
MAC Addresses	Table with 8K entries
Buffer Memory	4Mbits
LED Indication	Per unit: Power, Management status Per port: Speed, link/activity/PoE status Per SFP: Speed/link/activity status
Relay Output	Alarm: power failure, specific port link fault Interface: 2 terminal contacts (30VDC/1A max. or 120VAC/0.5A max.)
DC Power Input	Flange terminal block: 2 pairs of +/- contacts Operating voltage range: +12 ~ +30VDC
Power Consumption	14W max.@24V (Full load with no PoE support) 113W max.@24V (with PoE function)
Housing	Enclosed metal with no fan
Dimension	40 x 106 x 140 mm (WxDxH)
Mounting Support	DIN-Rail, Panel Mounting (Optional)
Environment	Operating Temperature: -30°C ~ 60°C Storage Temperature: -40°C ~ 85°C Relative Humidity: 5% ~ 95% non-condensing
Approval	FCC Class A, VCCI Class A, CE mark Class A, EN60950-1 safety EN55022 emission, EN61000-3-2, EN61000-3-3, EN61000-6-2 Immunity for industrial environment, EN 50121-4 Railway environment IEC 60068-2-64 Vibration, IEC 60068-2-27 Shock 50G test



FCC Part 15, Class A  
CISPR 11 Class A


### Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,  
Hsi-chih District, New Taipei City, Taiwan  
Tel: 886-2-2698-3878  
Fax: 886-2-2698-3873  
E-mail: [kti@ktinet.com.tw](mailto:kti@ktinet.com.tw)  
URL: <http://www.ktinet.com.tw>


### KTI Networks Inc.

10415-A Westpark Drive, Houston,  
TX 77042. U.S.A.  
Tel: 1-713-266-3891  
Fax: 1-713-914-0555  
E-mail: [contact@ktinet.com](mailto:contact@ktinet.com)  
URL: <http://www.ktinet.com>

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.  
This information is subject to change without prior notice.

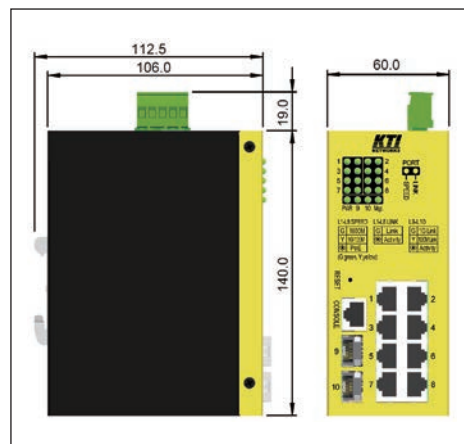

DIN-Rail Dimension

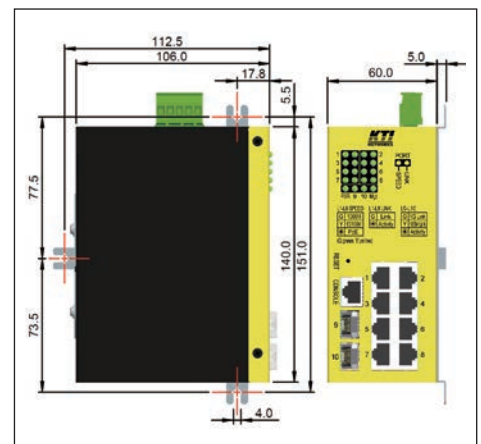

Panel Dimension