

# Push Around Scissor Lifts



Dimensions	Pop-Up	Pop-Up+
Max. working height	3.6m	4.5m
Max. platform height (A)	1.6m	2.5m
Platform length	1.02m	1.02m
Platform width	0.53m	0.53m
Stowed platform deck height (E)	0.53m	0.71m
Operating dimensions	0.70 x 1.13m	0.70 x 1.20m
Overall width (B)	0.70m	0.70m
Overall length (C)	1.13m	1.20m
Stowed height (D)	1.64m	1.80m
Colour	Red	Black
Guardrail height	1.10m	1.10m
Toeboard height	150mm	150mm
Ground clearance	50mm	50mm

Performance		
Platform capacity (SWL)	240kg	240kg
Max. operating wind speed	0m/s	0m/s
Raise/lower time	8/8 sec	24/25 sec
Lifts on a single charge	300	150
Castors	Heavy duty, shock absorbing	
Controls	Push button on pendant	

Power		
Power source	0.7kW 12V DC	
Battery	1x80Ah sealed	

Weight		
Gross weight	235kg	343kg
Max wheel load (at full SWL)	350kg	350kg

## Pop-Up Range

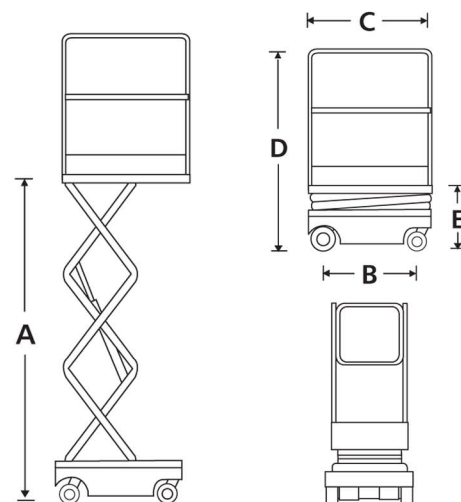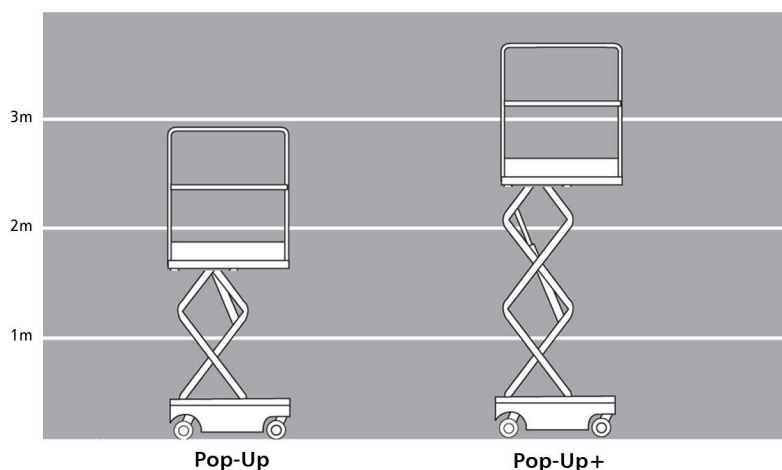

## standard features

- Auto-brake castors (Pop-Up+)
- Bubble level indicator
- Self-closing swing gate
- Heavy duty, shock absorbing non-marking castors
- Integrated automatic battery charger 90-240V

## options

- Special paint colours
- Buffer wheel wall protection kit
- Confined space guardrails
- Stock picker guardrails
- Outriggers for wind load conditions



Vigo Centre, Birtley Road,  
Washington, Tyne & Wear,  
NE38 9DA, U.K.

Tel: +44 (0)845 1550 057

Fax: +44 (0)845 1557 756