



ZEPRO ZAEHD 200

SPECIAL LIFT FOR VEHICLES WITH TOW HOOKS



Special lift for vehicles with underslung tow hook. Includes three-piece underrun protection. Frame mountings supplied separately. The frame is bolted to the drawbeam to save space. Lifting capacity of 1500 and 2000 kg.



Available in two arm lengths for lifting heights up to 1710 mm.

- For 25.25 m rigs, retracted tow hook
- Mountings available for most vehicle models and towing solutions on the market
- Steel or aluminium platform in a range of sizes
- Double-acting tilt cylinders
- Hydraulics installed in a separate hydraulic box on the side of the lift
- Adjustable three-piece underrun protection

ACCESSORIES

- Rollstops
- Warning lamps
- Drive over lock
- Extra controller
- Radio controller

ZEPRO ZAEHD 200

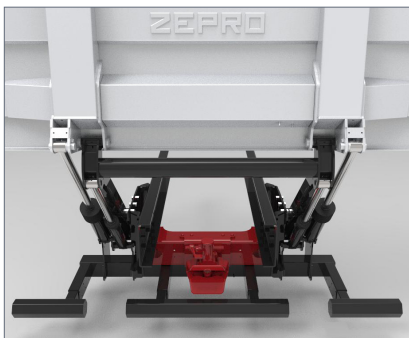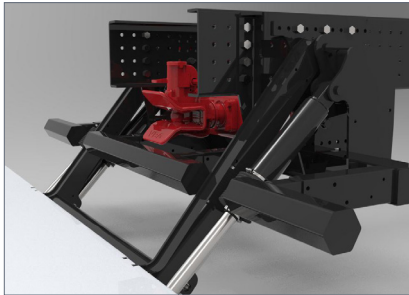

Specifications

Lift heights	1530 or 1710 mm
Lift platforms	Steel or aluminium
1500 kg	Length 1500-2000 steel 1605-2205 alu
2000 kg	Length 1500-2500 steel 1605-2505 alu
Drive	12 or 24 V
Standard colour	ZEPRO grey, RAL 7024. Other colours available as an option (minimum of five units).
Cylinders	Tilt: Double-acting, adjustable Lift: single-acting, double-acting – DA
c/c	140 mm, load centre distance 750 mm
Underrun protection	Three-piece, height-adjustable

Lift platforms Lengths Widths

Steel	1500 – 2500 mm	2450, 2490, 2540, 2560, 2580 mm
Aluminium 40 mm flat	1505 - 2505 mm	2450, 2490, 2540, 2560, 2580 mm

Weights, example

Lift	ZAEHD 2000-155	368 kg
Steel platform	1700x2560 mm 255 kg	2000x2560 mm 302 kg
Aluminium platform	2005x2560 mm 180 kg	2205x2560 mm 194 kg

More information about the ZAEHD 200 is available at zepro.com



Swedish steel combines light weight with high strength



Component guard provides long durability



Manages heavy loads without compromising on safety