



Yuasa Fiche de données techniques

Yuasa YBX3075 - Batteries SMF YBX3000

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|---|------|
| Tension | 12V |
| Capacité (20 heures) | 60Ah |
| Performances en démarrage à froid (EN1) | 550A |

Dimensions

| | |
|----------|-------|
| Longueur | 243mm |
| Largeur | 175mm |
| Hauteur | 175mm |



Poids & Mesures

| | |
|------------------------|--------|
| Poids moyen avec acide | 14.4kg |
|------------------------|--------|

Caractéristiques du bac

| | |
|--------------------------------|--|
| Type de bac | LB2 DIN |
| Système de fixation | B13B14 |
| Indicateur de l'état de charge | ✓ |
| Poignées | ✓ |
| Sortie(s) d'aération | ✓ |
| Type de couvercle | Double capot (anti-écoulement et sans entretien) |

Technologie

| | |
|---------------------------|-------------|
| Dispositif stop-flamme | ✓ |
| Technologie | Ca/Ca |
| Séparateur | PE |
| Test de retournement VDA | ✓ |
| Taux de charge recommandé | 4A |
| Performance Marking | W3-C2-V2-E1 |

Type de bornes

T1

Standard DIN Post



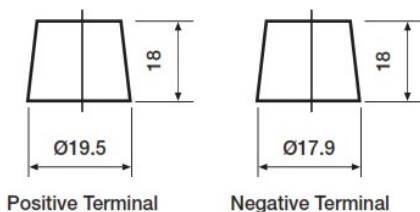


Schéma de montage des éléments

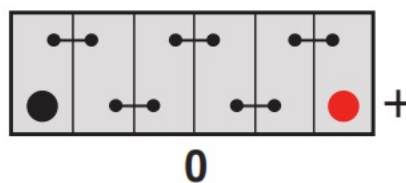

Système de fixation de la batterie

B3/B4 (B3 with Hold-Down adaptor)

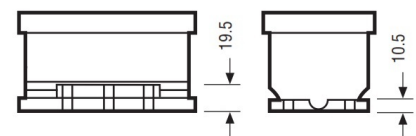

Date de publication: 10/02/2021 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX3075 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 60Ah |
| Cold Cranking Amps (EN1) | 550A |

Dimensions

| | |
|--------|-------|
| Length | 243mm |
| Width | 175mm |
| Height | 175mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 14.4kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | LB2 DIN |
| Hold Down | B13B14 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca |
| VDA Roll Over Test | PE |
| Recommended Charge Rate | ✓ |
| Performance Marking | 4A |
| | W3-C2-V2-E1 |

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

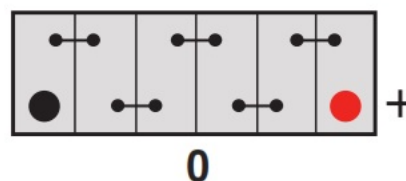

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

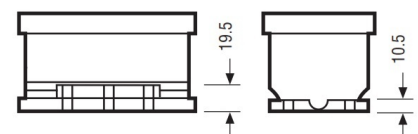

Data Sheet generated on 10/02/2021 - E&OE