


↑ PRESSION / PRESSURE

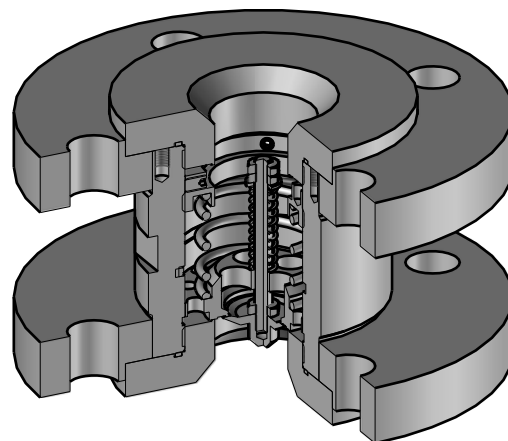

RACCORDEMENTS / CONNECTIONS	BRIDE / FLANGE DN 50 - PN 10
MASSE / WEIGHT	8,01kg
SECTION DE PASSAGE / CROSS SECTION	S=384mm ² - PRESSION / PRESSURE
	S=357mm ² - DEPRESSION / VACUUM
DIMENSIONS	mm
ECHELLE / SCALE	4 : 5

Rep./Item	Qté/Qty	Désignation/Description	Matière/Material
99	2	BRIDE / FLANGE	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
96	3	VIS / SCREW	INOX A2 - 70
95	1	VIS DE REGLAGE / ADJUSTEMENT SCREW	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
91	1	RACCORD DE SORTIE / OUTLET FITTING	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
90	3	ECROU / NUT	INOX A2 - 70
89	1	RONDELLE / SPRING WASHER	1.4307 / X2CrNi18-9 (AISI 304L)
88	1	RESSORT DEPRESSION (SPECIFIQUE) / VACUUM SPRING (SPECIFIC)	1.4310 / X10CrNi18-8 (AISI 302)
87	1	RESSORT PRESSION (SPECIFIQUE) / PRESSURE SPRING (SPECIFIC)	1.4310 / X10CrNi18-8 (AISI 302)
86	1	ANNEAU D'ARRET / THRUST	1.4310 / X10CrNi18-8 (AISI 302)
85	2	JOINT DE CORPS / BODY GASKET	PTFE
84	1	TIGE / STEM	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
83	1	CLAPET DEPRESSION / VACUUM DISC	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
82	1	CLAPET PRESSION / PRESSURE DISC	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
81	1	RACCORD SIEGE / SEAT	1.4404 / X2CrNiMo17-12-2 (AISI 316L)
80	1	CORPS / BODY	1.4404 / X2CrNiMo17-12-2 (AISI 316L)