

HD 10 C vv



Articulated tandem roller

- ▶ Optimal view due to concave front end
- ▶ Excellent view to the drum edges
- ▶ Clear Side - one-sided drum suspension
- ▶ Offset - crab steering
- ▶ Ergonomic driver's platform
- ▶ Modern instrument panel
- ▶ Low working platform, high stability
- ▶ Low machine height
- ▶ 3-point swivel joint for outstanding driving comfort
- ▶ Central suspension point



TECHNICAL DATA

HD 10C VV



HD 10C VV - Articulated tandem roller

| Weights | | |
|---|-------|---------------------------|
| Operating weight | kg | 1575 |
| Maximum weight | kg | 1850 |
| Axle load, front/rear | kg | 770/805 |
| Static linear load, front/rear | kg/cm | 7,7/8,1 |
| Machine dimensions | | |
| Max. working width | mm | 1060 |
| Turning radius, inside | mm | 2002 |
| Diesel engine | | |
| Manufacturer | | HATZ |
| Type | | 3W35 |
| Number of cylinders | | 3 |
| Power rat. DIN/ISO3046IFN kW/PS/rpm | | 15,7/21,4/2700 |
| Power rating SAE J1349, kW/HP/rpm | | 15,7/21,0/2700 |
| Drive | | |
| Hydrostatic drive, front/rear | | Hydr. motor/hydr. motor |
| Speed, infinitely variable | km/h | 0 - 10,0 |
| Climbing ability, vibration on/off | % | 30/40 |
| Vibration system | | |
| Hydrostatic drive. Front and back vibration lone and double switch, automatic vibration switch-off at overspeed. Manual or automatic vibration control. | | |
| Vibration | | |
| Vibration frequency, front | Hz | 62 |
| Vibration frequency, rear | Hz | 62 |
| Amplitude, front | mm | 0,45 |
| Amplitude, rear | mm | 0,45 |
| Centrifugal force, front | kN | 24 |
| Centrifugal force, rear | kN | 24 |
| Steering | | |
| Steering, type | | Pivoted steering |
| Steering, actuation | | hydrostatic, steer. wheel |
| Steering lock +/- | Grad | 33 |
| Oscillation angle +/- | Grad | 8 |
| Brake system | | |
| Service brake, mode of action | | hydrostatic |
| Service brake, actuation | | Drive lever |
| Parking brake, mode of action | | Spring-loaded/mechanical |
| Parking brake, actuation | | electr. a. autom. |
| Emergency brake, mode of action | | hydr./mech. |
| Emergency brake, actuation | | Emergency stop |
| Sprinkler system | | |
| Water sprinkler, type | | Pressure |
| Actuation, sprinkling | | interval/manual |
| Water tank, capacity | Ltr. | 75 |

Equipment
50 mm crab steering, suspended driver seat, comfort seat with safety belt, 2 multifunctional control levers, hour meter, pilot lamps and emergency stop device, CE-conformity.

Optional
Lighting according to German Road Regulation, 2 working lamps on ROPS, backup alarm, rotating beacon, special paint, sun top, ROPS, edge pressing and cutting equipment, super noise insulation.

Further data on request / subject to change

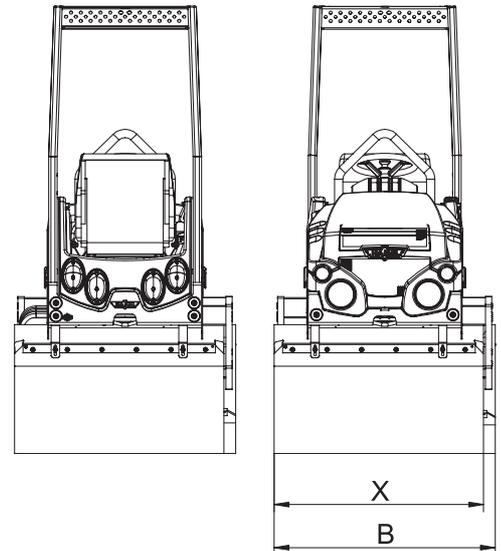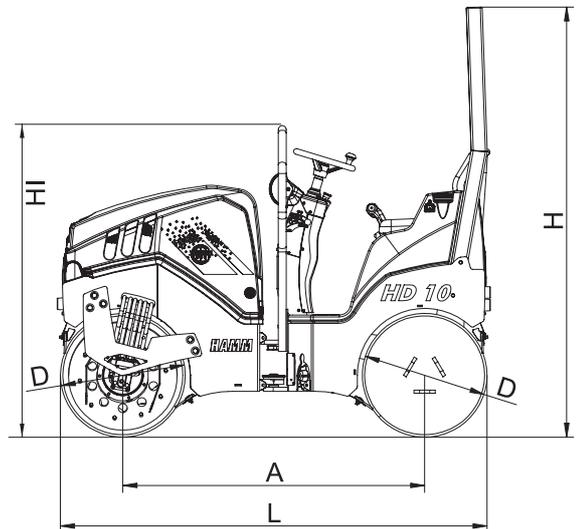

| | | HD 10C VV |
|----------------------|----|-----------|
| Total length | L | 2177 |
| Width | B | 1060 |
| Total height | H | 2155 |
| Wheel base | A | 1500 |
| Roller drum width | X | 1000 |
| Drum diameter | D | 620 |
| Height loading, min. | HI | 1560 |