

Product sheet

MolokDomino® 5m³

ORIGINAL
MOLOK®

Suitability

5m³ MolokDomino is suitable for collecting cardboard, paper, plastic, mixed waste etc.

The container can be divided for two or three lifting bags. With lifting containers (å 500l) the container can be divided up to six separate sections. When divided, the container can be used in collecting glass, metal and organic waste.

Dimensions and materials

Volume	5 m ³
Height	2800 mm, 1500 mm of which is installed under ground
Diameter	1600 x 1600 mm
Well body material	Fiber concrete
Lid and filling lid	HD Polyethylene
Lifting bag	Polypropylene
Reinforced lifting bag	Polypropylene + PVC

Concrete-made well body is completely water proof. Filling hole situates about 1,1 m above ground level. Lifting bag is made of strong woven polypropylene. Safe Working Load (SWL) is indicated in the lifting bag. There is an aluminium lifting ring on the top of the lifting bag. Quick system or four lifting loops are attached to the lifting ring. The closing mechanism is situated at the bottom of the lifting bag. The SWL of 5m³ lifting bag is 1250 kg.

Accessories

Quick system (standard) 1/1, 1/2, 1/3, 2/3
Hinge for 1/1 quick system
Lifting bag (standard) 1/1, 1/2, 1/3, 2/3
Reinforced lifting bag 1/1, 1/2, 1/3, 2/3
Lifting bag for cardboard 1/1
Semi-hard lifting bag 1/1,1/2
Semi-hard reinforced lifting bag 1/1, 1/2
Lifting container, BioSystem 500 l (for 1/3 container)
Side hinge for 1/3 lid
Support catch for the filling lid
Locking for filling lid
Locking for lid

Lid alternatives

Standard lid 1/1, 1/2, 1/3, 2/3
Standard lid with filling slot 1/1

Framing options

Composite board (7 shades)
Recycled plastic board
Aluminium (natural)
Painted aluminium (RAL tones, standard RAL7024)
Print framing



Dividing the wells:

~ 5 m ³ 1/1 5000 l	~ 5 m ³ 1/2 + 1/2 2400 l + 2400 l	~ 5 m ³ 2/3 + 1/3 3200 l + 1600 l	~ 5 m ³ 1/3 + 1/3 + 1/3 3 x 1600 l BioSystem 500 l
-------------------------------------	--	--	--

Standards

Molok®-Deep Collection System complies with the requirements of EN13071-standard.

Molok®-lifting bags are tested according to ISO 21898-standard.

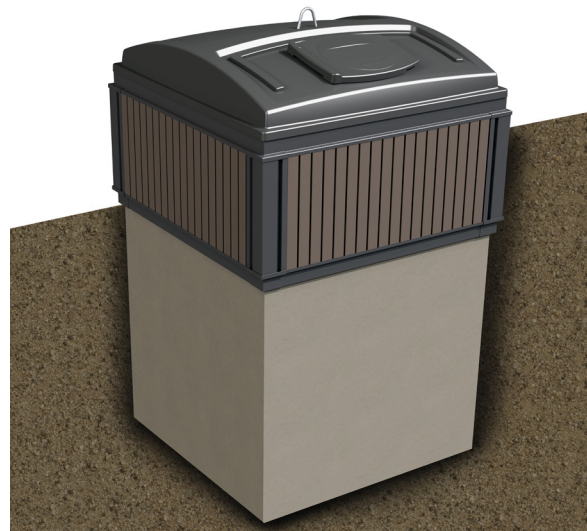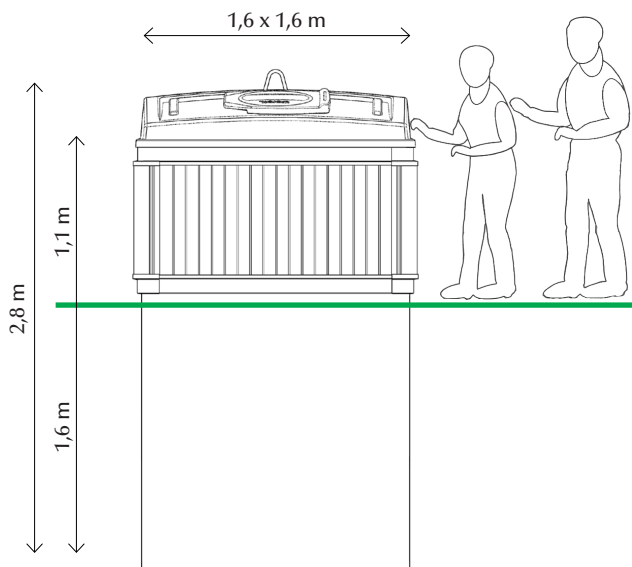

SYVÄKERÄYS®

Product sheet

MolokDomino® 3m³

ORIGINAL
MOLOK®

Suitability

3m³ MolokDomino is suitable for collecting cardboard, paper, plastic, mixed waste, glass, metal etc.

The container can be divided for two lifting bags. With lifting containers (å 500l) the container can be divided up to four separate sections. When divided, the container can be used in collecting organic waste.

Dimensions and materials

Volume	3 m ³
Height	2800 mm, 1500 mm of which is installed under ground
Diameter	1060 x 1600 mm
Well body material	Fiber concrete
Lid and filling lid	HD Polyethylene
Lifting bag	Polypropylene
Reinforced lifting bag	Polypropylene + PVC

Concrete-made well body is completely water proof. Filling hole situates about 1,1 m above ground level. Lifting bag is made of strong woven polypropylene. Safe Working Load (SWL) is indicated in the lifting bag. There is an aluminium lifting ring on the top of the lifting bag. Quick system or four lifting loops are attached to the lifting ring. The closing mechanism is situated at the bottom of the lifting bag. The SWL of 3m³ lifting bag is 1250 kg.


Accessories

Quick System (standard)
Lifting bag (standard) 1/1, 1/2
Reinforced Lifting bag 1/1, 1/2
Support catch for the filling lid
Locking for filling lid
Lifting container, BioSystem 500 l (for 1/2 container)
Side hinge for 1/2 lid

Framing options

Composite board (7 shades)
Recycled plastic board
Aluminium (natural)
Painted aluminium (RAL tones, standard RAL7024)
Print framing

Dividing the wells

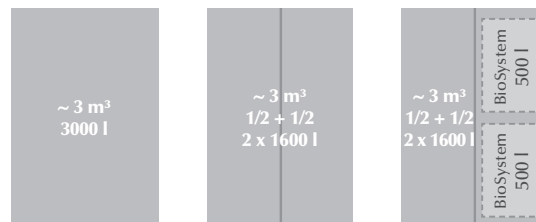

Lid alternatives

Standard lid 1/1, 1/2

Standards

Molok®-Deep Collection System complies with the requirements of EN13071-standard.

Molok®-lifting bags are tested according to ISO 21898-standard.

