




**MODULI UC = con motore a bordo / NUC = con motore remoto** UC units = with built-in air-cooled condensing unit / NUC units = with remote condensing unit

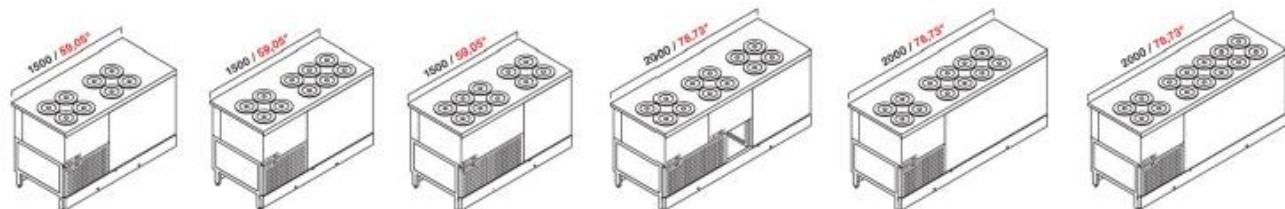


L 1500 UC/NUC 4+4R L 1500 UC/NUC 4+6R L 1500 UC/NUC 6+4R L 2000 UC/NUC 4+4+4R L 2000 UC/NUC 4+8R L 2000 UC/NUC 4+10R

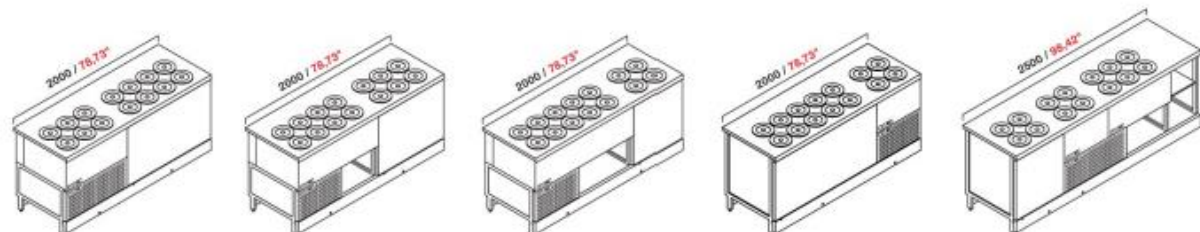

L 2000 UC/NUC 6+8R L 2000 UC/NUC 8+6R L 2000 UC/NUC 10+4R L 2000 UC/NUC 10R+4 L 2500 UC/NUC 4R+4+4+6

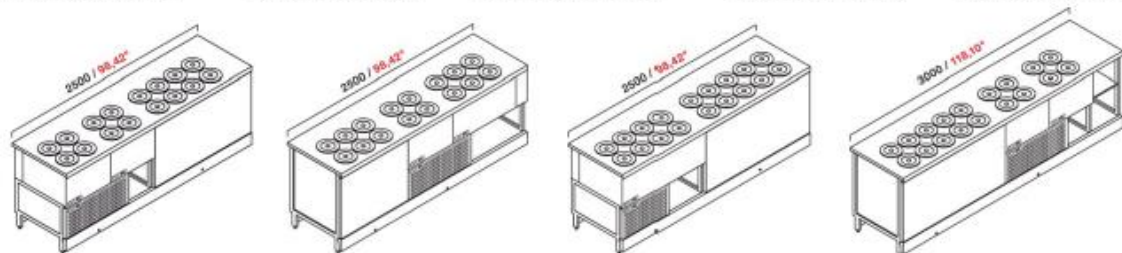

L 2500 UC/NUC 4+4+8R L 2500 UC/NUC 6R+4+6 L 2500 UC/NUC 8+10R L 3000 UC/NUC 10R+4+4

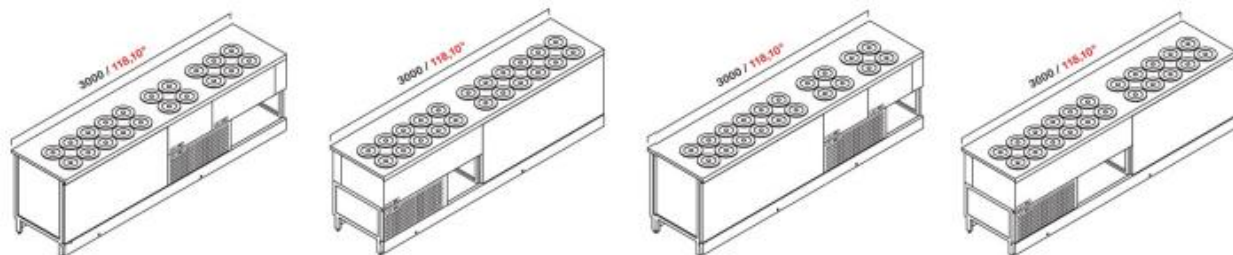

L 3000 UC/NUC 10R+4+6 L 3000 UC/NUC 10+12R L 3000 UC/NUC 12R+4+4 L 3000 UC/NUC 12+10R

**DIMENSIONI, PESO E IMBALLO** DIMENSIONS, WEIGHT AND PACKAGING

MODELLO MODEL	LUNGHEZZA con 2 fianchi LENGTH with 2 end panels		PROFONDITÀ DEPTH		PESO WEIGHT		DIMENSIONE IMBALLO PACKAGING DIMENSIONS		PESO con imballo CRATED WEIGHT	
	mm	in	mm	in	kg	lb	mm	in	kg	lb
L 1500	1560	61.42"	728	28.66"	107	236	1624x911xH1367	63.9"x35.9"xH53.8"	158	348
L 2000	2060	81.10"	728	28.66"	154	340	2124x911xH1367	83.6"x35.9"xH53.8"	218	481
L 2500	2560	100.79"	728	28.66"	196	432	2624x911xH1367	103.3"x35.9"xH53.8"	274	604
L 3000	3060	120.47"	728	28.66"	240	529	3124x911xH1367	123"x35.9"xH53.8"	332	732