


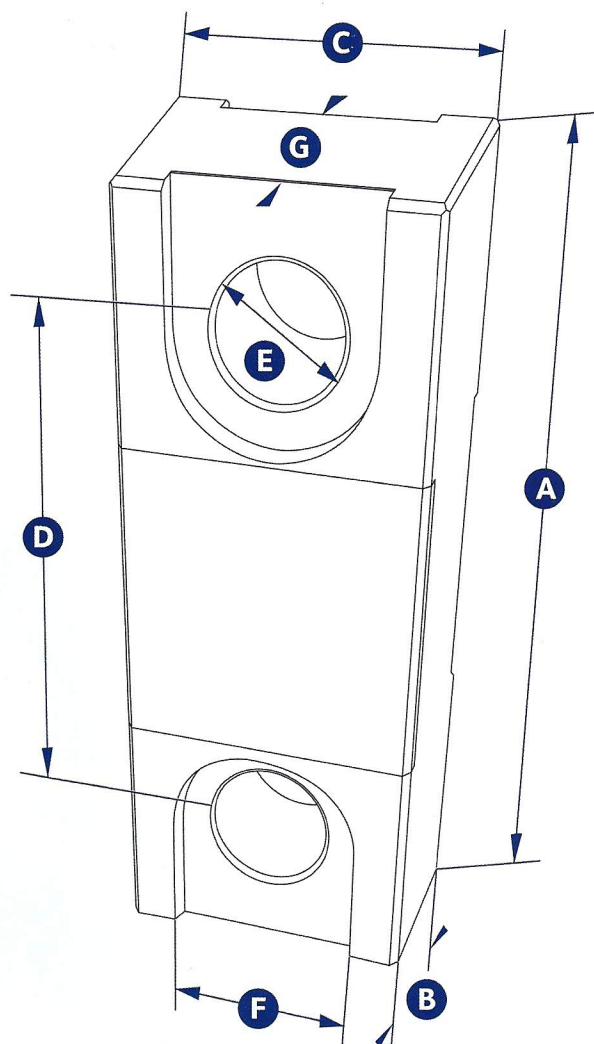

loadlink plus

Part Number	LLP1T	LLP2T5	LLP5T	LLP12T	LLP25T	LLP35T	LLP50T	LLP75T	LLP100T	LLP150T	LLP200T	LLP250T	LLP300T	LLP500T
Capacity	1000kg	2.5te	5te	12te	25te	35te	50te	75te	100te	150te	200te	250te	300te	500te
Resolution	0.5kg	0.001te	0.001te	0.002te	0.005te	0.005te	0.01te	0.01te	0.05te	0.05te	0.1te	0.1te	0.1te	0.2te
Units	te, lbs, kg & kN													
Weight	1.5kg	1.5kg	2.2kg	3.5kg	5.2kg	9kg	11kg	18kg	37kg	51kg	80kg	80kg	132kg	185kg
Safety Factor	12:1	5:1	5:1	5:1	5:1	5:1	5:1	5:1	4:1	4:1	5:1	4:1	4:1	3:1
Battery Type	9v PP3													
Battery Life	80 hours continuous													
Display Type	6 digit 25mm LCD													
Protection	IP65													
Op Temp	-10 to +50c													
Accuracy	± 0.3 % of applied load													
Dimension A	204	204	249	305	340	393	424	470	608	670	700	700	806	930
Dimension B	43	43	43	47	60	75	75	75	99	99	144	144	150	150
Dimension C	101	101	101	101	115	126	163	202	255	303	320	320	426	570
Dimension D	146	146	165	193	215	225	230	260	320	360	350	350	350	450
Dimension E	24.5	24.5	38	47.5	55	60	76	76	109	109	132	132	160	200
Dimension F	47.5	47.5	66											
Dimension G	19	19	32											
Crosby Shackle	G213	G213	G213	G213	G213	G213	G2140	G2140	G2140	G2140	G2140	G2140	G2140	G2160
Loading Pin Ø	19	19	25	35	51	57	57	70	83	95	121	127	152	180

Specifications (mm)