


TraçaMatrix

Marquage - gravure - identification
personnalisation - traçabilité


Unité de marquage à chaud pneumatique S7 UPC

Data sheet
Hot marking
unit without
colour
S 7 UPC

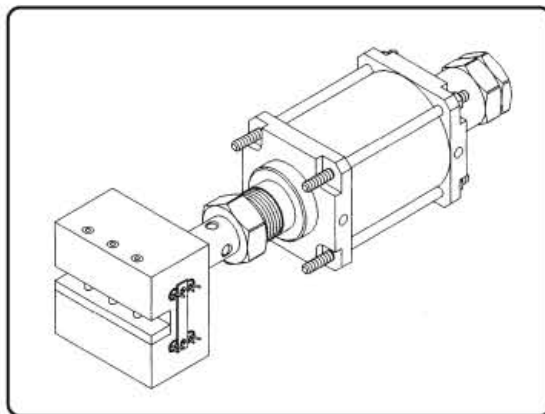

Sound levels
according to
ISO 3746

| | |
|---|--------------------|
| LwA sound power level | dB (A) : 72 |
| LpA sound pressure level at control post | dB (A) : 72 |

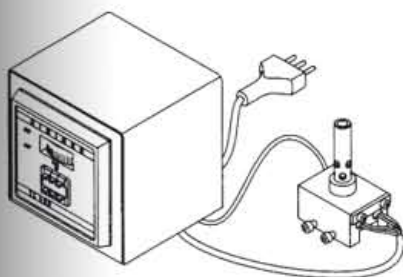

| | |
|--|------------------------------------|
| Toolholder and collet bore | Ø 13 mm |
| Max rod stroke | 42 mm |
| Operating pressure | 4 bar |
| Weight | 4.3 kg |
| Cylinder bore | 65 mm |
| Rod | Ø 28 mm |
| Air consumption for 10 mm stroke (dm³) | thrust = 0.156 traction = 0.136 |
| Thrust at 6 bar | 130 kg |
| Electrical supply | 220 V |
| Power | 150 W |
| Temperature, adjustable | 0 to 350°C |
| Electrical supply | 220 V |
| Power | 150 W |
| Temperature, adjustable | 0 to 350°C |
| Weight | 1.5 kg |



TraçaMatrix

178, rue du Pallon - 54530 ARNAVILLE
Tél. : 06 10 97 61 76 - Fax : 03 68 38 06 38


E-mail : info@tracamatrix.com

Site Web : www.tracamatrix.com



TıraçaMatrix

**Marquage - gravure - identification
personnalisation - traçabilité**

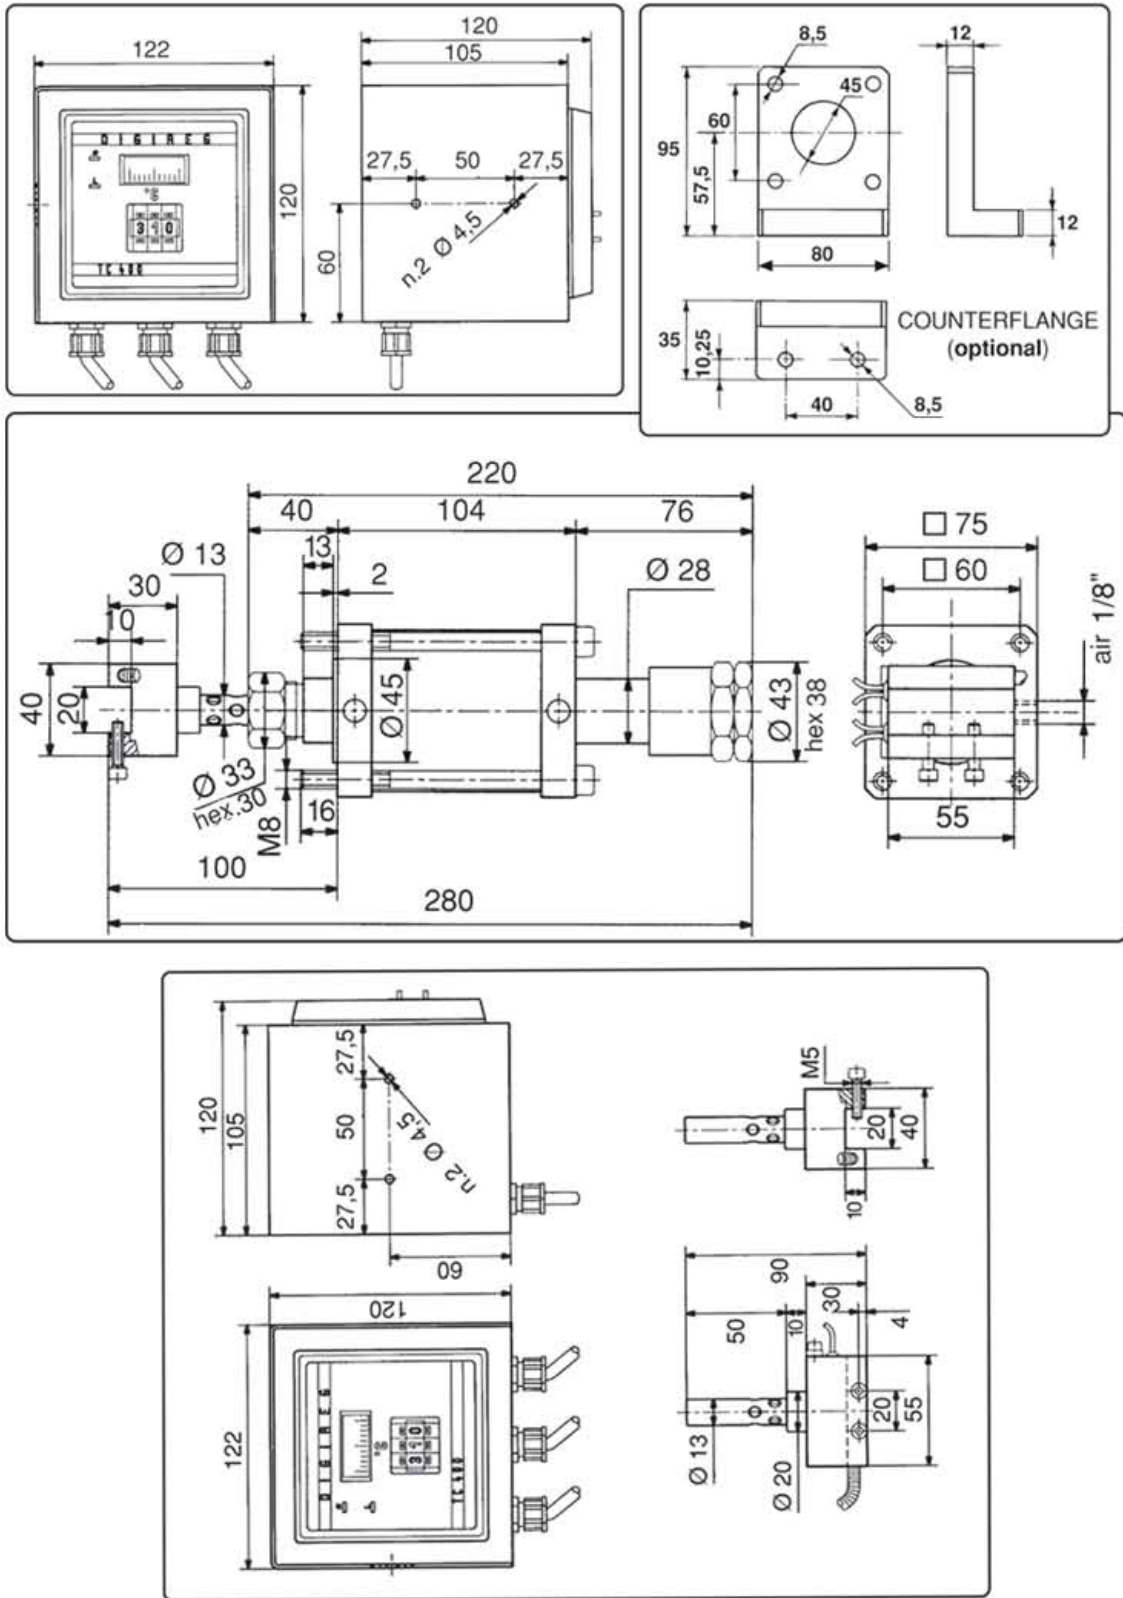

TraçaMatrix

178, rue du Pallon - 54530 ARNAVILLE

Tél. : 06 10 97 61 76 - Fax : 03 68 38 06 38

E-mail : info@tracamatrix.com

Site Web : www.tracamatrix.com

