

Oxbo International
100 Bean Street
Clear Lake, WI
54005

tel 715.263.2112
800.628.6196

To learn more about
Oxbo visit: www.oxbo.com

Specifications	
Dimensions	
Length without header:	327in (8.31m)
Width without header:	110in (2.8m)
Height to top of cab:	151in (3.84m)
Height to top of standard dump box:	157in (3.99m)
Wheelbase:	10ft 11in (3.33m)
Inside turning radius:	21ft (6.4m)
Weight:	26,340lbs. (11,948kg)
Tire options	
Standard tires: 23.1x26	Goodyear Dyna Torque II 12ply bias, Titan High traction lug 16 ply bias or Firestone, Super AT 12 ply bias
Standard tires: 28L-26	Firestone, Super AT 12 ply bias
Standard tires: 620/75R26	Goodyear DT820 Radial
Optional flotation tires: 750/65R26	Michelin MEGAXBIB radial
Engine	
Engine model:*	FPT N45 Tier IV Final
Horsepower:	168hp @ 2200 rpm (125kW)
Dump Box	
Volume:	390ft ³ (11.04m ³)
Dump box lifting capacity	10,000lbs (4,545kg)
Dump height to dump box lip:	8ft - 14ft 1in (2.44m - 4.29m) without extension
Dump angle:	43 degrees
Dump reach without extension:**	20in (0.81m)
Tank Capacities	
Fuel:	169gal (640L)
DEF:	16gal (60.6L)
Hydraulic reservoir:	50gal (190L)
Cooling system:	8gal (30L)
Crankcase:	5.0gal (18.9L)
Harvesting Head Capabilities	
Beans:	Oxbo VPC1200 (120in, 3.05m width)
Beans:	Oxbo VPC1500 (150in, 4.14m width)
Fresh Market Sweet Corn:	Oxbo CP400 (4 rows)
Seed & Processed Sweet Corn:	Oxbo 3000 and 60 Series (4 row max)
Spinach & Greens:	Oxbo SP3500 or SP4500 (3.5 and 4.5m width)

*John Deere 6.8L, Tier 3 engine available in limited areas

** Reach depends on tires. 23.1 x 26 12 ply reach listed

Multi-Crop Harvester



2430



2430

Oxbo proudly introduces the next generation in Oxbo harvesters. A Tier IV FPT engine powers the new Oxbo 2430, multi-crop harvester. It's predecessor, the Big Jack had a global reach spanning 6 continents and the 2430 builds upon those capabilities. The 2430 is the most trusted harvester in the world due to a simplistic design, serviceability, reliability and heritage.

Performance when it counts

- Four-wheel mechanical drive chassis
- Dump box constructed of heavy-duty steel frame sections with optional conveyor to meter product discharge
- Infinitely variable hydrostatic drive motor mated to mechanical transmission for precise speed control

Productivity

- Advanced monitoring and diagnostics system
- Ergonomic joystick puts all functions at operator's fingertips and user-friendly controls easily adjust to optimize yields

- Rapid unload at any height
- Narrow design for easy trailer transport with minimal regulatory restrictions
- Industry standard for green bean cleaning and recovery with efficient airflow design
- Easy access DEF filling space

Multi-harvesting capabilities

- Ideal for the entry-level or multi-crop grower
- Can successfully harvest green beans, sugar snap peas, sweet corn, seed corn and other green crops
- Stalk ejectors available for corn applications

The new Oxbo 2430 continues to carry the features you know and trust, with new technology options and an updated engine package. The 2430 may be compact, but this flexible and powerful harvester can easily adapt to a variety of crops and field conditions.


Multiple head options: Flexibility to utilize multiple harvesting heads depending on your crop



Easy access ladder: New design for operating mode. Simply flip locking lever up and pull ladder out of the way.



Dual cleaning fans: Powerful fans are easily set within the cab for the cleanest loads

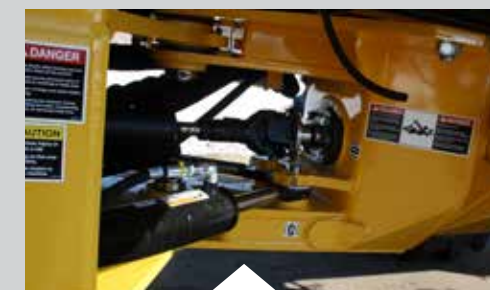

Articulating chassis: Rear wheels track with front wheels for easier, more responsive steering for sharp turns and handling rough field conditions



Comfortable cab: Climate controlled operator station with integrated controls offers full panoramic view



VPC II head: Pairs with a VPC 1200 or 1500 to harvest green beans or other crops

